



Premium Architectural Lighting
By Srishti Lighting



Srishti Lighting®
Lightening Happiness...

PRODUCT
CATALOGUE

2023

About Us !

Welcome to **SRISHTI LIGHTING** , Srishti draws its origins from Sanskrit which means Universe Thus , at Srishti Lighting our endeavour is to bring Quality of Luminescence and its visual beauty to the universe and its mankind.

Established in the year-2014 , Since its establishment **Srishti Lighting** has come a long way from its beginning in Mumbai & exploring to other cities around globe.

LED Lighting consumers in India and around the world benefit from Srishti Lighting's over a decade expertise of design and high volume manufacturing experience in Architectural , Commercial , Residential , Corporate , Industrial , LED lighting Luminaries & Fixtures . Srishti Lighting's unique lighting capabilities consistently deliver higher performance products through a development process that lowers costs and emulate maintenance free results . Regardless of which style you choose , Srishti Lighting comes with options for everything from wattage to colour temperature and from energy saving to that extra spice of glamour , we give you plenty of room to play around . Our endlessly inventive development team incorporates expertise in designs , manufactures and distributes quality lighting luminarie solutions that meet the expectations and requirements of customers , thus enabling them to collaborate with architects , lighting designers , lighting engineers and other designers in the market .

Srishti Lighting has plenty to offer beyond money and energy – saving potential . It has a vision for the future . Our journey continues with the development of innovative products and services together with the encouragement of our key supply partners and continued support of our loyal customers , we at Srishti Lighting see a positive future .

Choose Srishti Lighting for maintenance free , low cost , energy saving experience .

We hope you enjoy our products as much as we enjoy offering them to you . If you have any questions or comments , please don't hesitate to contact us .

You matter to us ! Your Satisfaction is Our Success !!!

THANK YOU ,
Srishti Lighting

Benefits Of LED Lights



EFFICIENT ENERGY USAGE

LED Lights use 15% of electricity of a standard Halogen lamp.

8 to 10
Longer

LIFE SPAN

The life span of LED PRODUCT is 8-10 times longer than standard bulbs.
LED Lights can last up to 50,000 hour over 8 times the lifespan of a Traditional Lights.



FLEXIBLE DESIGN

LED Light Fixtures can be produced in a variety of shapes and sizes.



SAFE NATURE

LED Lights save Nature and It does not have Mercury which are found in Traditional Lamps.



DISPERSAL OF LIGHT

All LED Lighting is primarily designed to focus lights to a specific location or direction, without relying on an external reflector. This means it has higher degree of efficiency than conventional solutions.



RAPID BRIGHTENING

All LED Lights turn on at 100% of their intended brightness every single time .



Magnetic Adjustable Laser Blade



Page No. 11

Magnetic Movable Laser Blade



Page No. 12

Magnetic Laser Blade



Page No. 13

Magnetic Laser Spot Light



Page No. 14

Magnetic Diffuser Laser Blade



Page No. 15

Magnetic Track Spot



Page No. 16



Page No. 16

Magnetic Track Spot



Page No. 17



Page No. 17

Magnetic Track Patti



Page No. 18



Page No. 18

Magnetic Track Accessories



Page No. 19



Page No. 19



Page No. 19



Page No. 19



Page No. 19



Page No. 19




Page No. 19




Page No. 19


Down light Series

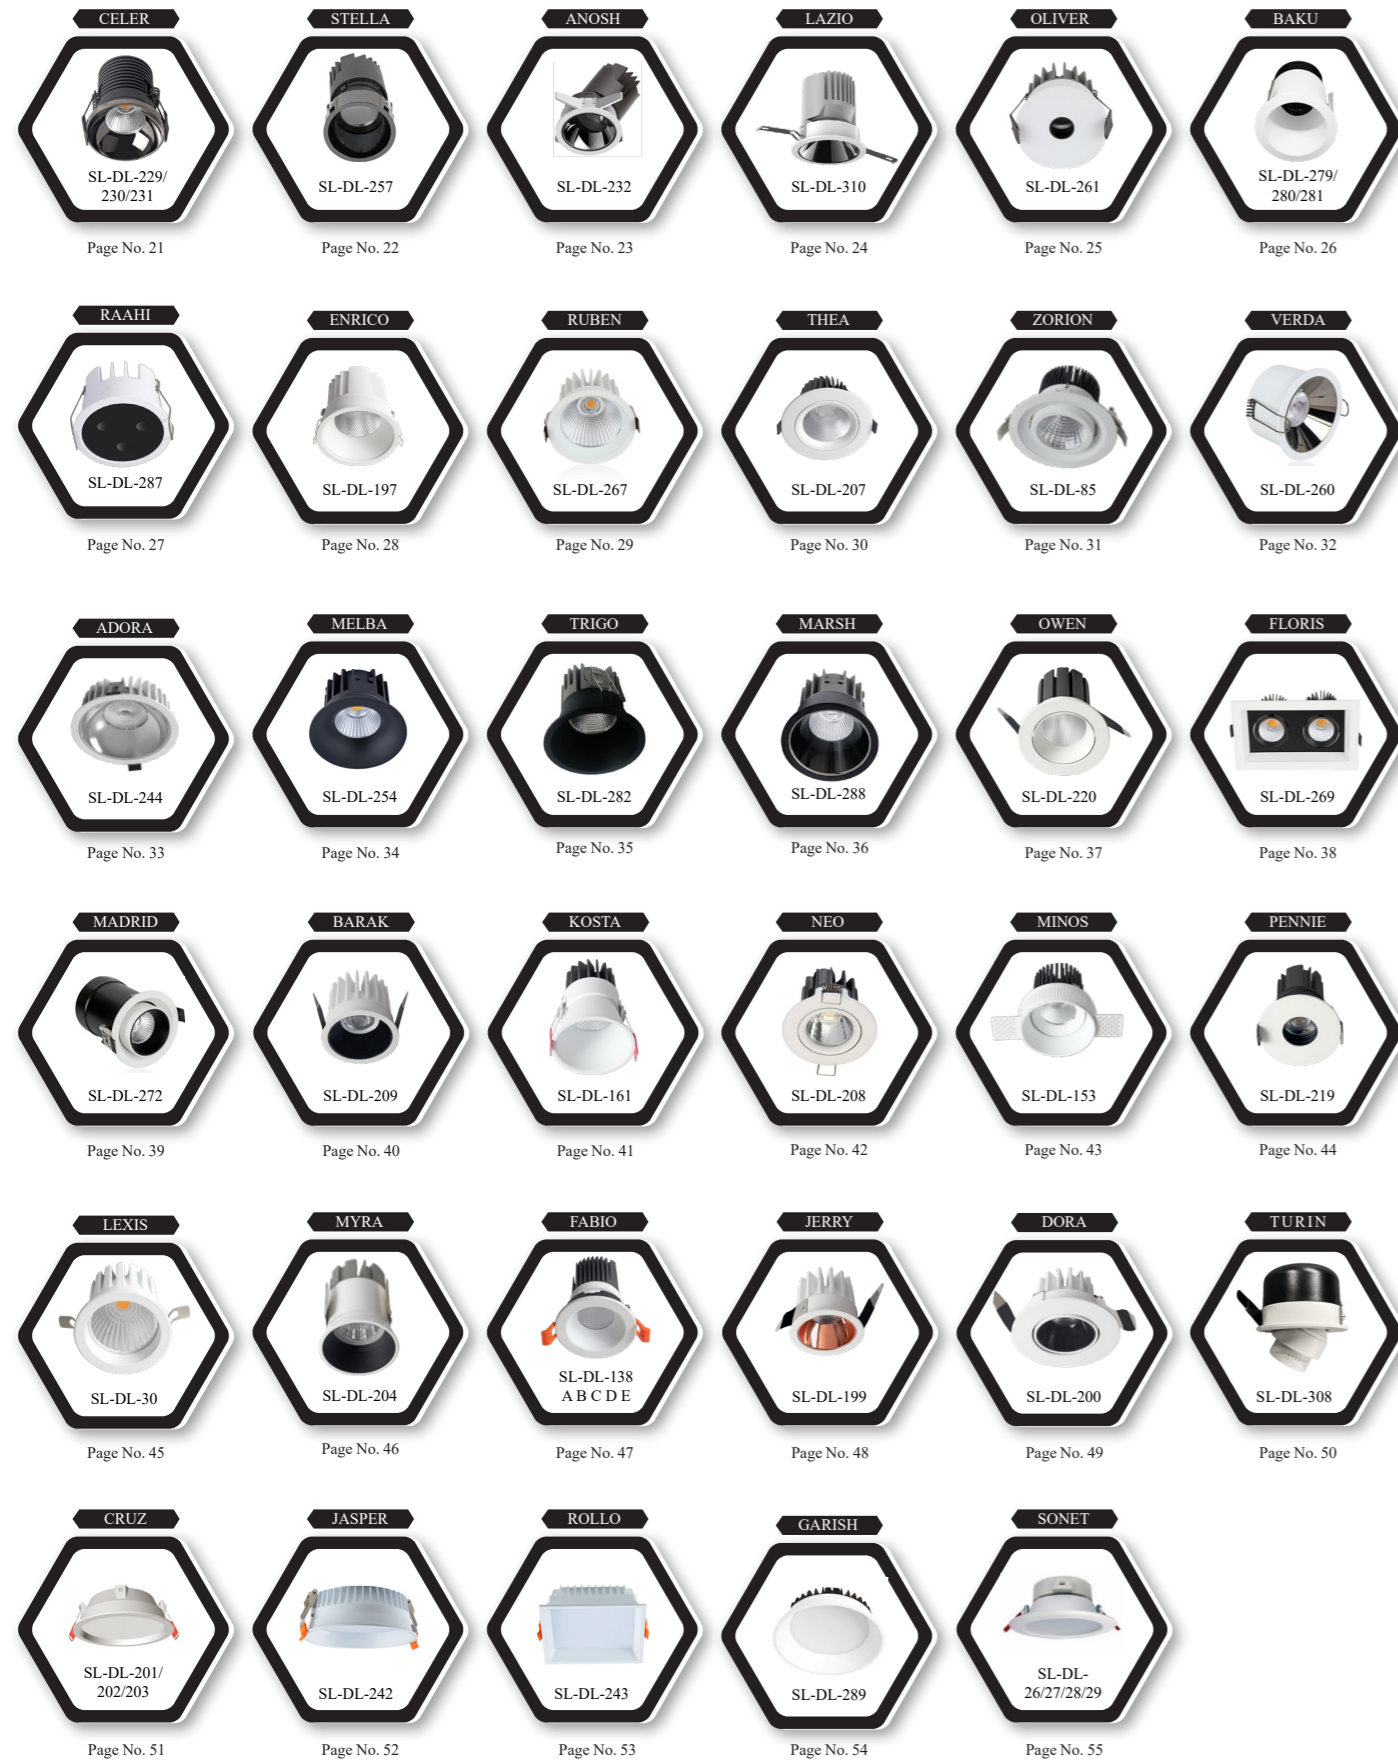


Down light Series

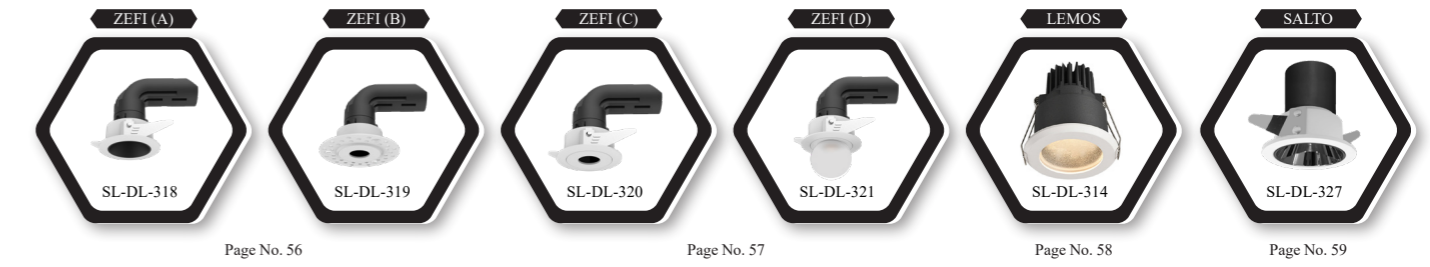


Retrofit Lamp Series

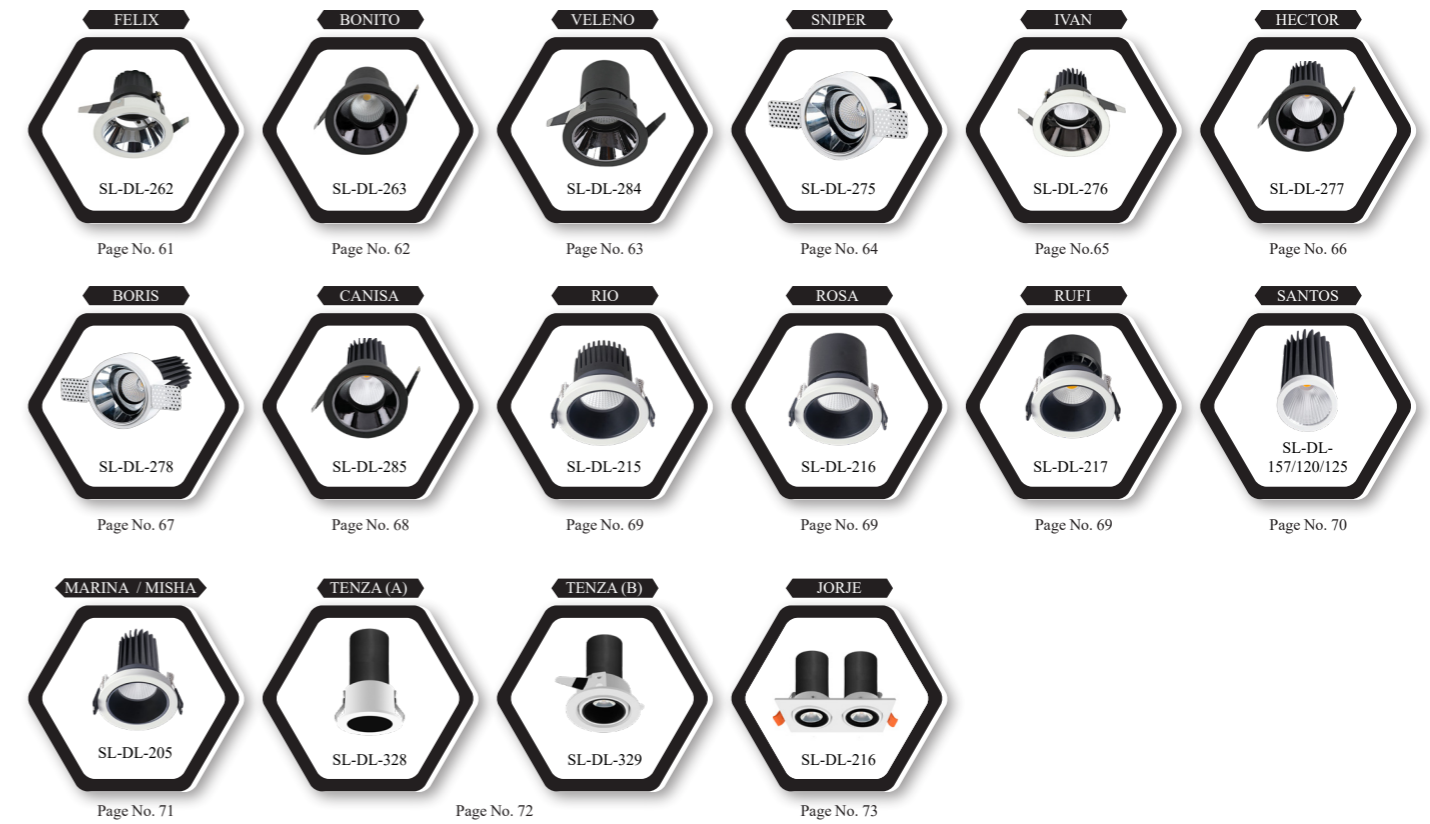


Laser Blade Series

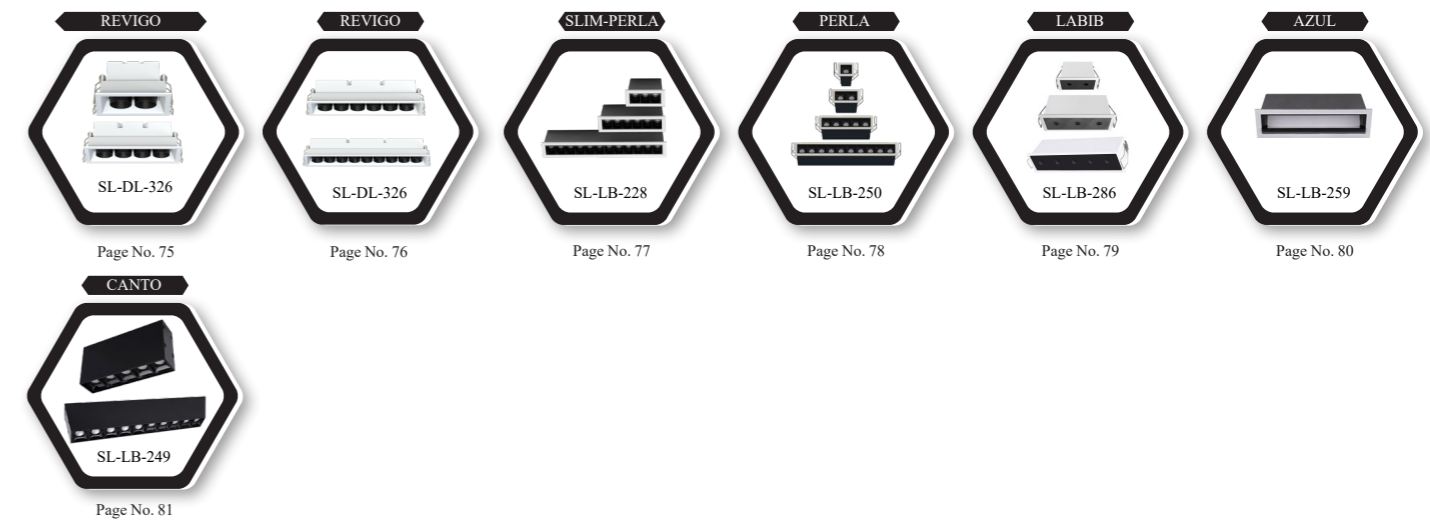


Surface Down Light Series

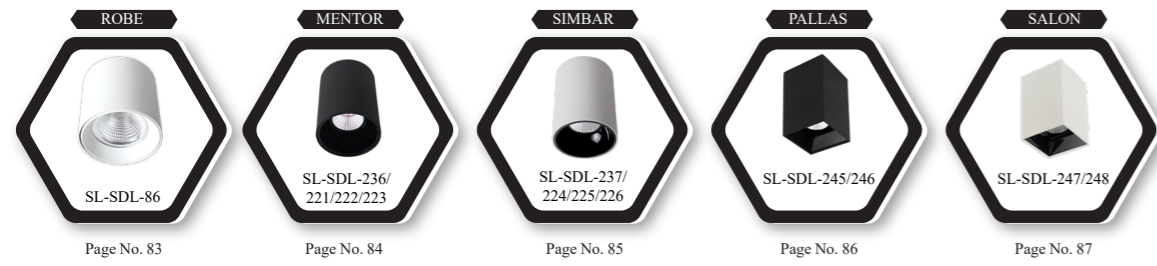


Zoom Light Series

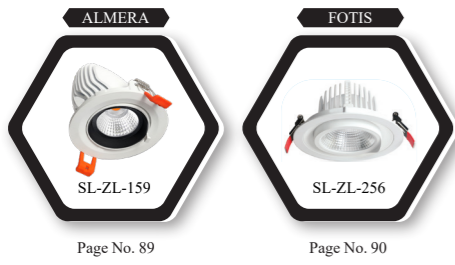

Track Spot Light Series

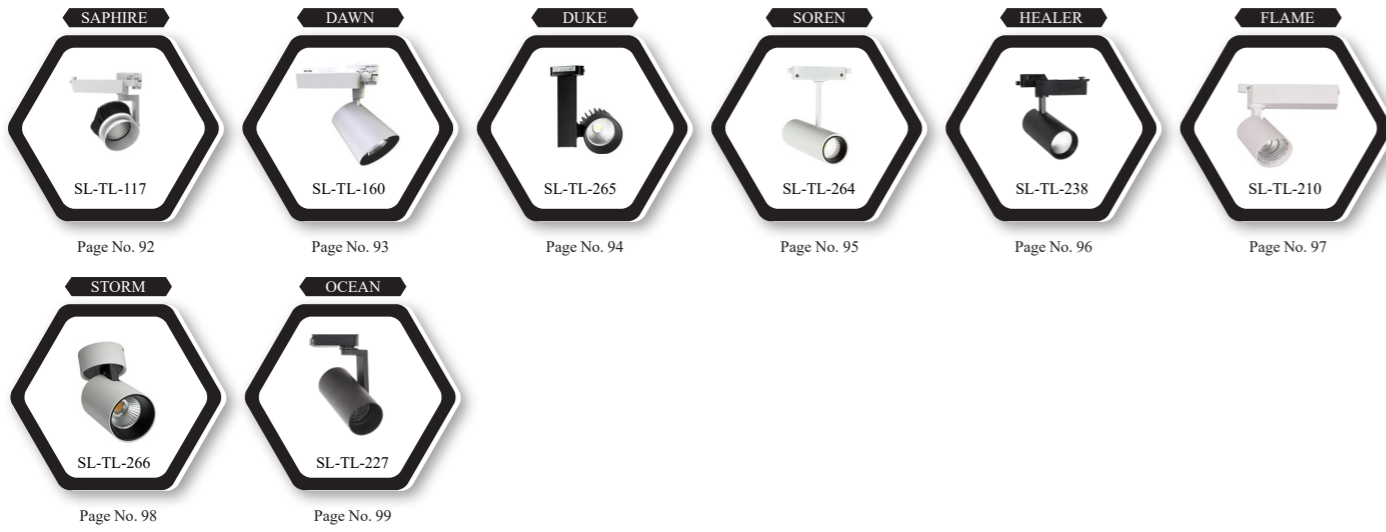


Spot Light Series

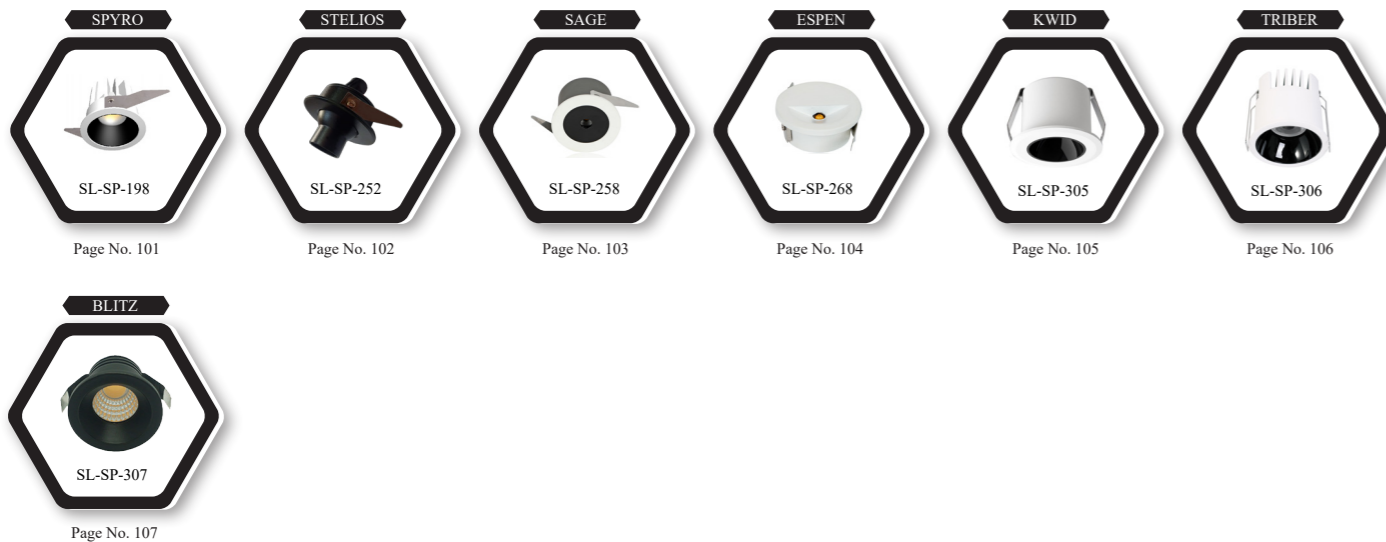

Cabinet Light Series




Picture Light Series



Strip Light Series




Foot Light Series

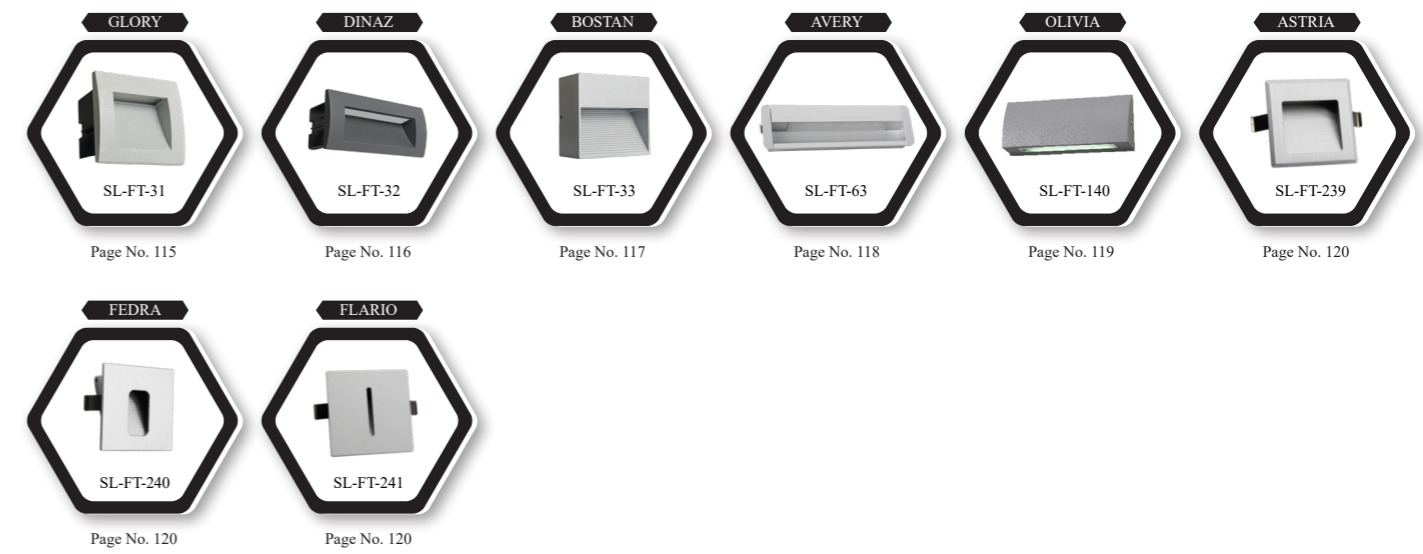

Spike Light Series




Inground Burials Light Series

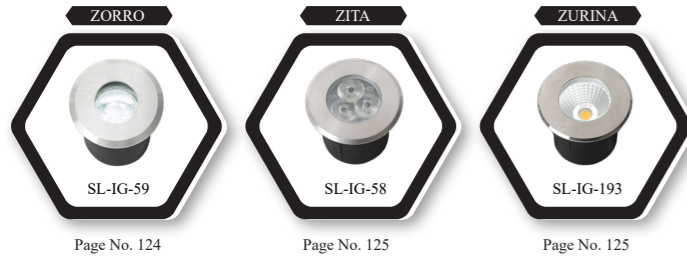


Up & Down Light Series




Liner Profiles Series

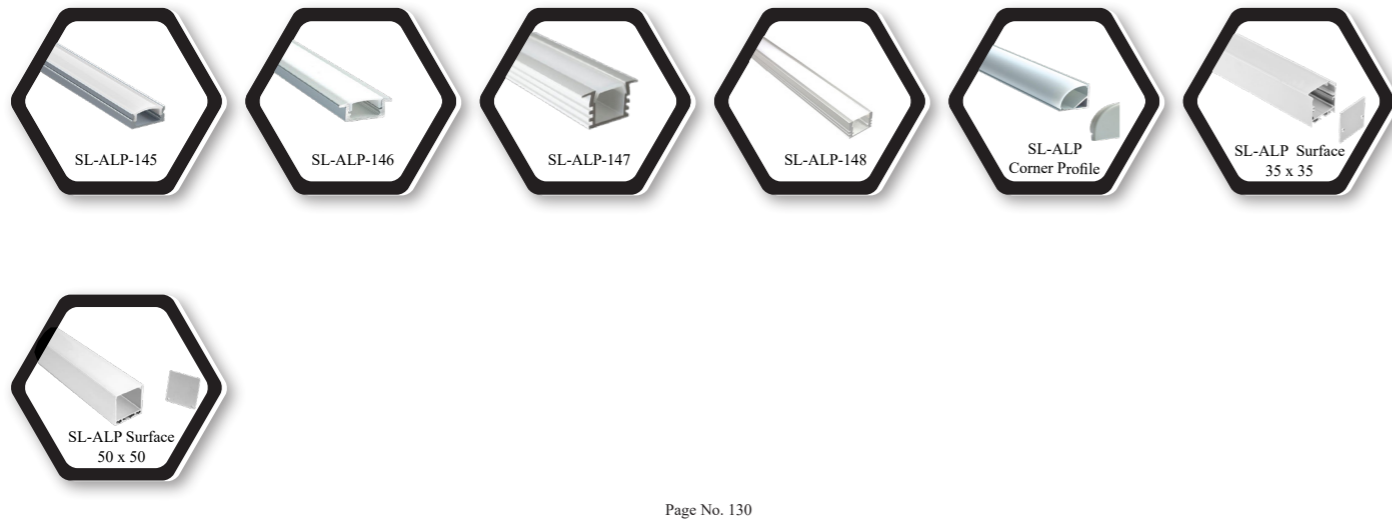

MR16 Housing Series

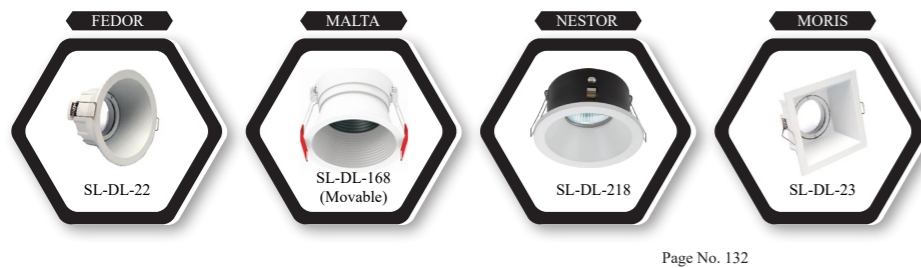

Track Accessories Series

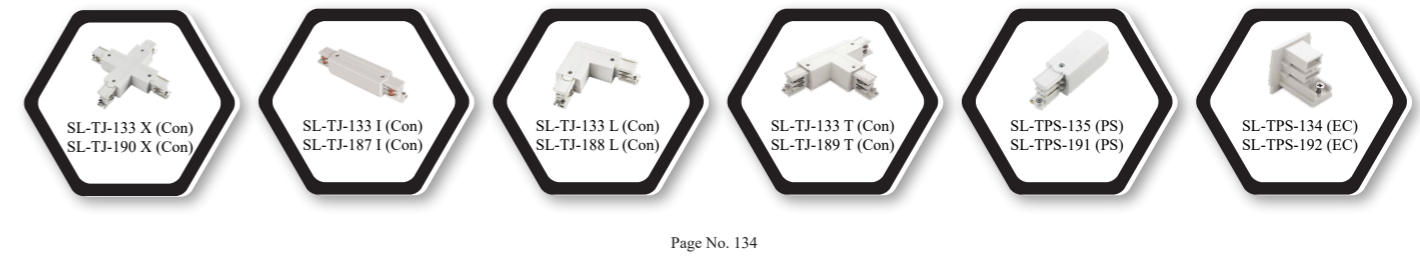

Track Channel Series



Power Supplies Series



Power Supplies Waterproof Series




CCT-Controller & Amplifire






MAGNETIC ADJUSTABLE LASER BLADE

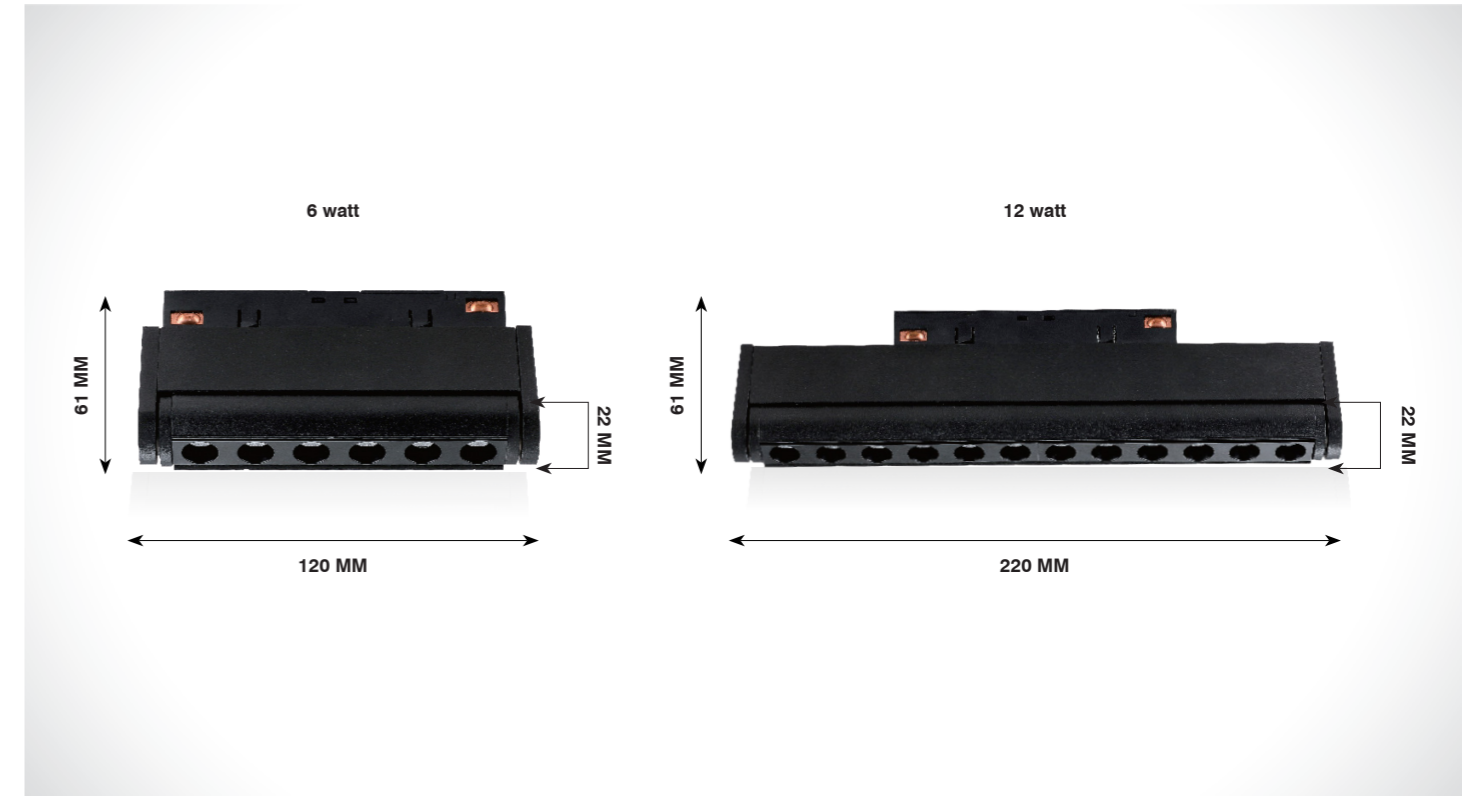


Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-MALB-295-6w-S-W.WHT	80 / 90	3000K	Length	Width	Height	660 lm	48VDC	Housing	Aluminium
SL-MALB-295-6w-S-N.WHT		4000K	120	22	61	720 lm		LED Make	Bridgelux
SL-MALB-295-6w-S-WHT		6500K				750 lm			

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-MALB-295-12w-S-W.WHT	80 / 90	3000K	Length	Width	Height	1320 lm	48VDC	Housing	Aluminium
SL-MALB-295-12w-S-N.WHT		4000K	220	22	61	1440 lm		LED Make	Bridgelux
SL-MALB-295-12w-S-WHT		6500K				1500 lm			

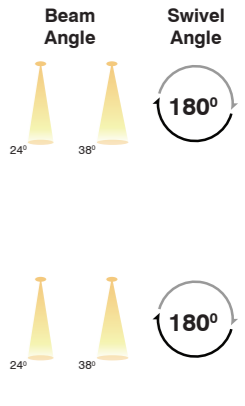


RAVELLO MAGNETIC TRACK
LIGHT SERIES


MAGNETIC MOVABLE LASER BLADE

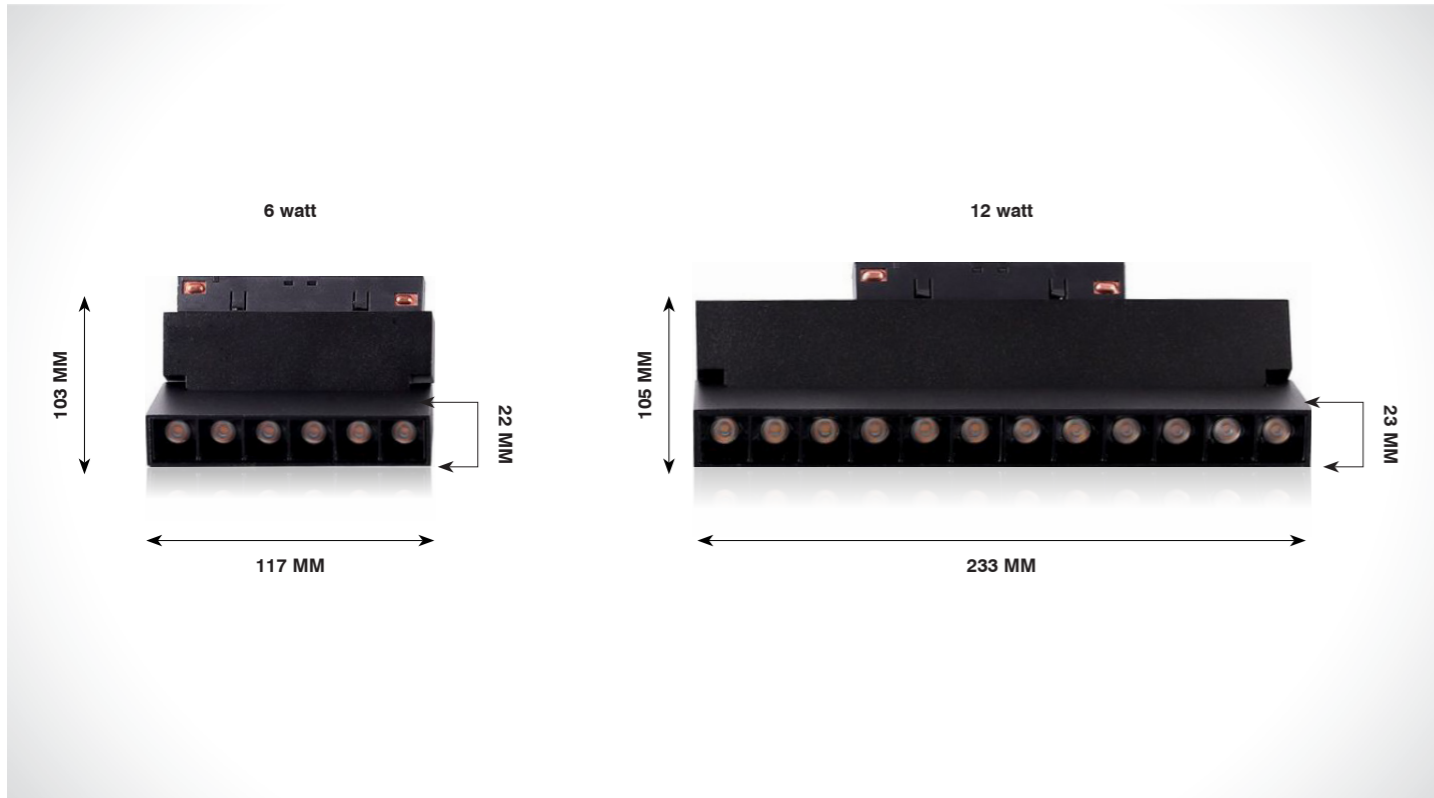


Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-MMLB-294-6w-S-W.WHT	80 / 90	3000K	Length	Width	Height	660 lm	48VDC	Housing	Aluminium
SL-MMLB-294-6w-S-N.WHT		4000K	117	103	22	720 lm		LED Make	Bridgelux
SL-MMLB-294-6w-S-WHT		6500K				750 lm			




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-MMLB-294-12w-S-W.WHT	80 / 90	3000K	Length	Width	Height	1320 lm	48VDC	Housing	Aluminium
SL-MMLB-294-12w-S-N.WHT		4000K	233	105	23	1440 lm		LED Make	Bridgelux
SL-MMLB-294-12w-S-WHT		6500K				1500 lm			



MAGNETIC LASER BLADE

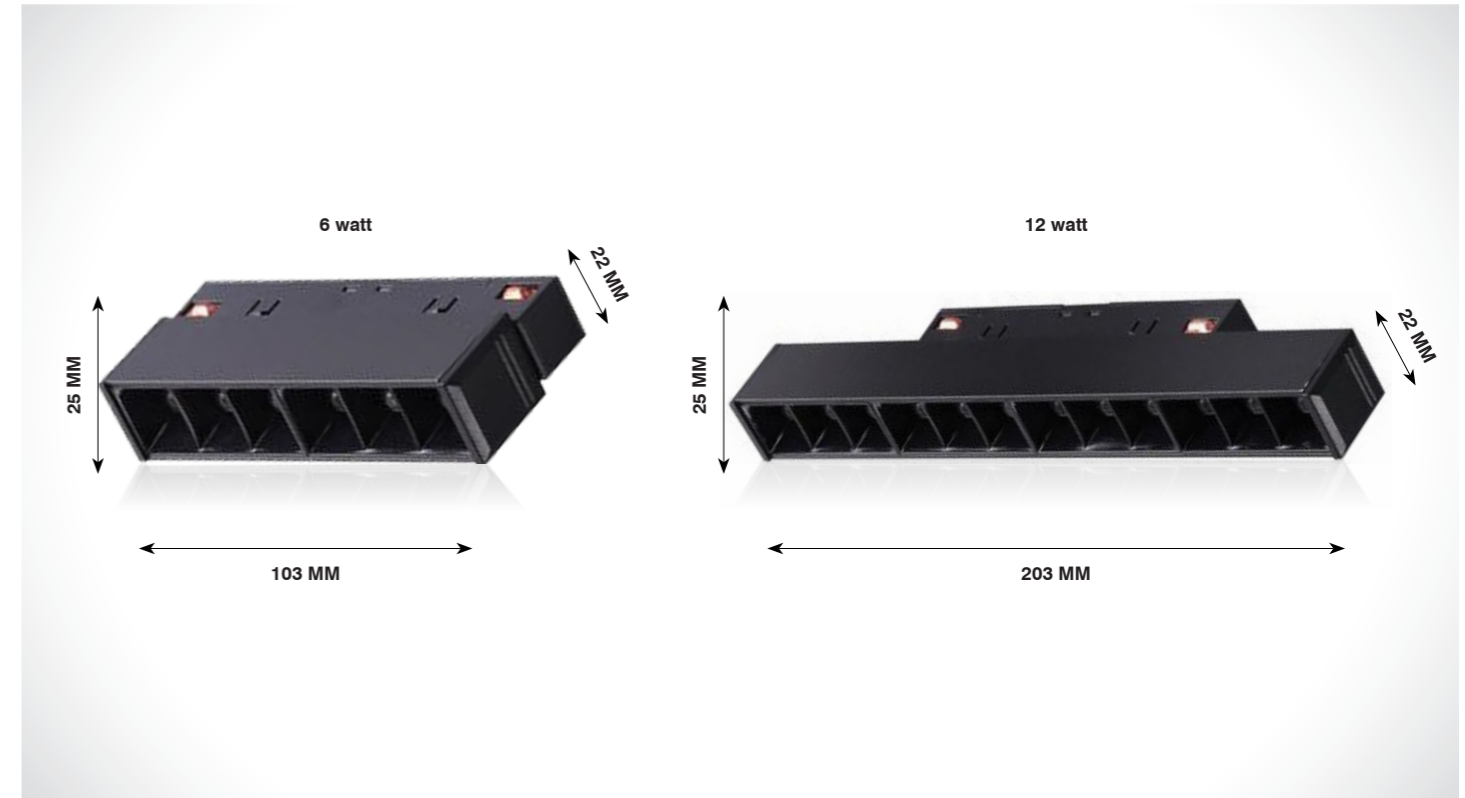


Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-MLB-291-6w-S-W.WHT	80 / 90	3000K	Length	Width	Height	660 lm	48VDC	Housing	Aluminium
SL-MLB-291-6w-S-N.WHT		4000K	103	25	22	720 lm		LED Make	Bridgelux
SL-MLB-291-6w-S-WHT		6500K				750 lm			



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-MLB-291-12w-S-W.WHT	80 / 90	3000K	Length	Width	Height	1320 lm	48VDC	Housing	Aluminium
SL-MLB-291-12w-S-N.WHT		4000K	203	25	22	1440 lm		LED Make	Bridgelux
SL-MLB-291-12w-S-WHT		6500K				1500 lm			



MAGNETIC LASER SPOT LIGHT


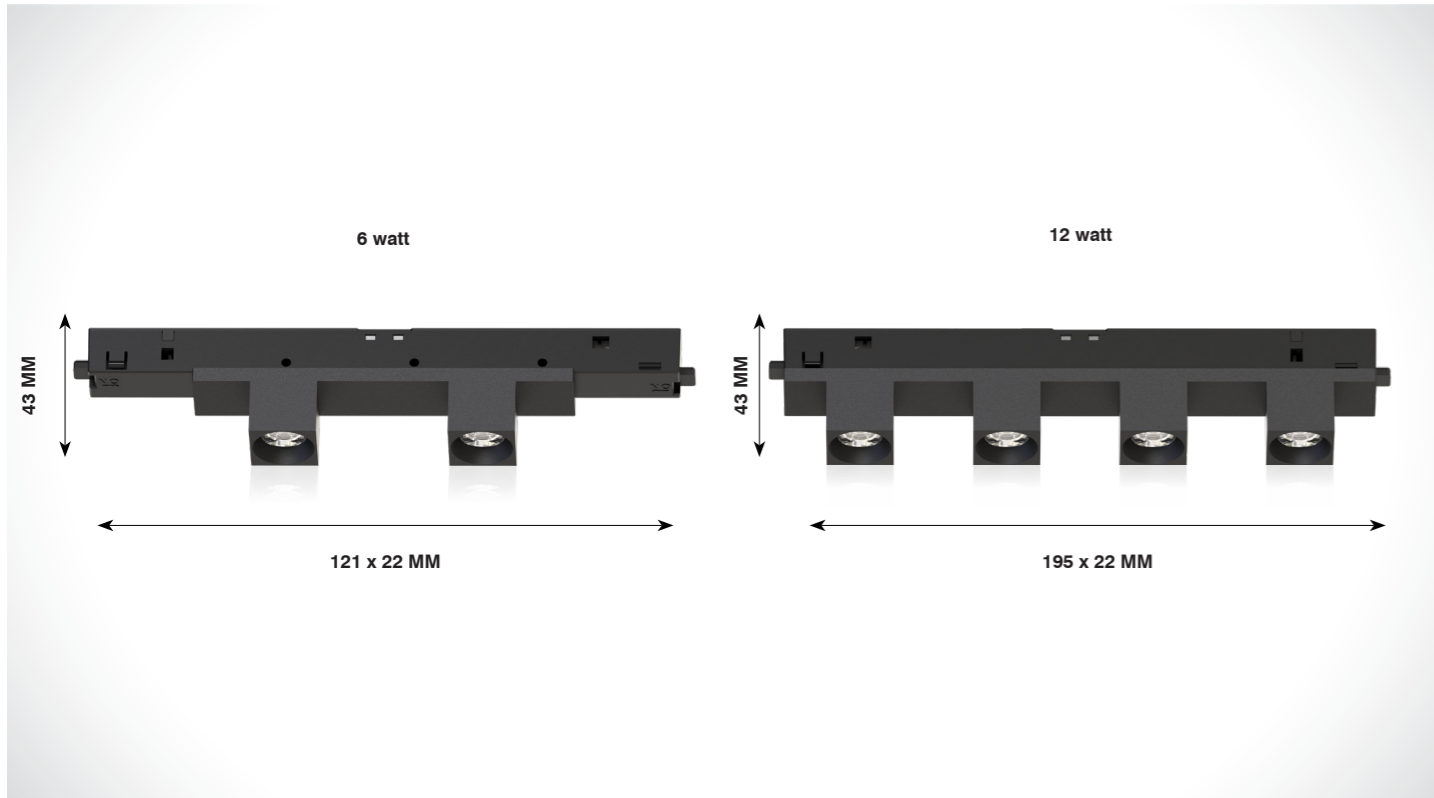


Available Body Colour : Black Body

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-MTL-322-6w-R-W.WHT	80 / 90	3000K	Lenght	Width	Height	660 lm	48V DC	Housing	Aluminium
SL-MTL-322-6w-R-N.WHT		4000K	121	22	43	720 lm		LED Make	Cree / Osram
SL-MTL-322-6w-R-WHT		6500K				750 lm		Driver Brands	Meanwell / KG
								Dimming	0-10v / Dali
SL-MTL-323-12w-R-W.WHT	80 / 90	3000K	Lenght	Width	Height	1320 lm	48V DC	Housing	Aluminium
SL-MTL-323-12w-R-N.WHT		4000K	195	22	43	1440 lm		LED Make	Cree / Osram
SSL-MTL-323-12w-R-WHT		6500K				1500 lm		Driver Brands	Meanwell / KG
								Dimming	0-10v / Dali




Beam Angle



Application



MAGNETIC DIFFUSER LASER BLADE

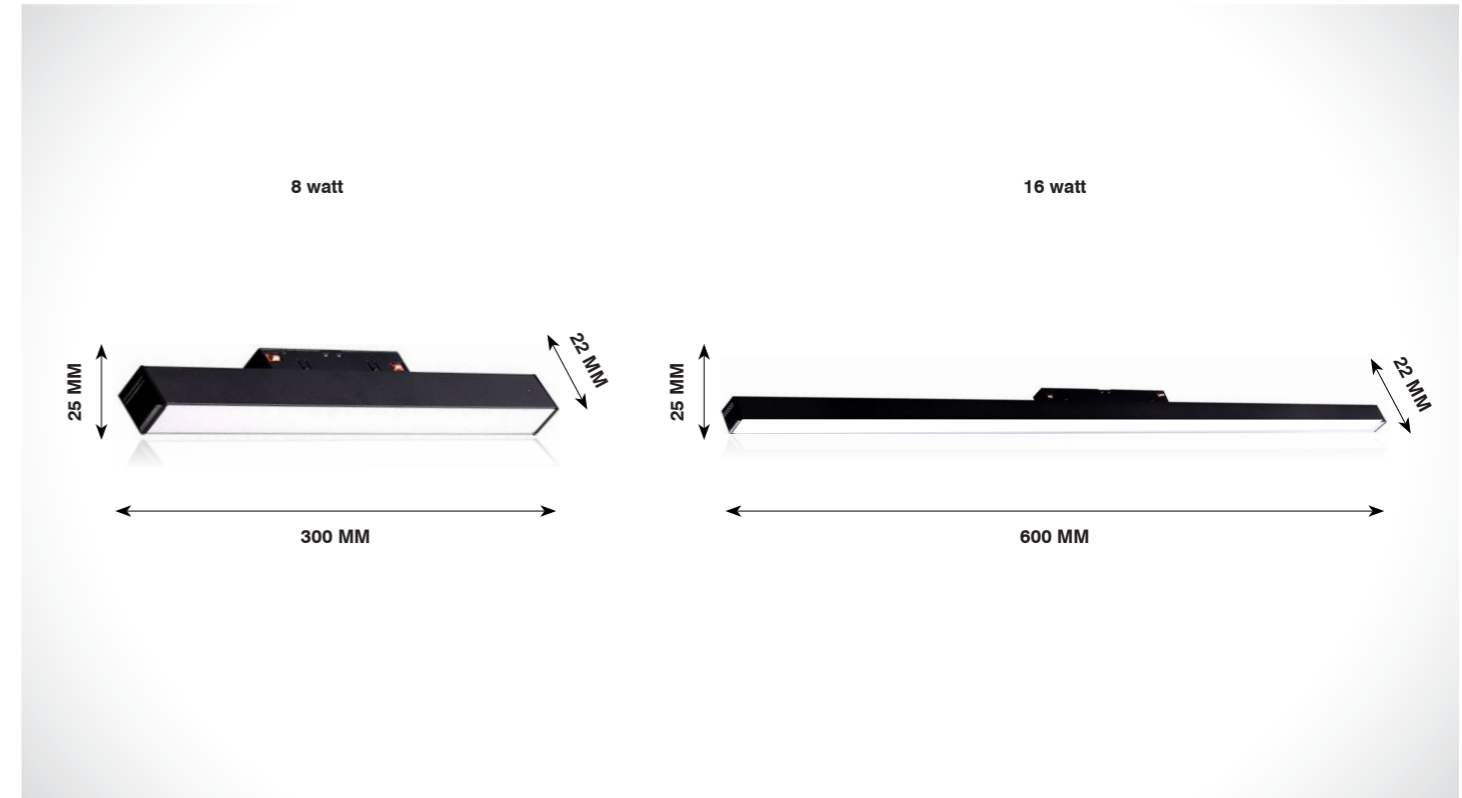

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-MDLB-292-8w-S-W.WHT	80 / 90	3000K	Length	Width	Height	880 lm	48VDC	Housing	Aluminium
SL-MDLB-292-8w-S-N.WHT		4000K	300	25	22	960 lm		LED Make	Bridgelux
SL-MDLB-292-8w-S-WHT		6500K				1000 lm			
SL-MDLB-292-16w-S-W.WHT	80 / 90	3000K	Length	Width	Height	1760 lm	48VDC	Housing	Aluminium
SL-MDLB-292-16w-S-N.WHT		4000K	600	25	22	1920 lm		LED Make	Bridgelux
SL-MDLB-292-16w-S-WHT		6500K				2000 lm			


Beam Angle



Application






MAGNETIC TRACK SPOT

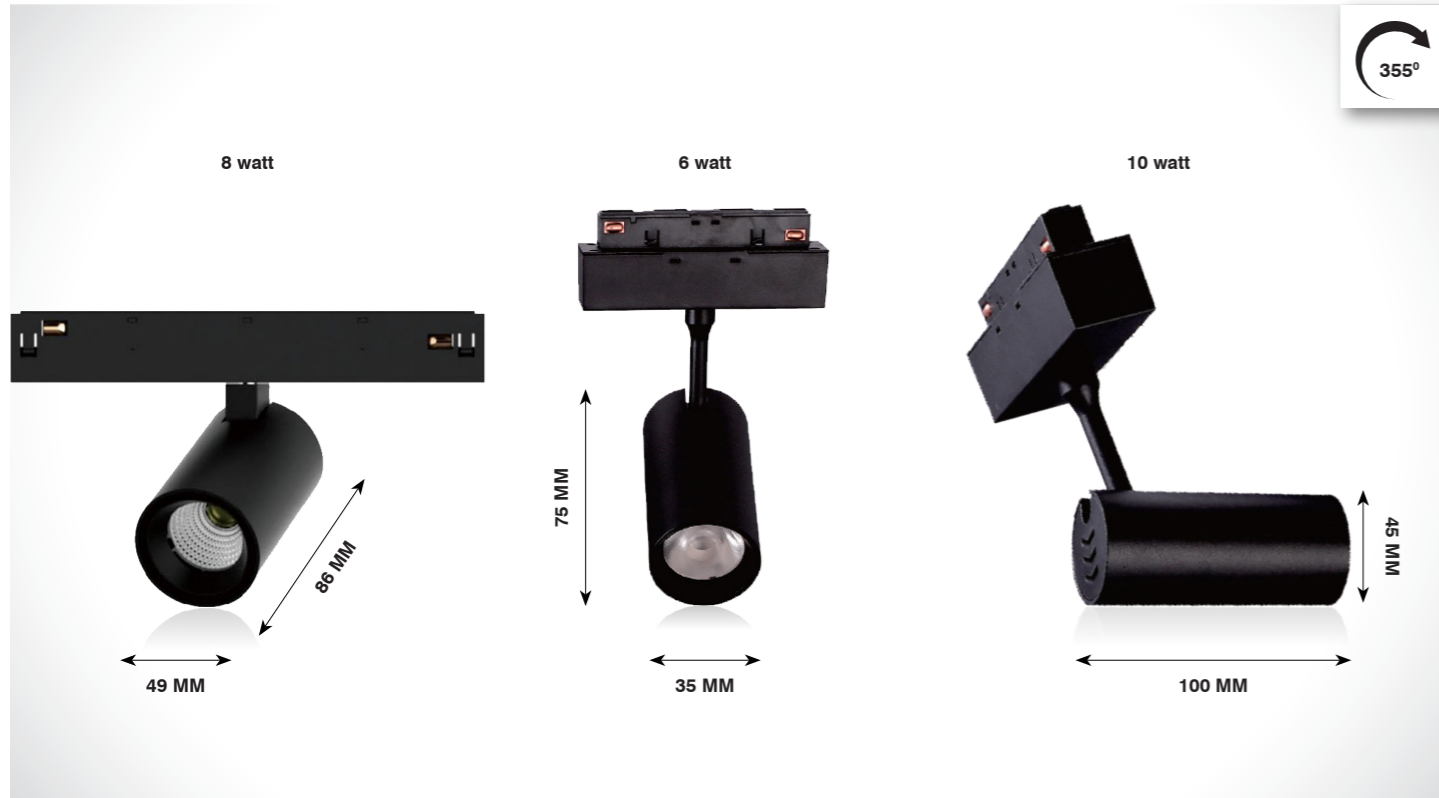

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-MTL-290-8w-R-W.WHT	80 / 90	3000K	Length	Diameter	880 lm	48VDC	Housing	Aluminium
SL-MTL-290-8w-R-N.WHT		4000K	86	49	960 lm		LED Make	Cree / Bridgelux
SL-MTL-290-8w-R-WHT		6500K			1000 lm			

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-MTL-293-6w-R-W.WHT	80 / 90	3000K	Length	Diameter	660 lm	48VDC	Housing	Aluminium
SL-MTL-293-6w-R-N.WHT		4000K	75	35	720 lm		LED Make	Cree / Bridgelux
SL-MTL-293-6w-R-WHT		6500K			750 lm			


Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-MTL-293-10w-R-W.WHT	80 / 90	3000K	Length	Diameter	1100 lm	48VDC	Housing	Aluminium
SL-MTL-293-10w-R-N.WHT		4000K	100	45	1200 lm		LED Make	Cree / Bridgelux
SL-MTL-293-10w-R-WHT		6500K			1250 lm			



Application



MAGNETIC TRACK SPOT LIGHT

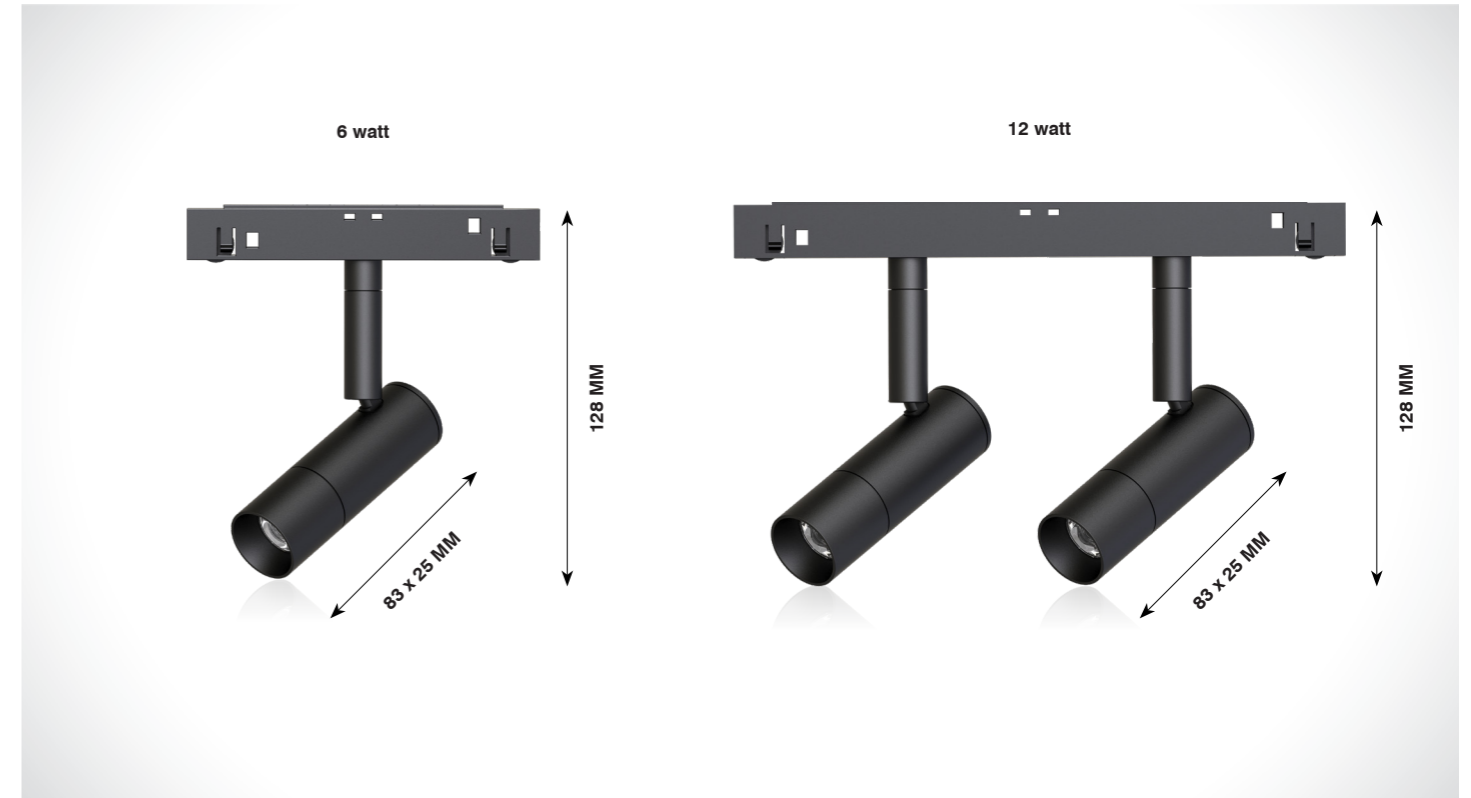


Available Body Colour : Black Body
Body Shape : Slim

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-MTL-324-6w-R-W.WHT	80 / 90	3000K	Diameter	Height	660 lm	48V DC	Housing	Aluminium
SL-MTL-324-6w-R-N.WHT		4000K	83 x 25	128	720 lm		LED Make	Cree / Osram
SL-MTL-324-6w-R-WHT		6500K			750 lm		Driver Brands	Meanwell
							Dimming	Triac / 0-10v / Dali

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-MTL-325-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	1320 lm	48V DC	Housing	Aluminium
SL-MTL-325-12w-R-N.WHT		4000K	83 x 25	128	1440 lm		LED Make	Cree / Osram
SL-MTL-325-12w-R-WHT		6500K			1500 lm		Driver Brands	Meanwell
							Dimming	Triac / 0-10v / Dali


DIMMABLE



Application




MAGNETIC TRACK PATTI

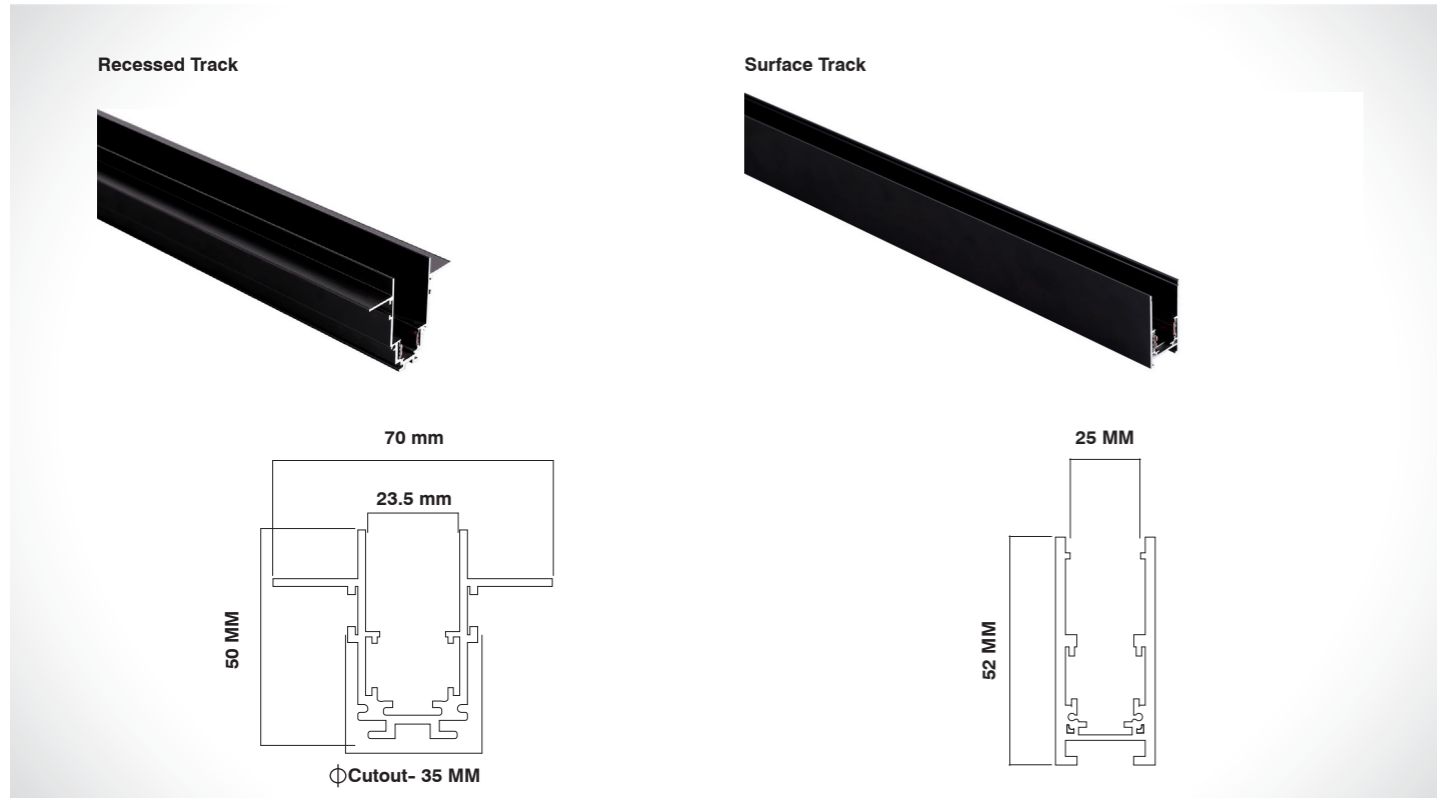

Product Code	Dimension (in mm)			
	Length	Width	Height	Cutout
SL-MTP-296-Recessed - 1 mtr	1000	70	50	φ 35
SL-MTP-296-Recessed - 2 mtr	2000	70	50	φ 35
SL-SMTP-297-Surface - 1 mtr	1000	25	52	
SL-SMTP-297-Surface - 2 mtr	2000	25	52	

MAGNETIC TRACK ACCESSORIES

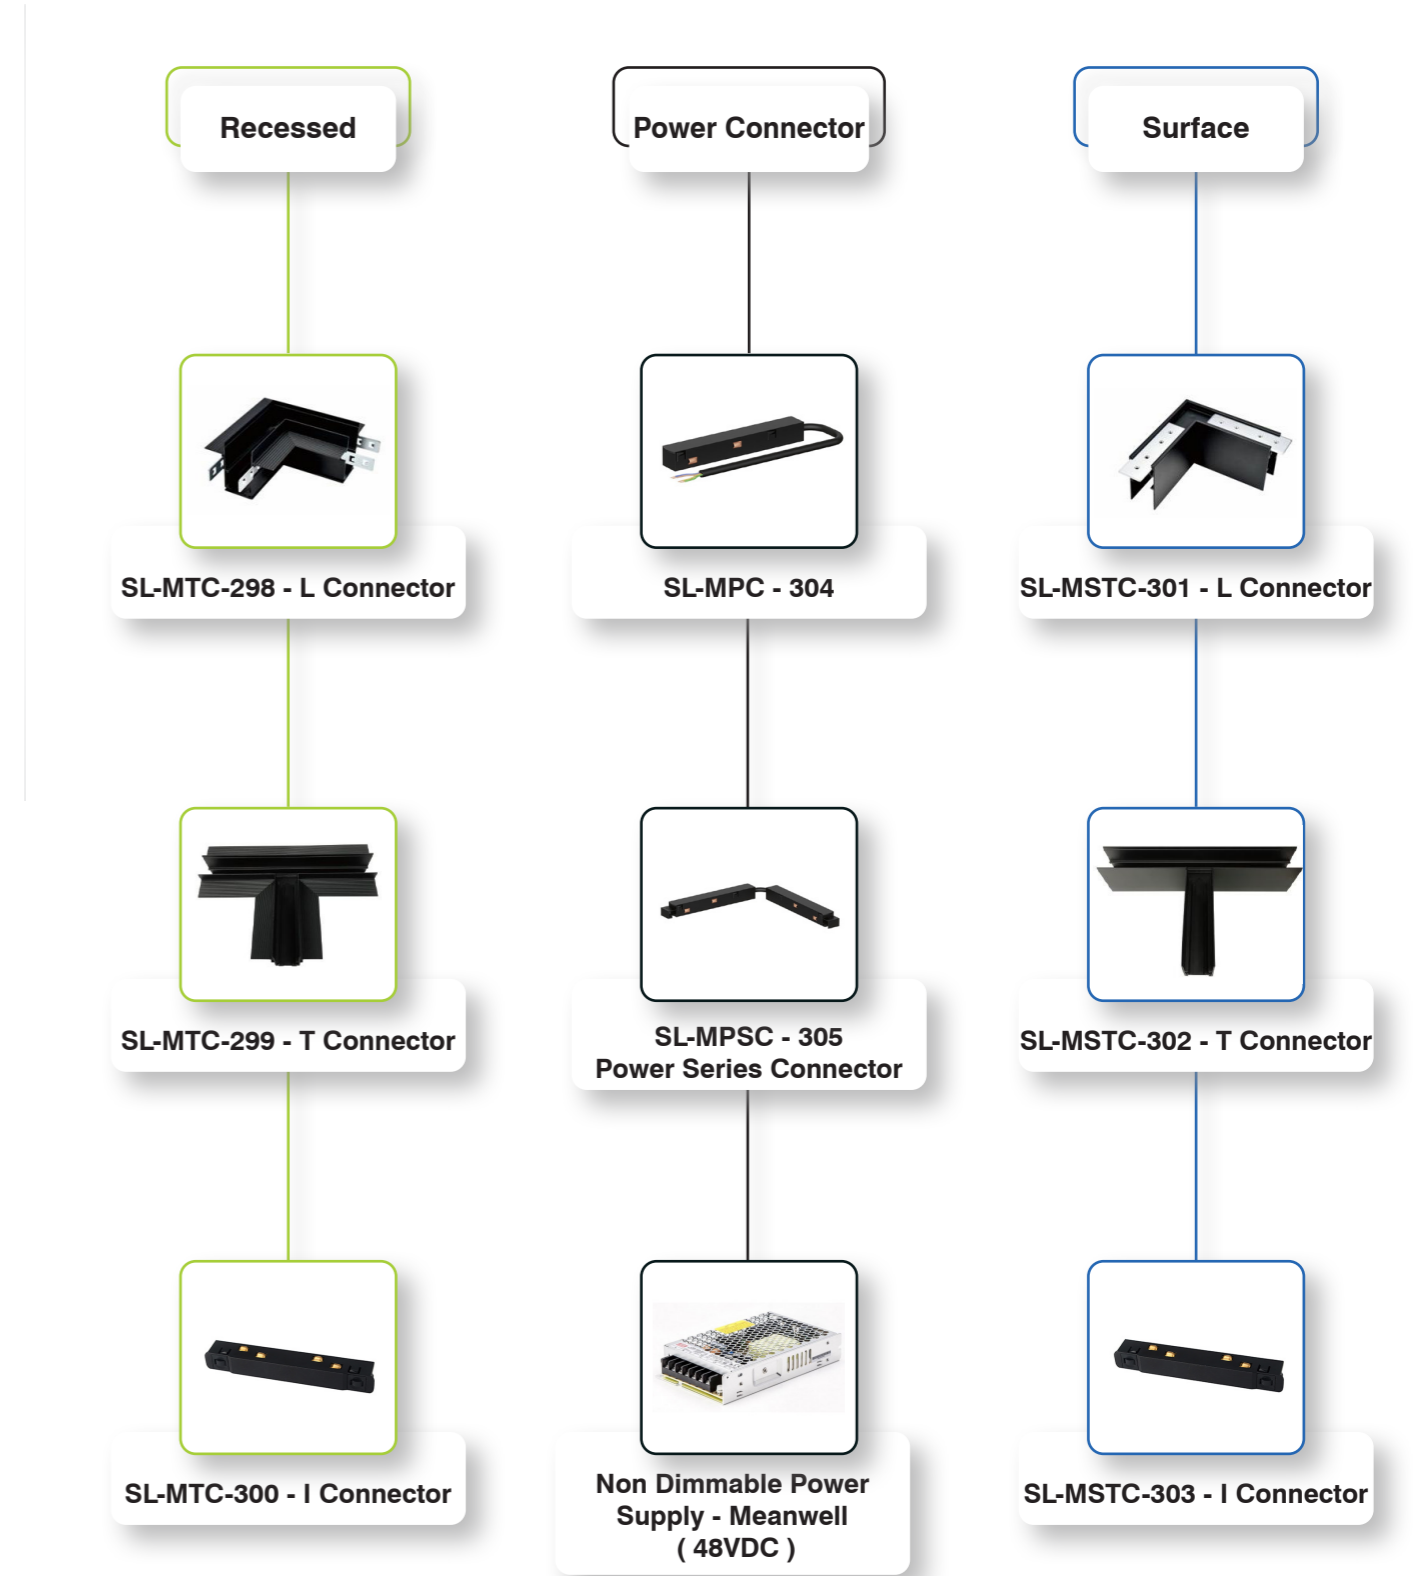

DOWN LIGHT



Available Body Finish : Graphite Black / White / Rose Gold




DOWN LIGHT SERIES

CELER




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-229-7w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	770 lm	36-42V@150mA	Housing	Aluminium
SL-DL-229-7w-R-N.WHT		4000K	39	59	φ 33	840 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-229-7w-R-WHT		6500K				875 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-230-14w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1540 lm	36-42V@300mA	Housing	Aluminium
SL-DL-230-14w-R-N.WHT		4000K	58	70	φ 52	1680 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-230-14w-R-WHT		6500K				1750 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-231-18w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1980 lm	36-42V@400mA	Housing	Aluminium
SL-DL-231-18w-R-N.WHT		4000K	75	85	φ 65	2160 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-231-18w-R-WHT		6500K				2250 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali

Beam Angle



On request also available in CCT - 2700K / 3500K / 5000K


DOWN LIGHT

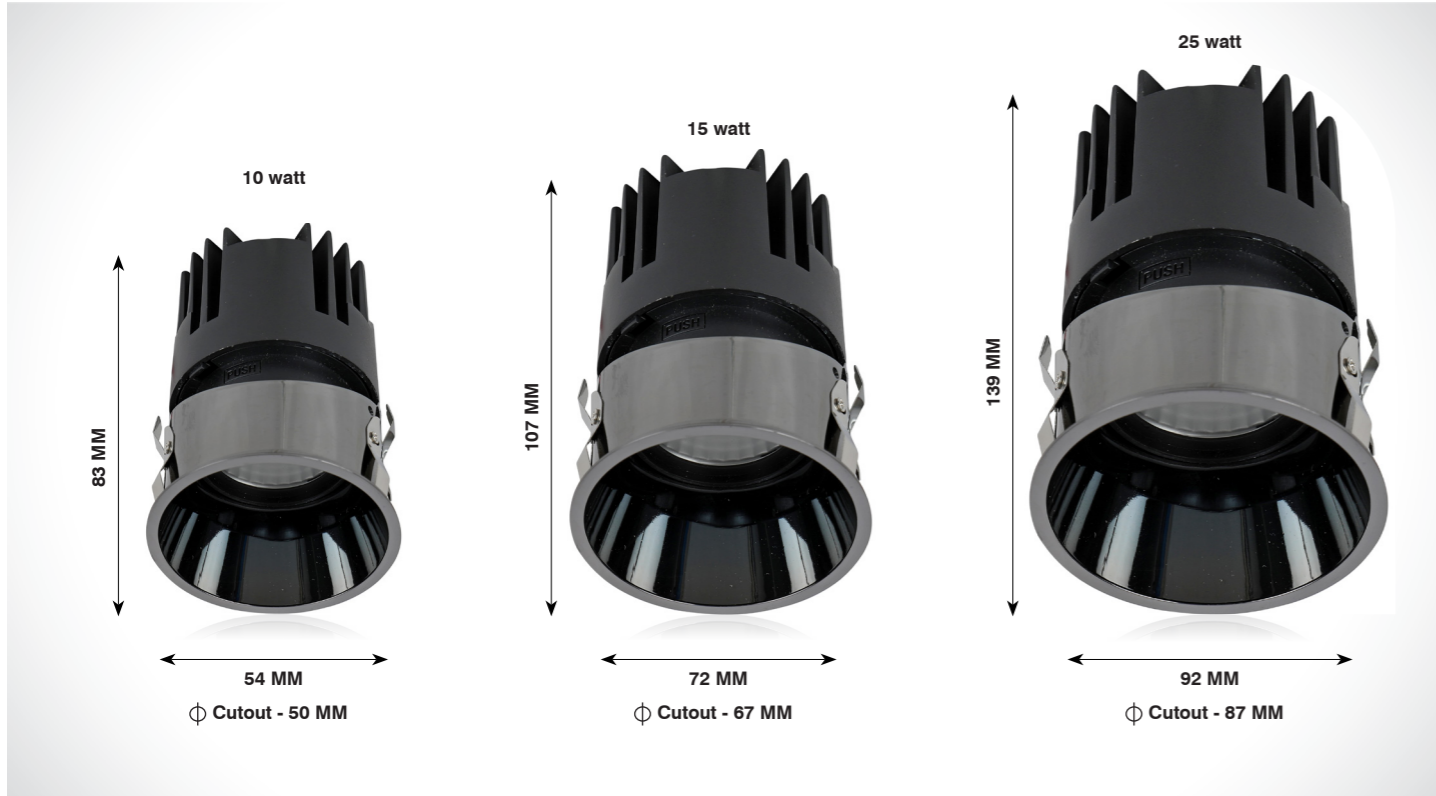

STELLA




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-257-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@200mA	Housing	Aluminium
SL-DL-257-10w-R-N.WHT		4000K	54	83	φ 50	1200 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-257-10w-R-WHT		6500K				1250 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-257-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	Housing	Aluminium
SL-DL-257-15w-R-N.WHT		4000K	72	107	φ 67	1800 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-257-15w-R-WHT		6500K				1875 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-257-25w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	2750 lm	36-42V@700 mA	Housing	Aluminium
SL-DL-257-25w-R-N.WHT		4000K	92	139	φ 87	3000 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-257-25w-R-WHT		6500K				3125 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali

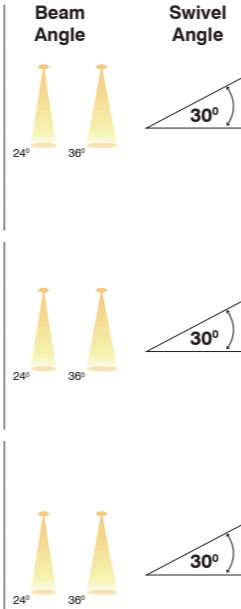

On request also available in CCT - 2700K / 3500K / 5000K



DOWN LIGHT

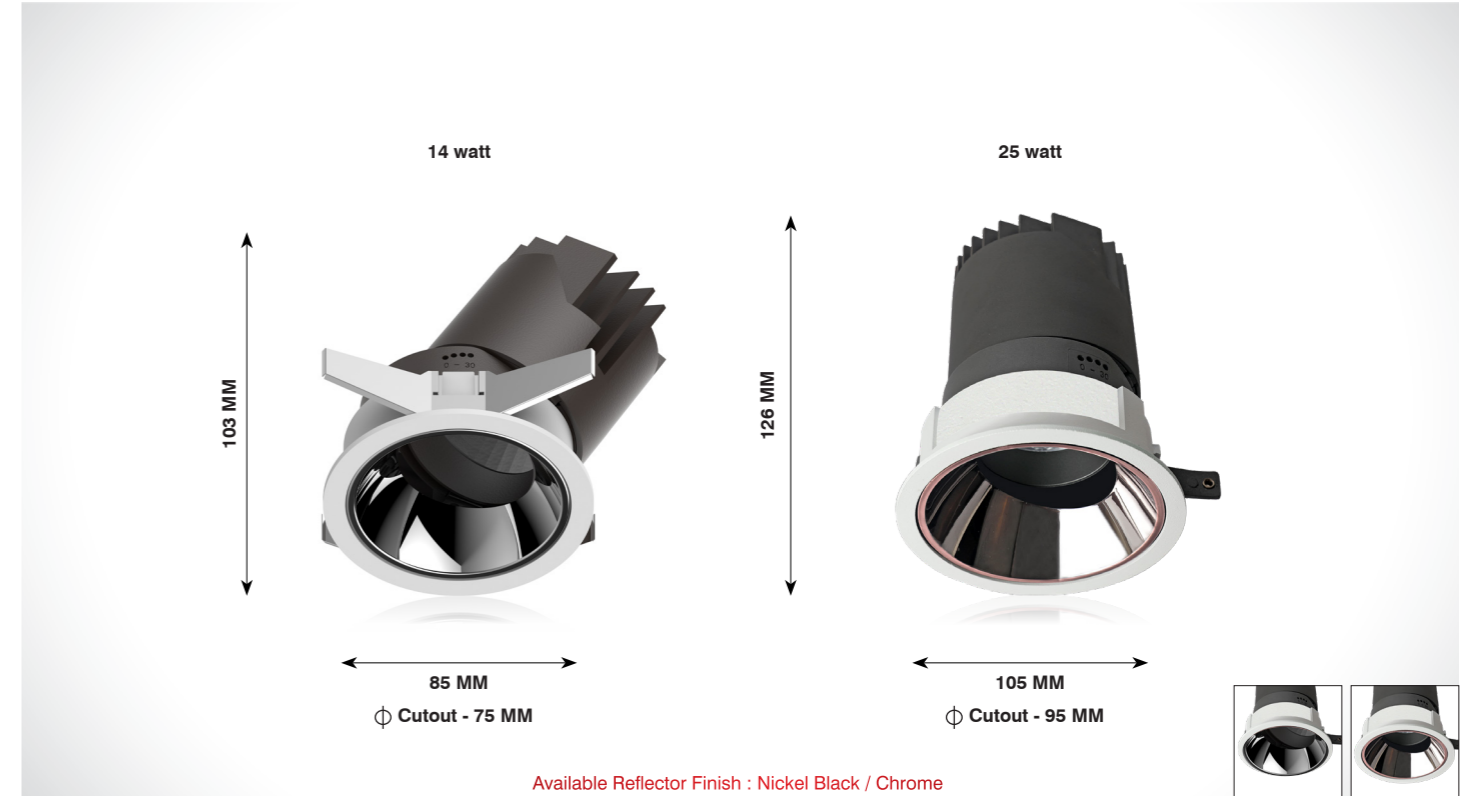


Available Reflector Finish : Nickel Black / Chrome

ANOSH




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-232-14w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1540 lm	36-42V@300 mA	Housing	Aluminium
SL-DL-232-14w-R-N.WHT		4000K	85	103	φ 75	1680 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-232-14w-R-WHT		6500K				1750 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-232-25w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	2750 lm	36-42V@700 mA	Housing	Aluminium
SL-DL-232-25w-R-N.WHT		4000K	105	126	φ 95	3000 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-232-25w-R-WHT		6500K				3125 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali

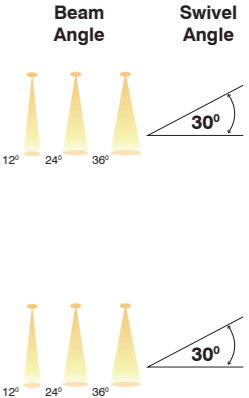

On request also available in CCT - 2700K / 3500K / 5000K



DOWN LIGHT

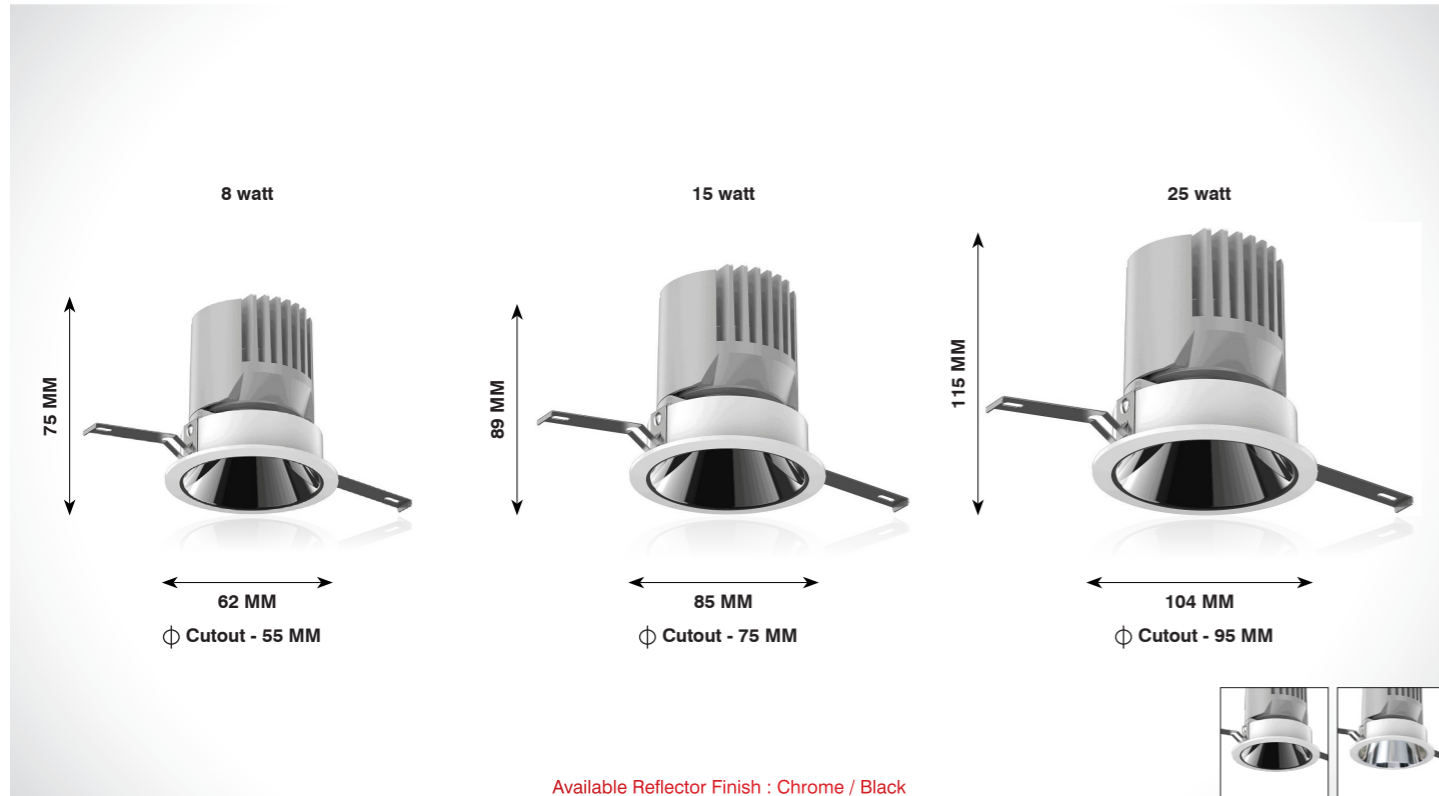


Available Reflector Finish : Chrome / Black

LAZIO




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-310-8w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	880 lm	36-42V@200mA	Housing	Aluminium
SL-DL-310-8w-R-N.WHT		4000K	62	75	φ 55	960 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-310-8w-R-WHT		6500K				1000 lm		Driver Brands	Fulham / Philips / Osram
								Dimming	Triac / 0-10v / Dali
SL-DL-310-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	Housing	Aluminium
SL-DL-310-15w-R-N.WHT		4000K	85	89	φ 75	1800 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-310-15w-R-WHT		6500K				1875 lm		Driver Brands	Fulham / Philips / Osram
								Dimming	Triac / 0-10v / Dali
SL-DL-310-25w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	2750 lm	36-42V@700 mA	Housing	Aluminium
SL-DL-310-25w-R-N.WHT		4000K	104	115	φ 95	3000 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-310-25w-R-WHT		6500K				3125 lm		Driver Brands	Fulham / Philips / Osram
								Dimming	Triac / 0-10v / Dali

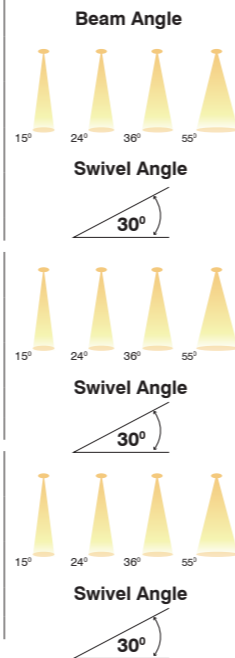

On request also available in CCT - 2700K / 3500K / 5000K



DOWN LIGHT

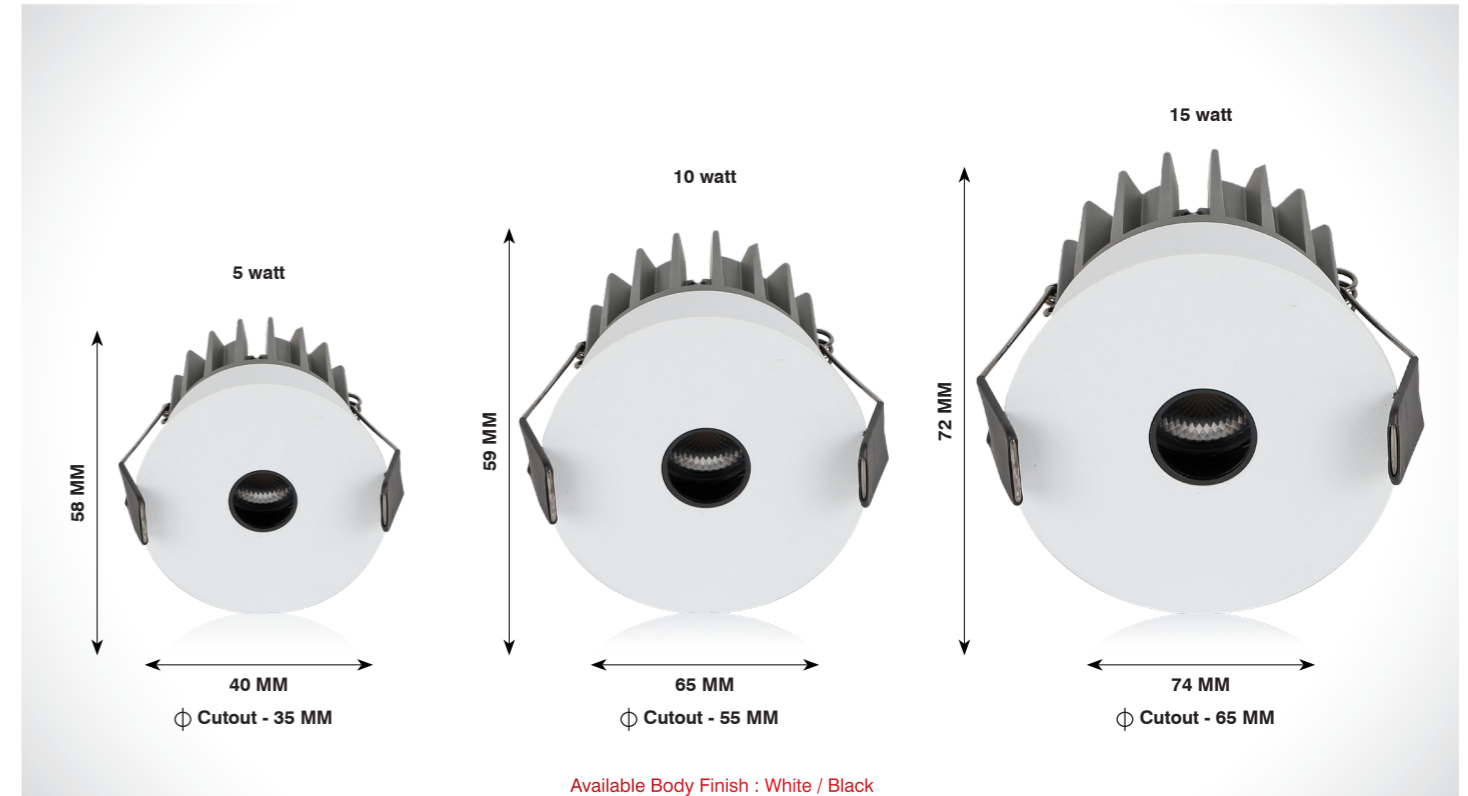

Available Body Finish : White / Black

OLIVER




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-261-5w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	550 lm	2-4V@1000mA	Housing	Aluminium
SL-DL-261-5w-R-N.WHT		4000K	40	58	φ 35	600 lm		LED Make	Bridgelux
SL-DL-261-5w-R-WHT		6500K				625 lm		Driver Brands	Srishti
								Dimming	Triac / 0-10v / Dali
SL-DL-261-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@200mA	Housing	Aluminium
SL-DL-261-10w-R-N.WHT		4000K	65	59	φ 55	1200 lm		LED Make	Bridgelux
SL-DL-261-10w-R-WHT		6500K				1250 lm		Driver Brands	Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-261-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	Housing	Aluminium
SL-DL-261-15w-R-N.WHT		4000K	74	72	φ 65	1800 lm		LED Make	Bridgelux
SL-DL-261-15w-R-WHT		6500K				1875 lm		Driver Brands	Fulham
								Dimming	Triac / 0-10v / Dali



On request also available in CCT - 2700K / 3500K / 5000K



DOWN LIGHT

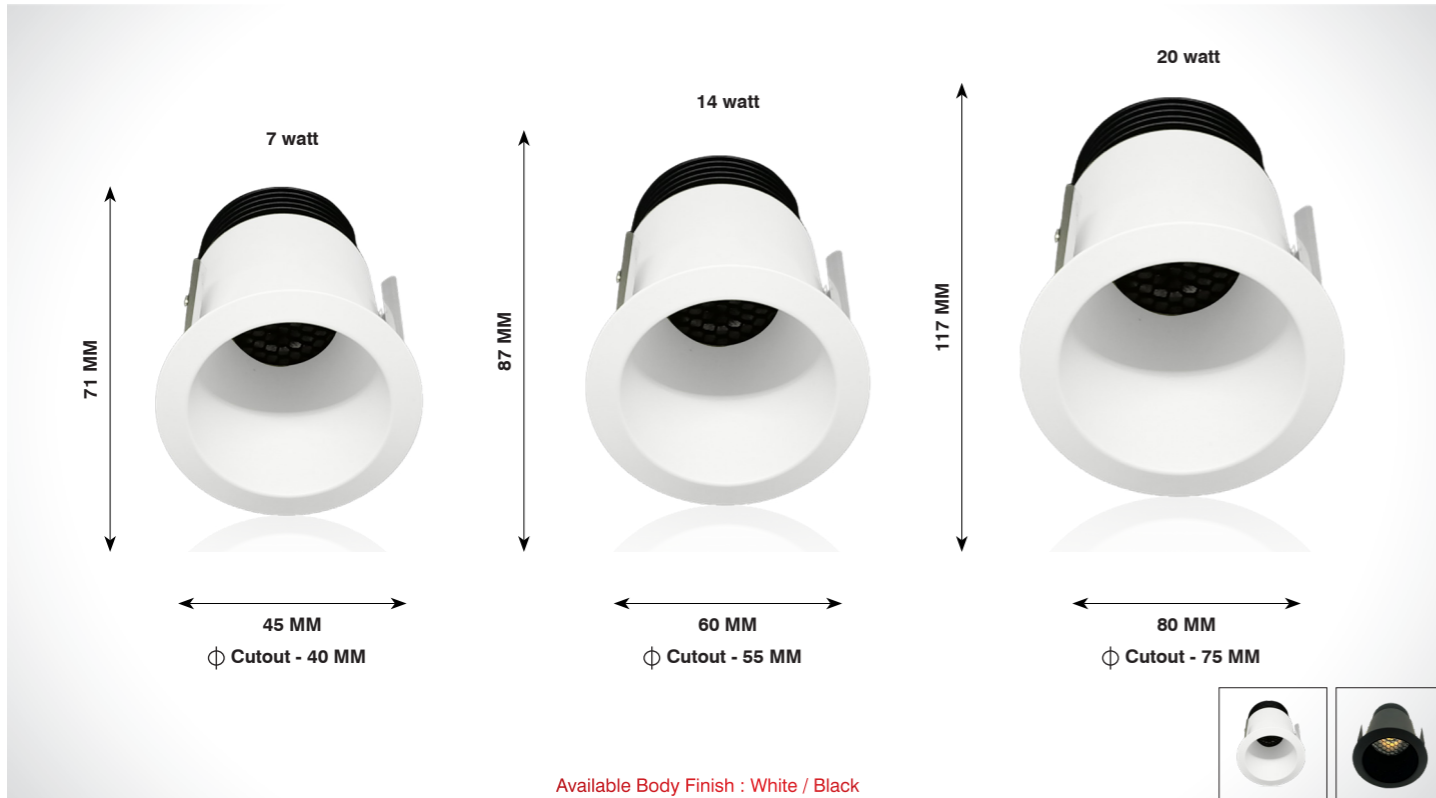




Available Body Finish : White / Black

BAKU

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-279-7w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	770 lm	36-42V@150mA	Housing	Aluminium
SL-DL-279-7w-R-N.WHT		4000K	45	71	φ40	840 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-279-7w-R-WHT		6500K				875 lm		Driver Brands	Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-280-14w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1540 lm	36-42V@300 mA	Housing	Aluminium
SL-DL-280-14w-R-N.WHT		4000K	60	87	φ55	1680 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-280-14w-R-WHT		6500K				1750 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-281-20w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	2200 lm	36-42V@500mA	Housing	Aluminium
SL-DL-281-20w-R-N.WHT		4000K	80	117	φ75	2400 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-281-20w-R-WHT		6500K				2500 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali



Beam Angle




Application



On request also available in CCT - 2700K / 3500K / 5000K

DOWN LIGHT


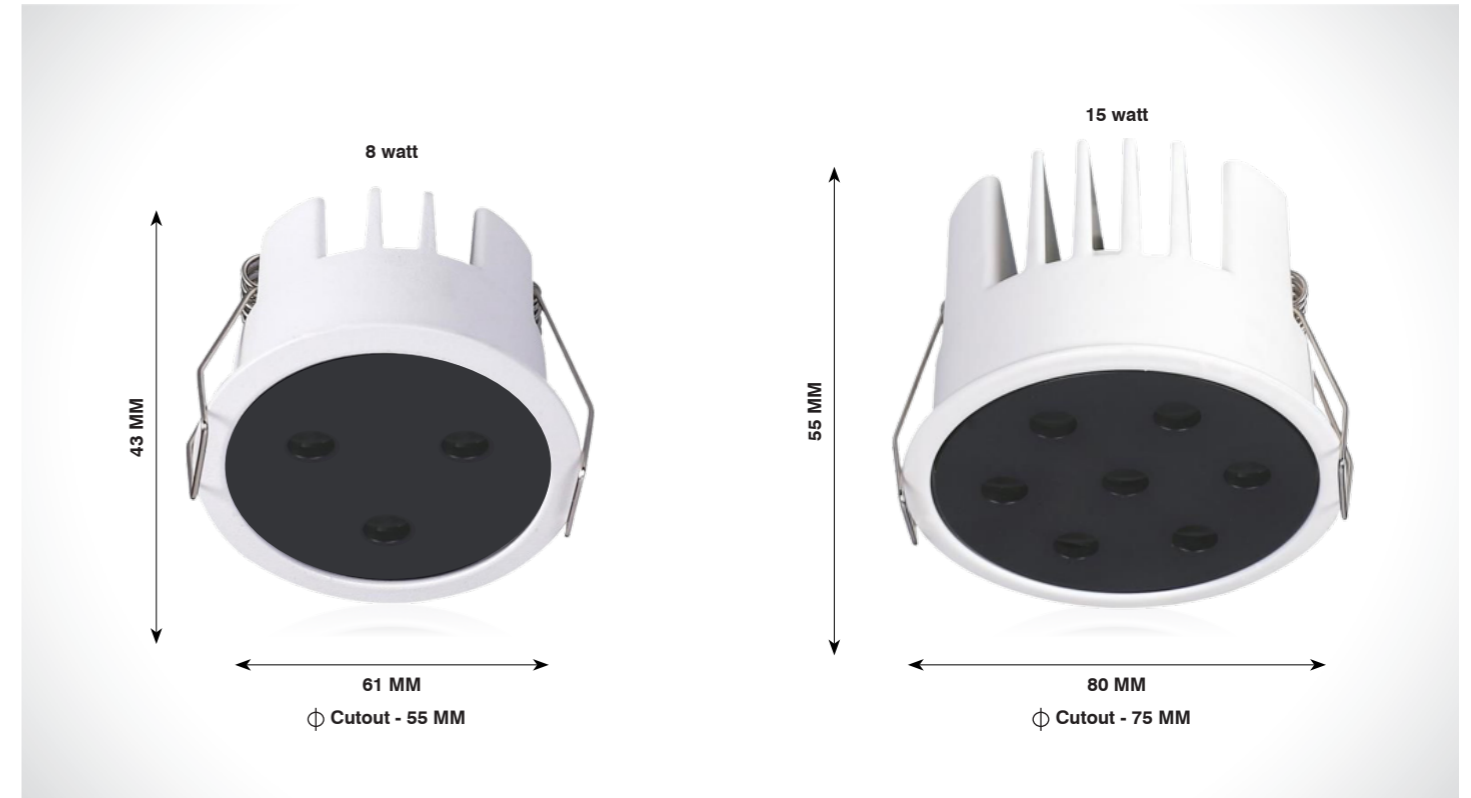


RAHI

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-287-8w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	880 lm	7-12V@700mA	Housing	Aluminium
SL-DL-287-8w-R-N.WHT		4000K	61	43	φ55	960 lm		LED Make	Osram
SL-DL-287-8w-R-WHT		6500K				1000 lm		Driver Brands	Fulham
								Dimming	Triac / 0-10v / Dali
SL-DL-287-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	11-22V@700mA	Housing	Aluminium
SL-DL-287-15w-R-N.WHT		4000K	80	55	φ75	1800 lm		LED Make	Osram
SL-DL-287-15w-R-WHT		6500K				1875 lm		Driver Brands	Osram
								Dimming	Triac / 0-10v / Dali

DIMMABLE

Beam Angle



Application



On request also available in CCT - 2700K / 3500K / 5000K

DOWN LIGHT



ENRICO

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-197-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350 mA	Housing	Aluminium
SL-DL-197-15w-R-N.WHT		4000K	84	91	φ75	1800 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-197-15w-R-WHT		6500K				1875 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-197-25w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	2750 lm	36-42V@700mA	Housing	Aluminium
SL-DL-197-25w-R-N.WHT		4000K	104	104	φ95	3000 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-197-25w-R-WHT		6500K				3125 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-197-30w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	3300 lm	36-42V@750mA	Housing	Aluminium
SL-DL-197-30w-R-N.WHT		4000K	104	104	φ95	3600 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-197-30w-R-WHT		6500K				3750 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-197-35w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	3850 lm	36-42V@850mA	Housing	Aluminium
SL-DL-197-35w-R-N.WHT		4000K	114	104	φ105	4200 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-197-35w-R-WHT		6500K				4375 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali

On request also available in CCT - 2700K / 3500K / 5000K

DOWN LIGHT




RUBEN

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-267-30w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	3300 lm	36-42V@750mA	Housing	Aluminium
SL-DL-267-30w-R-N.WHT		4000K	115	88	φ98	3600 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-267-30w-R-WHT		6500K				3750 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali

On request also available in CCT - 2700K / 3500K / 5000K

DOWN LIGHT

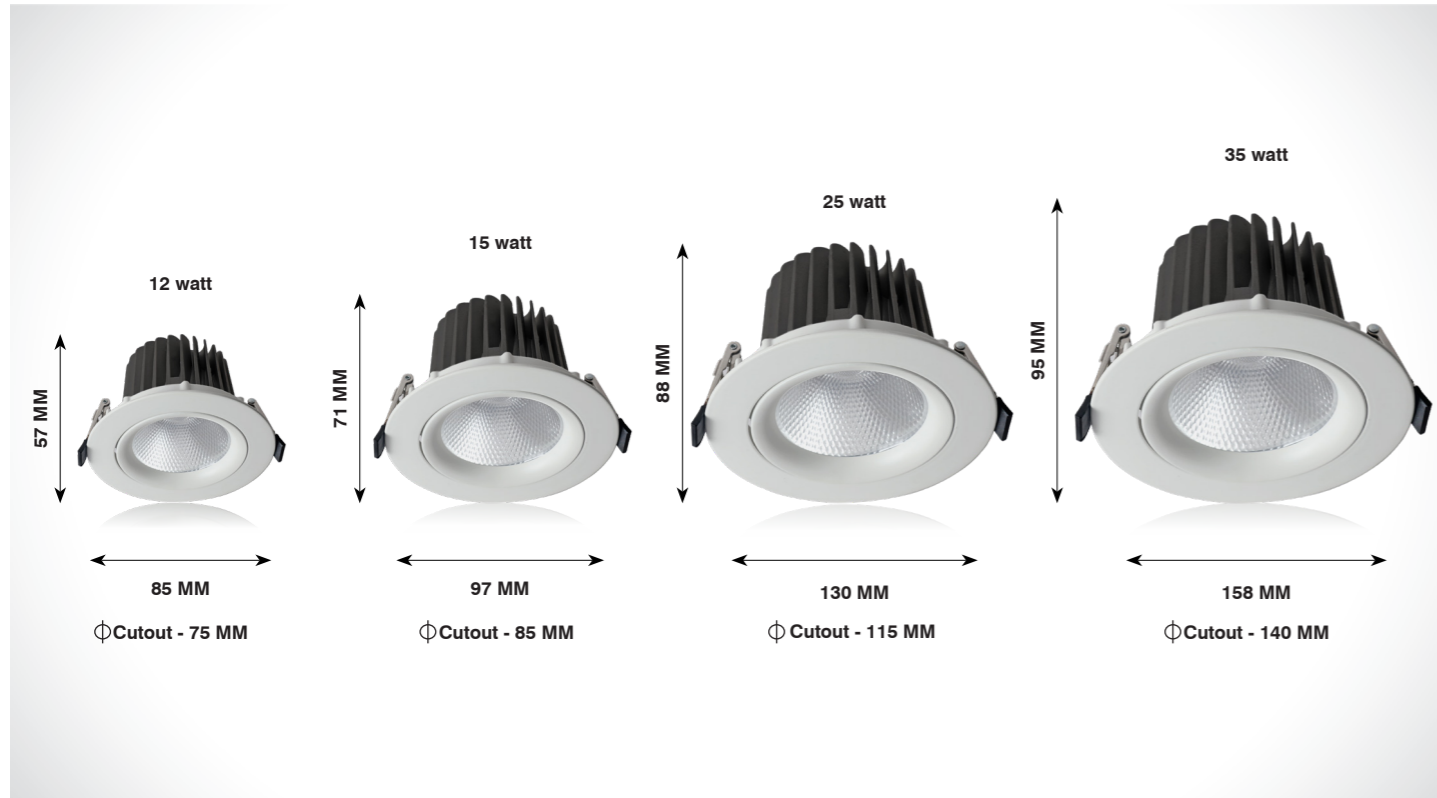

THEA

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	LED Make
SL-DL-207-12w-R-W.WHT	80 / 90	3000K	85	57	φ75	1320 lm	36-42V@300mA	Aluminium	
SL-DL-207-12w-R-N.WHT		4000K	85	57	φ75	1440 lm		Citizen / Cree / Bridgelux	
SL-DL-207-12w-R-WHT		6500K				1500 lm		Fulham / Philips	
								Triac / 0-10v / Dali	
SL-DL-207-15w-R-W.WHT	80 / 90	3000K	97	71	φ85	1650 lm	36-42V@350mA	Aluminium	
SL-DL-207-15w-R-N.WHT		4000K	97	71	φ85	1800 lm		Citizen / Cree / Bridgelux	
SL-DL-207-15w-R-WHT		6500K				1875 lm		Fulham / Philips	
								Triac / 0-10v / Dali	
SL-DL-207-25w-R-W.WHT	80 / 90	3000K	130	88	φ115	2750 lm	36-42V@700 mA	Aluminium	
SL-DL-207-25w-R-N.WHT		4000K	130	88	φ115	3000 lm		Citizen / Cree / Bridgelux	
SL-DL-207-25w-R-WHT		6500K				3125 lm		Fulham / Philips	
								Triac / 0-10v / Dali	
SL-DL-207-35w-R-W.WHT	80 / 90	3000K	158	95	φ140	3850 lm	36-42V@850 mA	Aluminium	
SL-DL-207-35w-R-N.WHT		4000K	158	95	φ140	4200 lm		Citizen / Cree / Bridgelux	
SL-DL-207-35w-R-WHT		6500K				4375 lm		Fulham / Philips	
								Triac / 0-10v / Dali	




Application



On request also available in CCT - 2700K / 3500K / 5000K

DOWN LIGHT

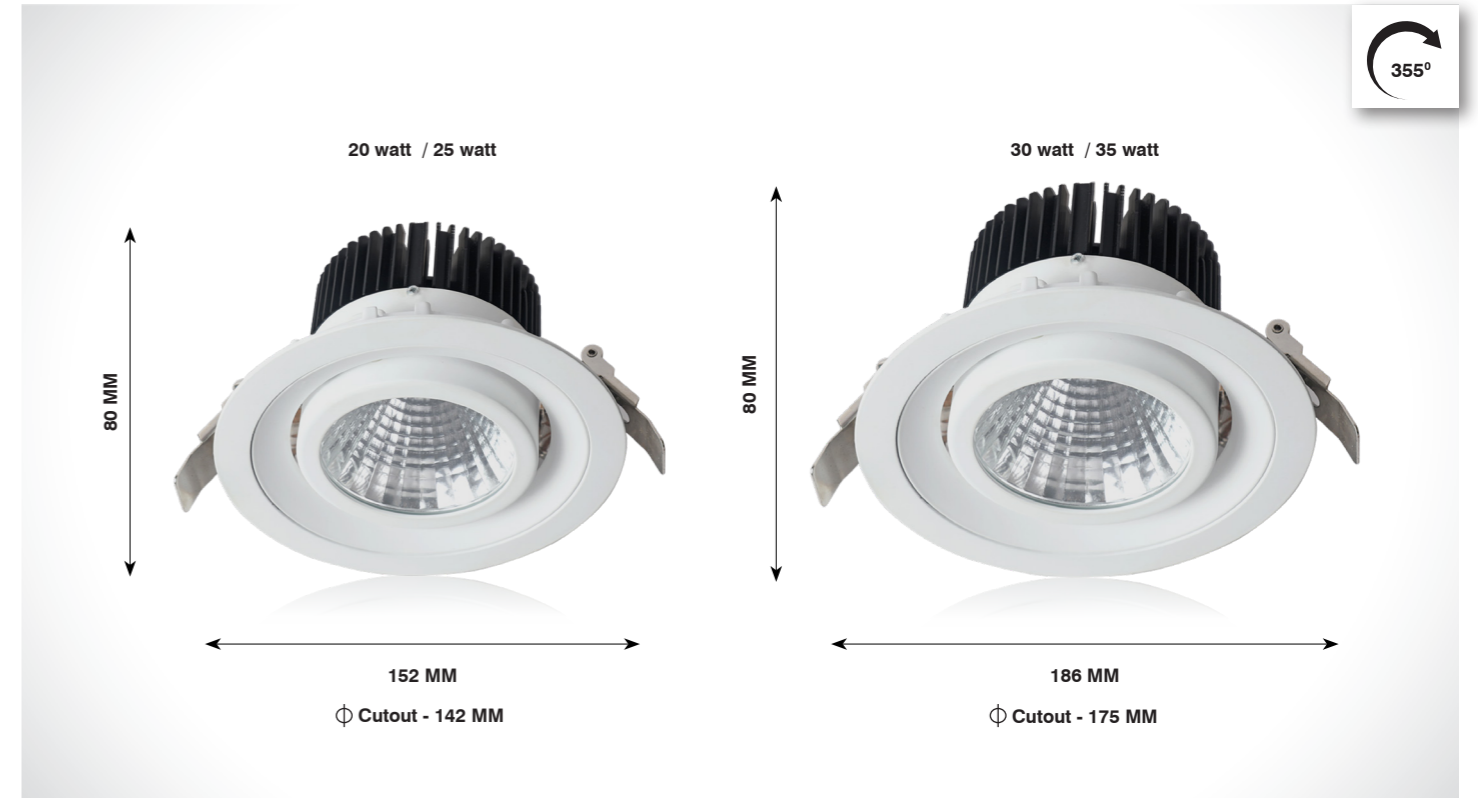

ZORION

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	LED Make
SL-DL-85-20w-R-W.WHT	80 / 90	3000K	152	80	φ142	2200 lm	36-42V@500 mA	Aluminium	
SL-DL-85-20w-R-N.WHT		4000K	152	80	φ142	2400 lm		Citizen / Cree / Bridgelux	
SL-DL-85-20w-R-WHT		6500K				2500 lm		Fulham	
								Triac / 0-10v / Dali	
SL-DL-85-25w-R-W.WHT	80 / 90	3000K	152	80	φ142	2750 lm	36-42V@700mA	Aluminium	
SL-DL-85-25w-R-N.WHT		4000K	152	80	φ142	3000 lm		Citizen / Cree / Bridgelux	
SL-DL-85-25w-R-WHT		6500K				3125 lm		Fulham	
								Triac / 0-10v / Dali	
SL-DL-85-30w-R-W.WHT	80 / 90	3000K	186	80	φ175	3300 lm	36-42V@750mA	Aluminium	
SL-DL-85-30w-R-N.WHT		4000K	186	80	φ175	3600 lm		Citizen / Cree / Bridgelux	
SL-DL-85-30w-R-WHT		6500K				3750 lm		Fulham	
								Triac / 0-10v / Dali	
SL-DL-85-35w-R-W.WHT	80 / 90	3000K	186	80	φ175	3850 lm	36-42V@850mA	Aluminium	
SL-DL-85-35w-R-N.WHT		4000K	186	80	φ175	4200 lm		Citizen / Cree / Bridgelux	
SL-DL-85-35w-R-WHT		6500K				4375 lm		Fulham	
								Triac / 0-10v / Dali	




Application



On request also available in CCT - 2700K / 3500K / 5000K

DOWN LIGHT

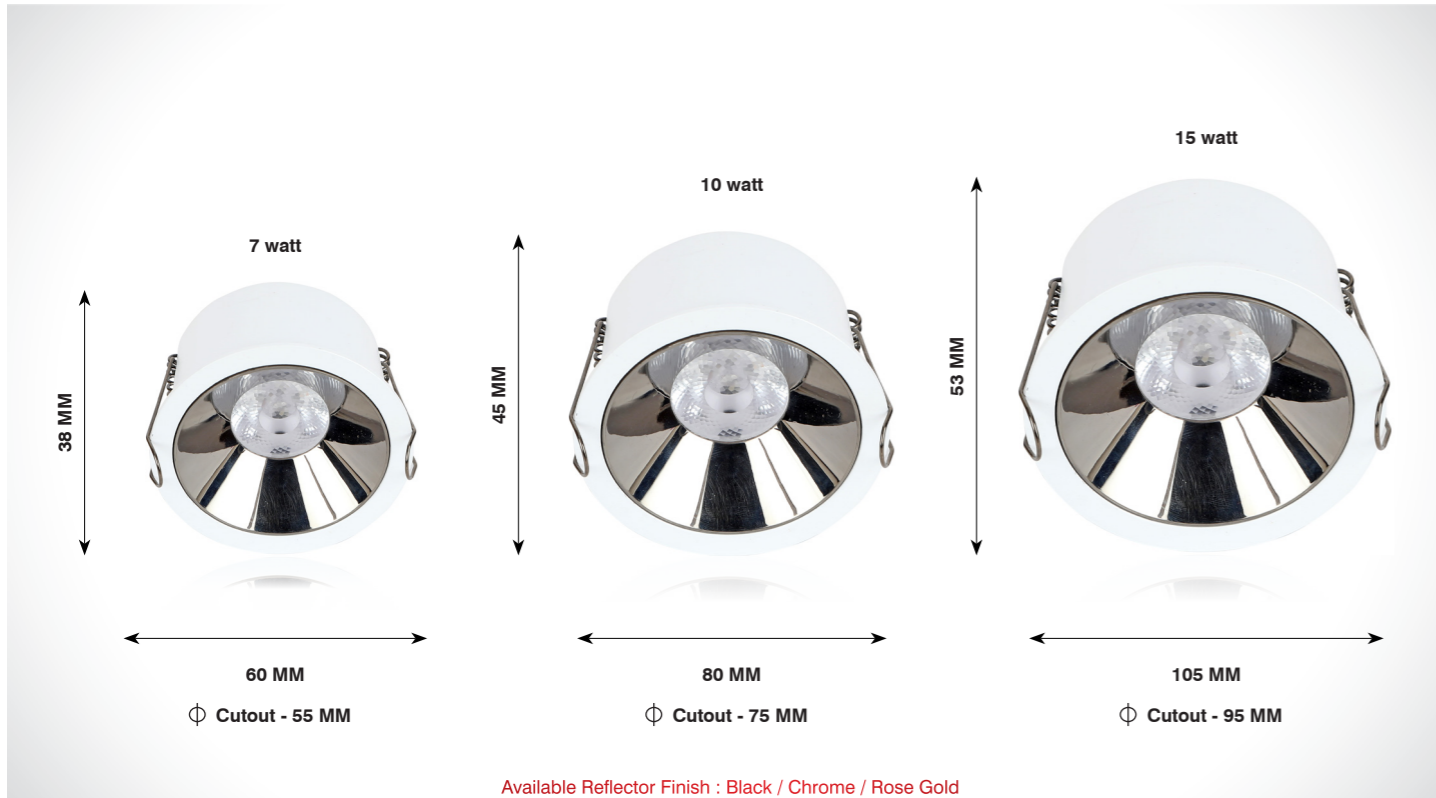




Available Reflector Finish : Black / Chrome / Rose Gold

VERDA

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-260-7w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	770 lm	36-42V@150mA	Housing	Aluminium
SL-DL-260-7w-R-N.WHT		4000K	60	38	φ 55	840 lm		LED Make	Cree
SL-DL-260-7w-R-WHT		6500K				875 lm		Driver Brands	Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-260-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	Housing	Aluminium
SL-DL-260-10w-R-N.WHT		4000K	80	45	φ 75	1200 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-260-10w-R-WHT		6500K				1250 lm		Driver Brands	Philips / Fulham
								Dimming	Triac / 0-10v / Dali
SL-DL-260-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	Housing	Aluminium
SL-DL-260-15w-R-N.WHT		4000K	105	53	φ 95	1800 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-260-15w-R-WHT		6500K				1875 lm		Driver Brands	Philips / Fulham
								Dimming	Triac / 0-10v / Dali



Beam Angle




Application



On request also available in CCT - 2700K / 3500K / 5000K

DOWN LIGHT



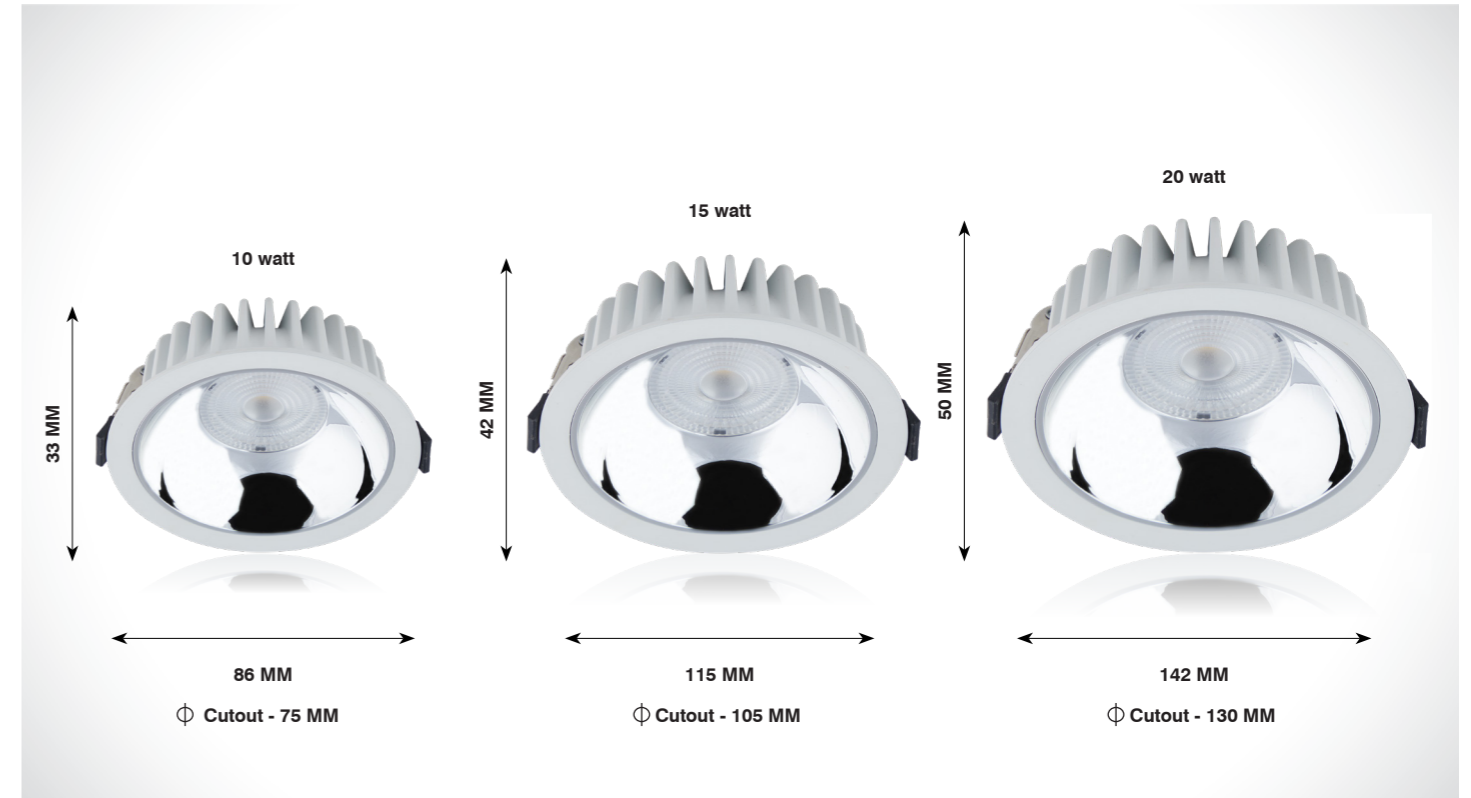


ADORA

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-244-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	Housing	Aluminium
SL-DL-244-10w-R-N.WHT		4000K	86	33	φ 75	1200 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-244-10w-R-WHT		6500K				1250 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-244-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	Housing	Aluminium
SL-DL-244-15w-R-N.WHT		4000K	115	42	φ 105	1800 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-244-15w-R-WHT		6500K				1875 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-244-20w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	2200 lm	36-42V@500mA	Housing	Aluminium
SL-DL-244-20w-R-N.WHT		4000K	142	50	φ 130	2400 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-244-20w-R-WHT		6500K				2500 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali



Beam Angle




Application



On request also available in CCT - 2700K / 3500K / 5000K

DOWN LIGHT

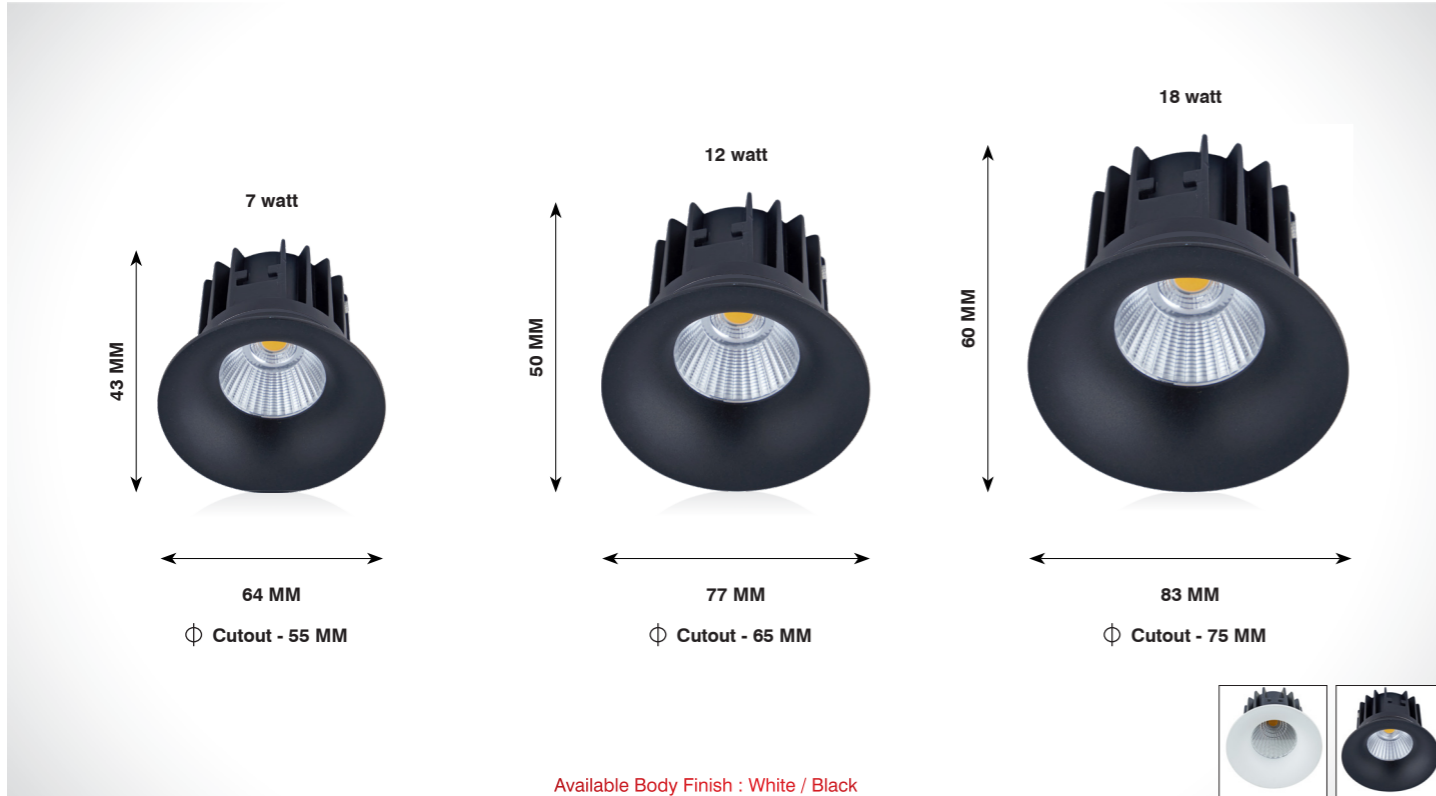


MELBA

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-254-7w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	770 lm	36-42V@150mA	Housing	Aluminium
SL-DL-254-7w-R-N.WHT		4000K	64	43	φ 55	840 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-254-7w-R-WHT		6500K				875 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-254-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	36-42V@300mA	Housing	Aluminium
SL-DL-254-12w-R-N.WHT		4000K	77	50	φ 65	1440 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-254-12w-R-WHT		6500K				1500 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-254-18w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1980 lm	36-42V@400mA	Housing	Aluminium
SL-DL-254-18w-R-N.WHT		4000K	83	60	φ 75	2160 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-254-18w-R-WHT		6500K				2250 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali




Beam Angle



On request also available in CCT - 2700K / 3500K / 5000K

DOWN LIGHT





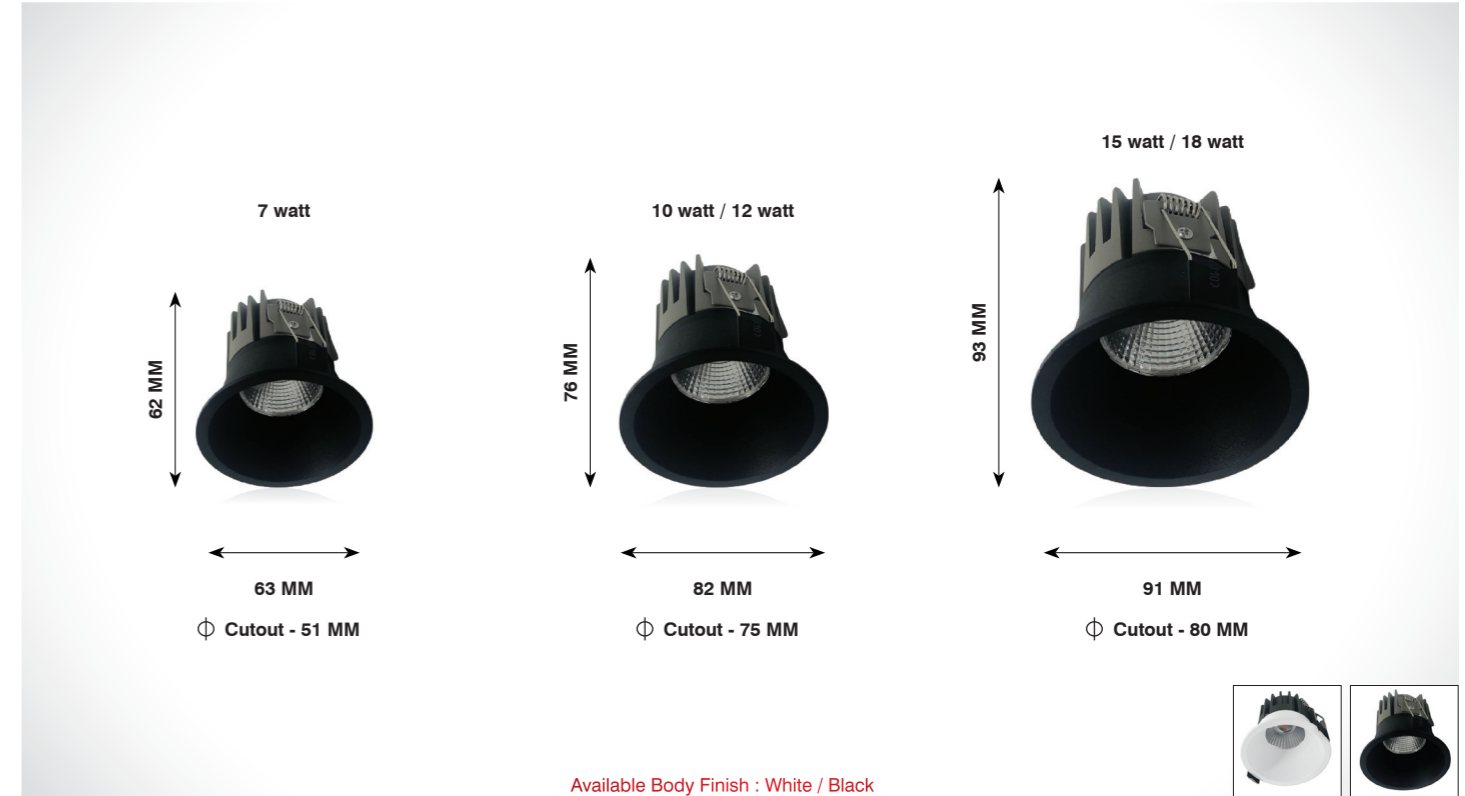


TRIGO

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-282-7w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	770 lm	36-42V@150mA	Housing	Aluminium
SL-DL-282-7w-R-N.WHT		4000K	63	62	φ 51	840 lm		LED Make	Cree / Bridgelux
SL-DL-282-7w-R-WHT		6500K				875 lm		Driver Brands	Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-282-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	Housing	Aluminium
SL-DL-282-10w-R-N.WHT		4000K	82	76	φ 75	1200 lm		LED Make	Cree / Bridgelux
SL-DL-282-10w-R-WHT		6500K				1250 lm		Driver Brands	Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-282-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	36-42V@300mA	Housing	Aluminium
SL-DL-282-12w-R-N.WHT		4000K	82	76	φ 75	1440 lm		LED Make	Cree / Bridgelux
SL-DL-282-12w-R-WHT		6500K				1500 lm		Driver Brands	Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-282-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	Housing	Aluminium
SL-DL-282-15w-R-N.WHT		4000K	91	93	φ 80	1800 lm		LED Make	Cree / Bridgelux
SL-DL-282-15w-R-WHT		6500K				1875 lm		Driver Brands	Fulham
								Dimming	Triac / 0-10v / Dali
SL-DL-282-18w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1980 lm	36-42V@400mA	Housing	Aluminium
SL-DL-282-18w-R-N.WHT		4000K	91	93	φ 80	2160 lm		LED Make	Cree / Bridgelux
SL-DL-282-18w-R-WHT		6500K				2250 lm		Driver Brands	Fulham
								Dimming	Triac / 0-10v / Dali




Beam Angle



On request also available in CCT - 2700K / 3500K / 5000K

DOWN LIGHT



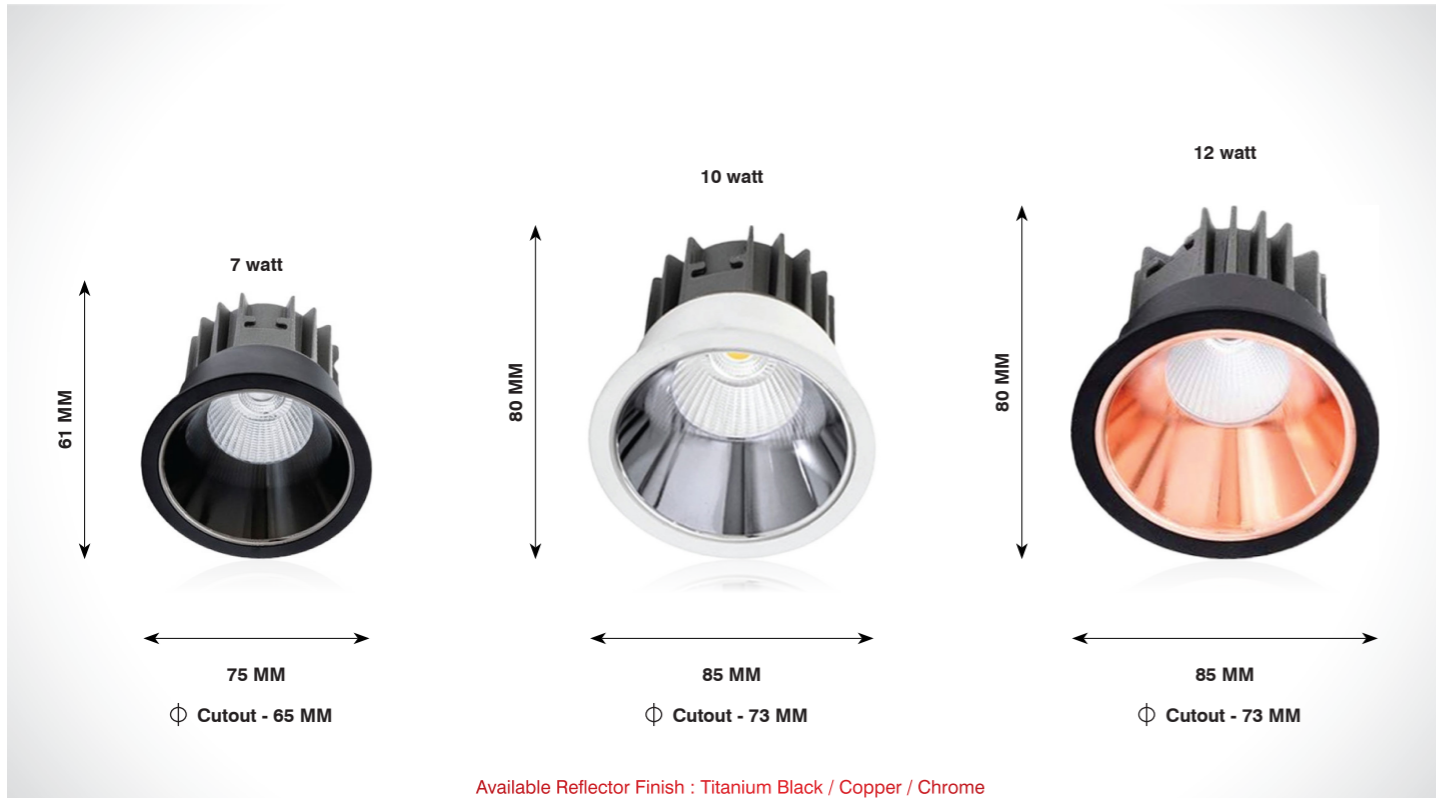


MARSH

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-288-7w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	770 lm	36-42V@150 mA	Housing	Aluminium
SL-DL-288-7w-R-N.WHT		4000K	75	61	φ 65	840 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-288-7w-R-WHT		6500K				875 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-288-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250 mA	Housing	Aluminium
SL-DL-288-10w-R-N.WHT		4000K	85	80	φ 73	1200 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-288-10w-R-WHT		6500K				1250 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-288-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	36-42V@300 mA	Housing	Aluminium
SL-DL-288-12w-R-N.WHT		4000K	85	80	φ 73	1440 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-288-12w-R-WHT		6500K				1500 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali



Beam Angle



Application



On request also available in CCT - 2700K / 3500K / 5000K

DOWN LIGHT





OWEN

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-220-9w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	990 lm	36-42V@200mA	Housing	Aluminium
SL-DL-220-9w-R-N.WHT		4000K	62	60	φ 55	1080 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-220-9w-R-WHT		6500K				1125 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-220-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	Housing	Aluminium
SL-DL-220-15w-R-N.WHT		4000K	80	90	φ 65	1800 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-220-15w-R-WHT		6500K				1875 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali



Beam Angle Swivel Angle




Application




On request also available in CCT - 2700K / 3500K / 5000K

DOWN LIGHT

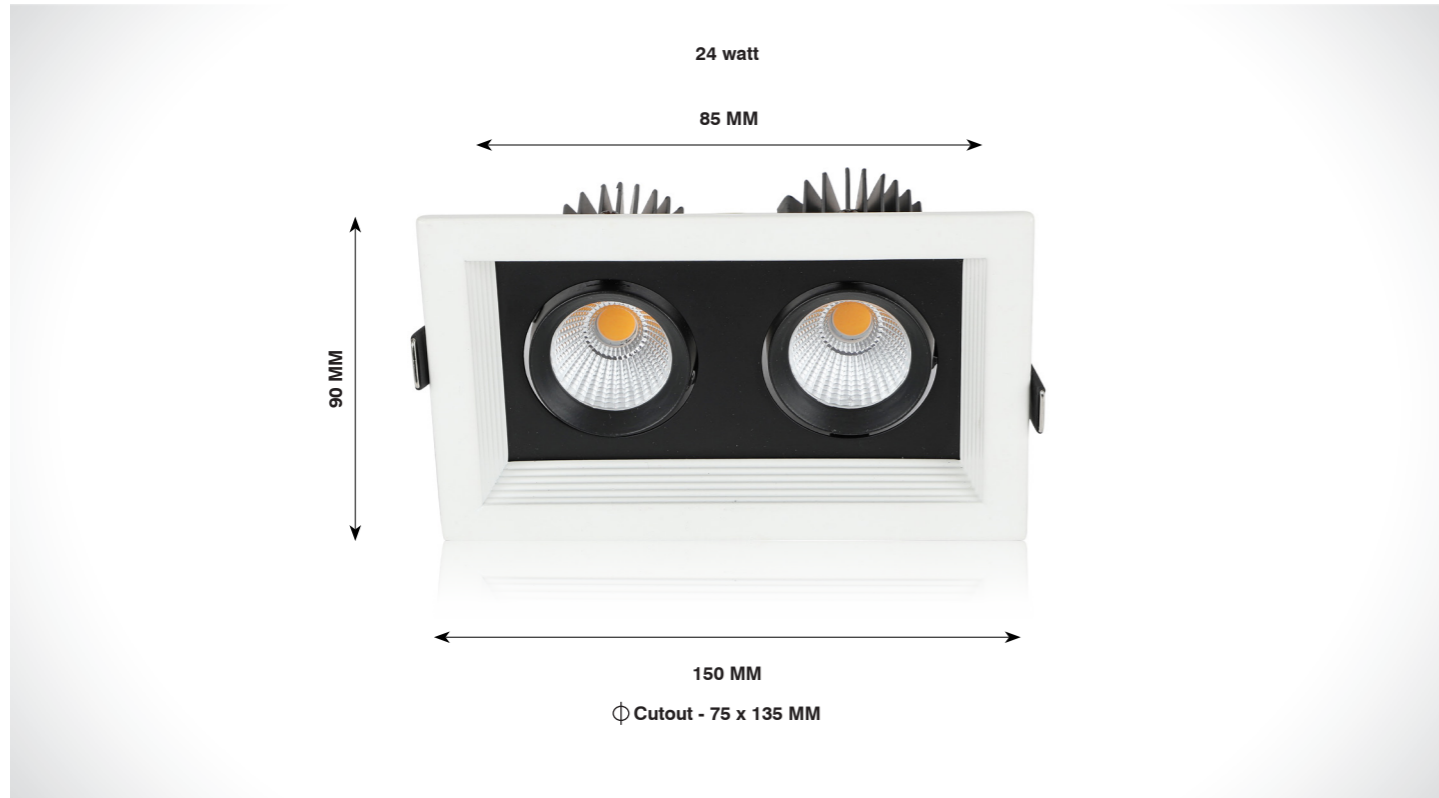

FLORIS

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-269-24w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	2640 lm	36-42V@300x2mA	Housing	Aluminium
SL-DL-269-24w-R-N.WHT		4000K	150 x 90	85	φ75 x 135	2880 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-269-24w-R-WHT		6500K				3000 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali

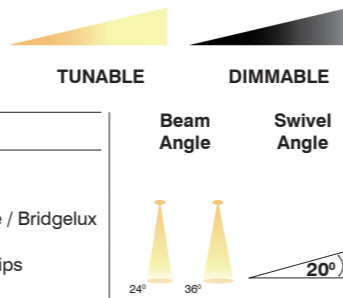


On request also available in CCT - 2700K / 3500K / 5000K

DOWN LIGHT




MADRID

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-272-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@300mA	Housing	Aluminium
SL-DL-272-10w-R-N.WHT		4000K	85	92	φ70	1200 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-272-10w-R-WHT		6500K				1250 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali

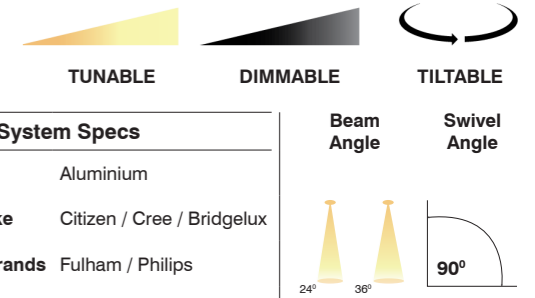

On request also available in CCT - 2700K / 3500K / 5000K

DOWN LIGHT

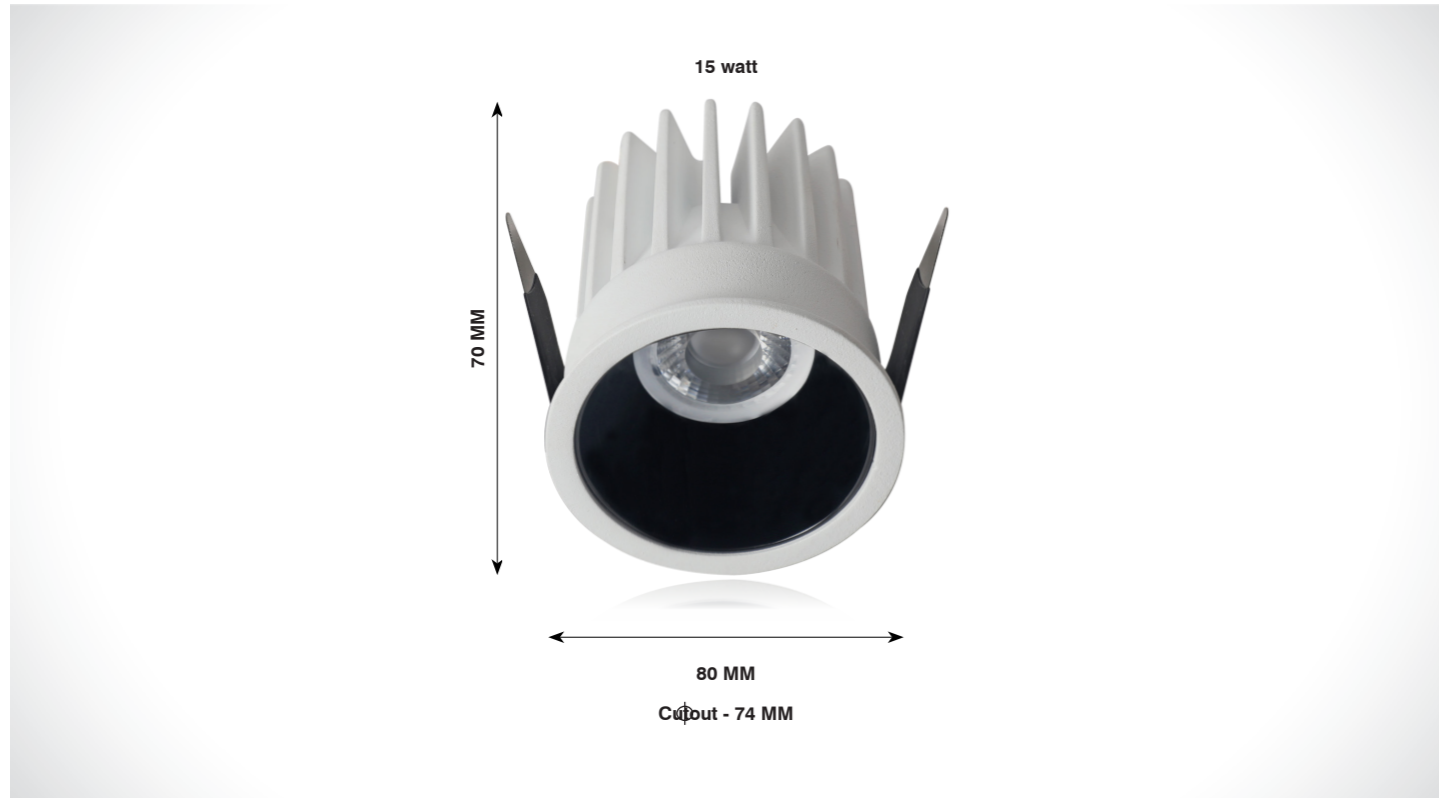


BARAK


Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-209-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	Housing	Aluminium
SL-DL-209-15w-R-N.WHT		4000K	80	70	φ 74	1800 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-209-15w-R-WHT		6500K				1875 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali



Beam Angle



DOWN LIGHT




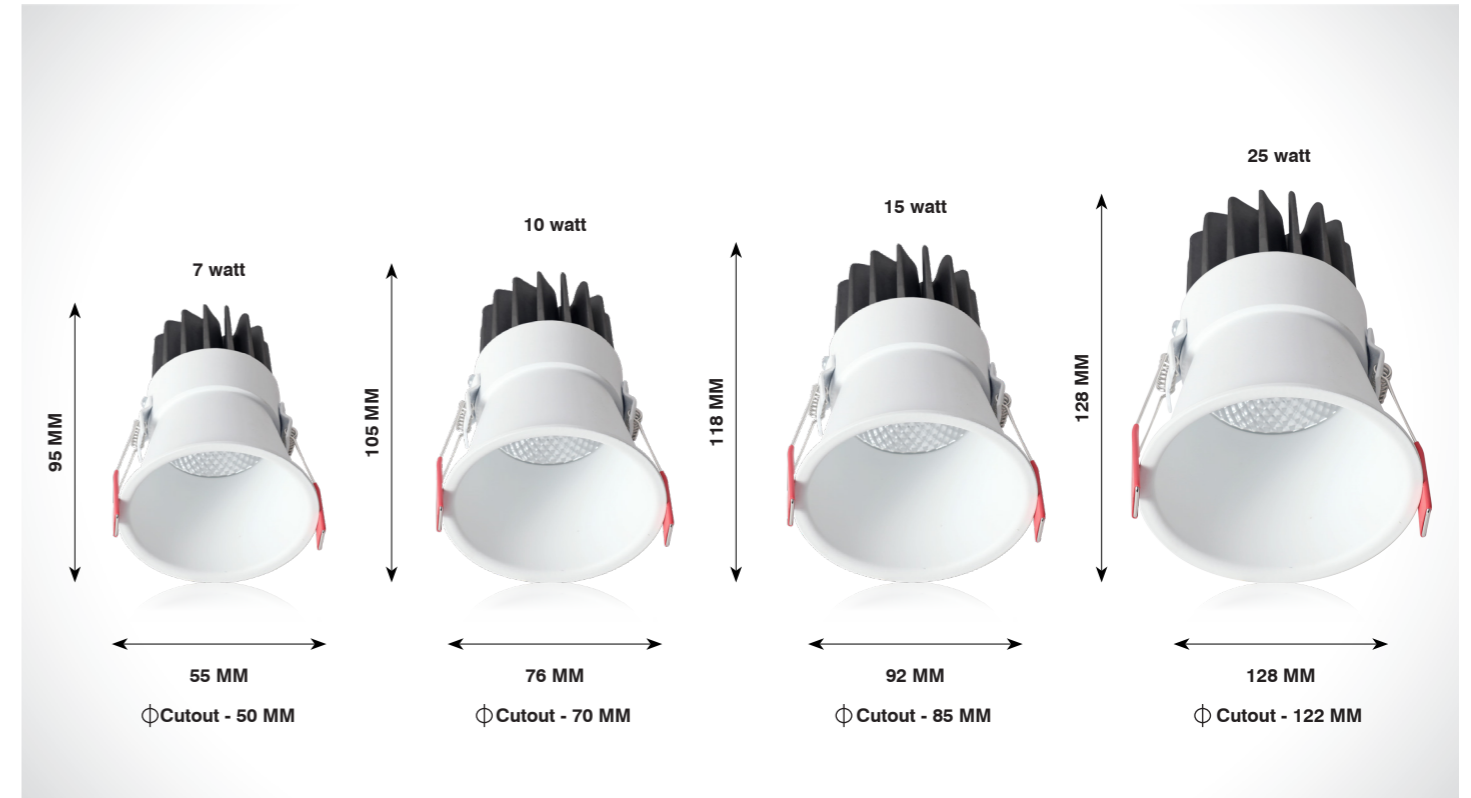


KOSTA

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-161-7w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	770 lm	36-42V@150mA	Housing	Aluminium
SL-DL-161-7w-R-N.WHT		4000K	55	95	φ 50	840 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-161-7w-R-WHT		6500K				875 lm		Driver Brands	Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-161-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	Housing	Aluminium
SL-DL-161-10w-R-N.WHT		4000K	76	105	φ 70	1200 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-161-10w-R-WHT		6500K				1250 lm		Driver Brands	Philips / Fulham
								Dimming	Triac / 0-10v / Dali
SL-DL-161-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	Housing	Aluminium
SL-DL-161-15w-R-N.WHT		4000K	92	118	φ 85	1800 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-161-15w-R-WHT		6500K				1875 lm		Driver Brands	Philips / Fulham
								Dimming	Triac / 0-10v / Dali
SL-DL-161-25w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	2750 lm	36-42V@700mA	Housing	Aluminium
SL-DL-161-25w-R-N.WHT		4000K	128	128	φ 122	3000 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-261-25w-R-WHT		6500K				3125 lm		Driver Brands	Fulham
								Dimming	Triac / 0-10v / Dali



Beam Angle




DOWN LIGHT




NEO

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-208-5w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	550 lm	36-42V@150mA	Housing	Aluminium
SL-DL-208-5w-R-N.WHT		4000K	60	45	φ 50	600 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-208-5w-R-WHT		6500K				625 lm		Driver Brands	Philips
SL-DL-208-5w-S-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	550 lm	36-42V@150mA	Housing	Aluminium
SL-DL-208-5w-S-N.WHT		4000K	60 x 60	45	φ 50	600 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-208-5w-S-WHT		6500K				625 lm		Driver Brands	Philips

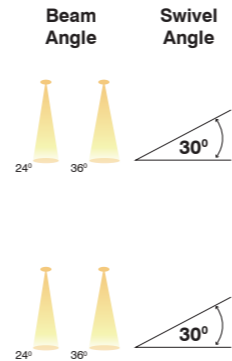


On request also available in CCT - 2700K / 3500K / 5000K

DOWN LIGHT

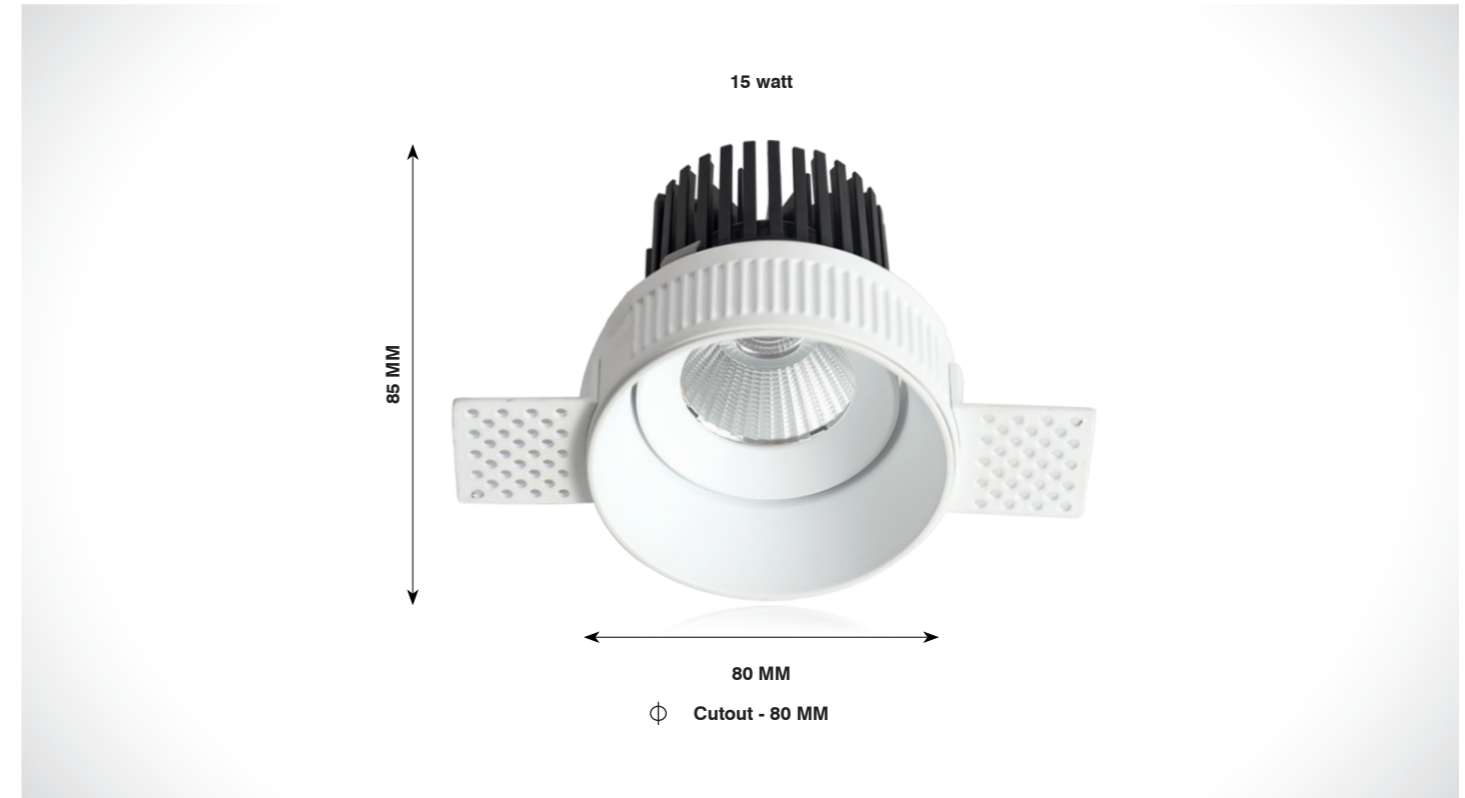


MINOS

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-153-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	Housing	Aluminium
SL-DL-153-15w-R-N.WHT		4000K	80	85	φ 80	1800 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-153-15w-R-WHT		6500K				1875 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali



On request also available in CCT - 2700K / 3500K / 5000K

DOWN LIGHT

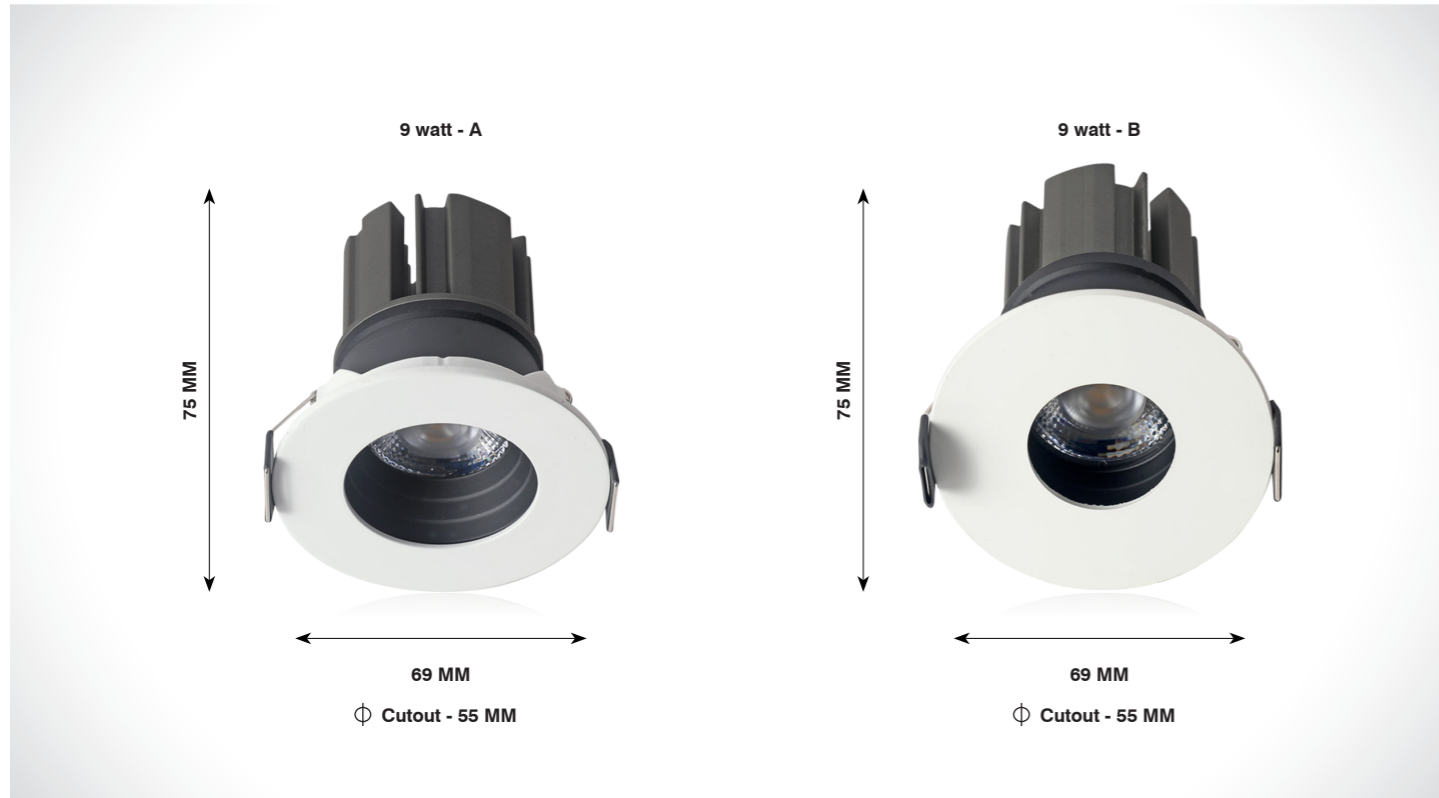

PENNE


Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Material
SL-DL-219-A-9w-R-W.WHT	80 / 90	3000K	69	75	φ 55	990 lm	36-42V@200mA	Housing	Aluminium
SL-DL-219-A-9w-R-N.WHT		4000K	69	75	φ 55	1080 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-219-A-9w-R-WHT		6500K				1125 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-219-B-9w-R-W.WHT	80 / 90	3000K	69	75	φ 55	990 lm	36-42V@200mA	Housing	Aluminium
SL-DL-219-B-9w-R-N.WHT		4000K	69	75	φ 55	1080 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-219-B-9w-R-WHT		6500K				1125 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali



On request also available in CCT - 2700K / 3500K / 5000K



DOWN LIGHT

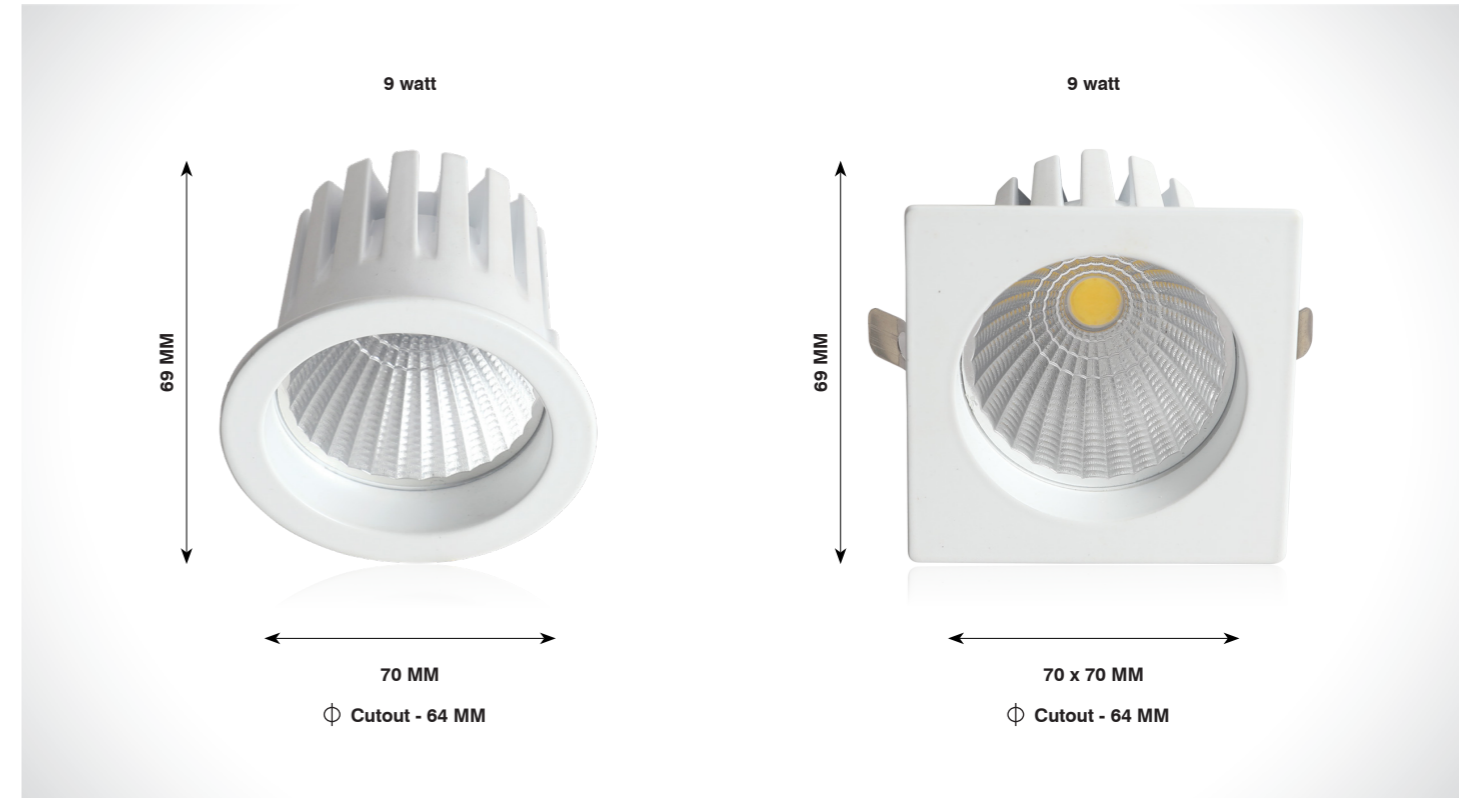

LEXIS


Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	Material
SL-DL-30-9w-R-W.WHT	80 / 90	3000K	70	69	φ 64	990 lm	36-42V@200mA	Housing	Aluminium
SL-DL-30-9w-R-N.WHT		4000K	70	69	φ 64	1080 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-30-9w-R-WHT		6500K				1125 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-30-9w-S-W.WHT	80 / 90	3000K	70 x 70	69	φ 64	990 lm	36-42V@200mA	Housing	Aluminium
SL-DL-30-9w-S-N.WHT		4000K	70 x 70	69	φ 64	1080 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-30-9w-S-WHT		6500K				1125 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali



On request also available in CCT - 2700K / 3500K / 5000K



DOWN LIGHT

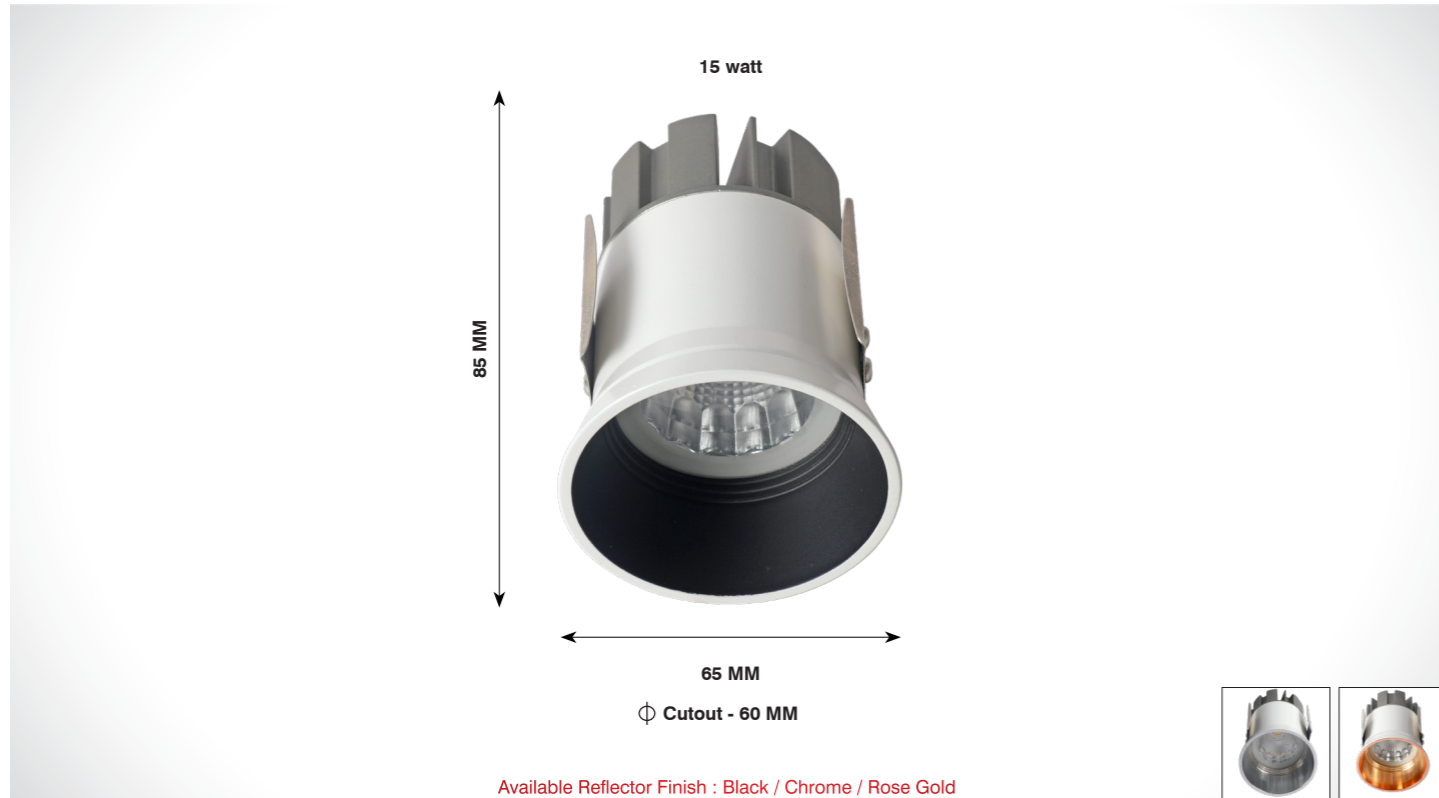


MYRA


Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-204-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	Housing	Aluminium
SL-DL-204-10w-R-N.WHT		4000K	65	85	∅ 60	1200 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-204-10w-R-WHT		6500K				1250 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali



Beam Angle



DOWN LIGHT

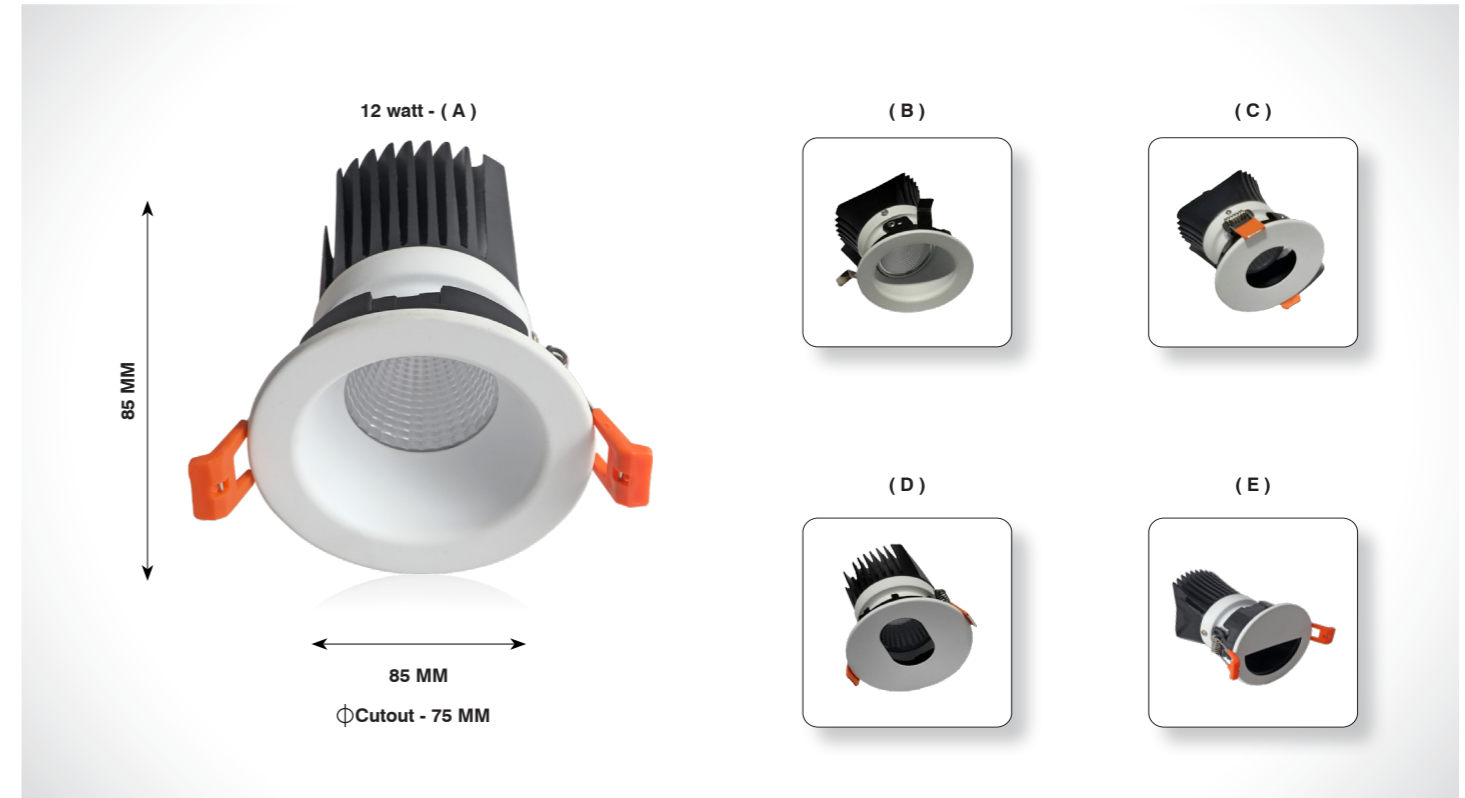


FABIO

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-138-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	36-42V@300mA	Housing	Aluminium
SL-DL-138-12w-R-N.WHT		4000K	85	85	∅ 75	1440 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-138-12w-R-WHT		6500K				1500 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali



Beam Angle Swivel Angle




DOWN LIGHT




JERRY

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-199-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	Housing	Aluminium
SL-DL-199-10w-R-N.WHT		4000K	57	50	∅ 52	1200 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-199-10w-R-WHT		6500K				1250 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali

Beam Angle



DOWN LIGHT

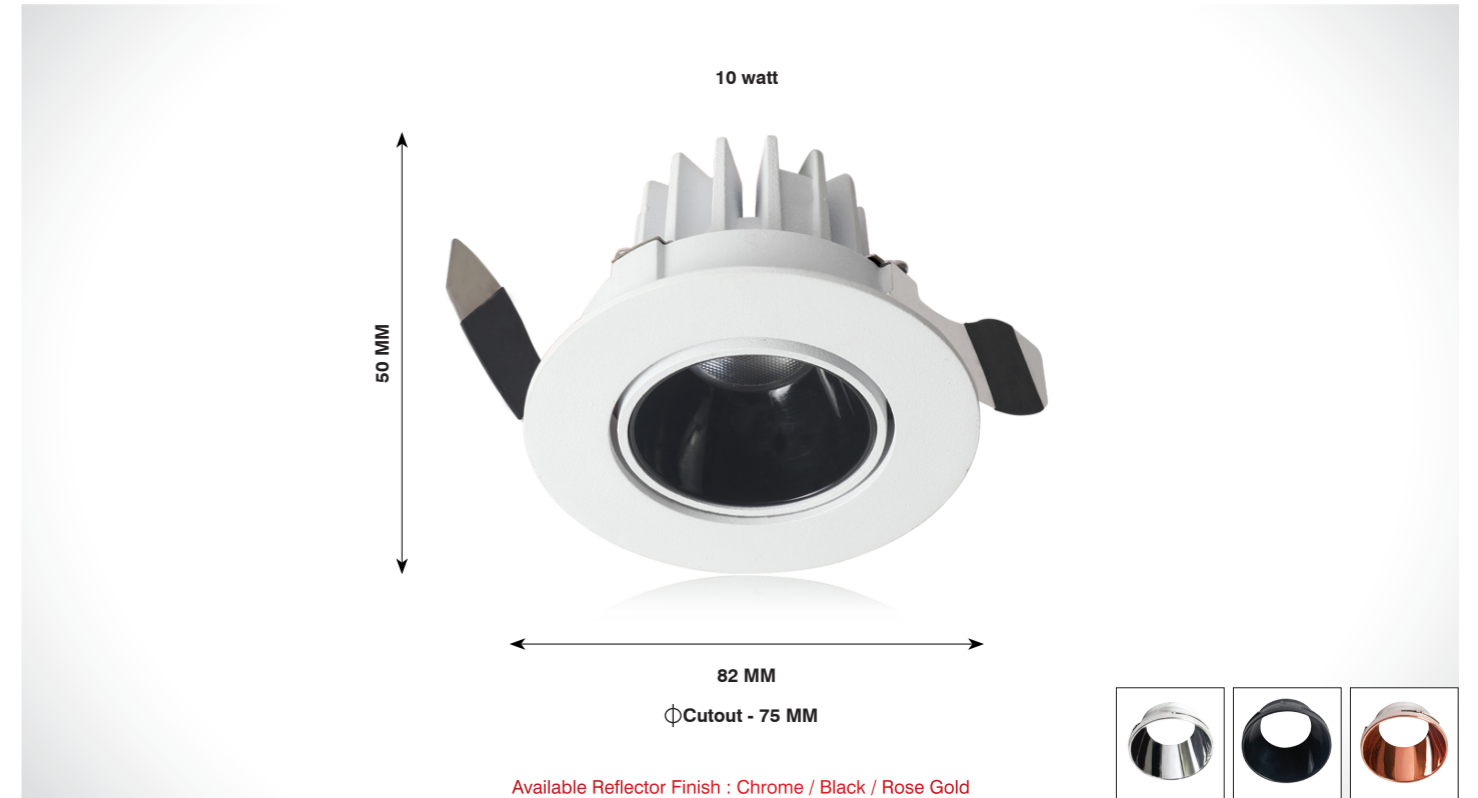

DORA

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-200-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	Housing	Aluminium
SL-DL-200-10w-R-N.WHT		4000K	82	50	∅ 75	1200 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-200-10w-R-WHT		6500K				1250 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali

Beam Angle



Swivel Angle



DOWN LIGHT



Available Body Finish : White / Black

TURIN

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	LED Make
SL-DL-308-6w-R-W.WHT	80 / 90	3000K				660 lm	36-42V@150mA	Aluminium	
SL-DL-308-6w-R-N.WHT		4000K	68	61	φ65	720 lm		Cree	
SL-DL-308-6w-R-WHT		6500K				750 lm		Fulham / Philips / Fulham	
								Triac / 0-10v / Dali	
SL-DL-309-10w-R-W.WHT	80 / 90	3000K				1100 lm	36-42V@250mA	Aluminium	
SL-DL-309-10w-R-N.WHT		4000K	78	68	φ75	1200 lm		Cree	
SL-DL-309-10w-R-WHT		6500K				1250 lm		Fulham / Philips / Fulham	
								Triac / 0-10v / Dali	



On request also available in CCT - 2700K / 3500K / 5000K

DOWN LIGHT




CRUZ

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	LED Make
SL-DL-201-12w-R-W.WHT	80 / 90	3000K				1320 lm	30-42V@300mA	Aluminium	
SL-DL-201-12w-R-N.WHT		4000K	103	40	φ95	1440 lm		Bridgelux	
SL-DL-201-12w-R-WHT		6500K				1500 lm		Fulham / Philips	
								Triac / 0-10v / Dali	
SL-DL-202-18w-R-W.WHT	80 / 90	3000K				1980 lm	52-65V@300mA	Aluminium	
SL-DL-202-18w-R-N.WHT		4000K	153	40	φ145	2160 lm		Bridgelux	
SL-DL-202-18w-R-WHT		6500K				2250 lm		Fulham / Philips	
								Triac / 0-10v / Dali	
SL-DL-203-24w-R-W.WHT	80 / 90	3000K				2640 lm	52-72V@300mA	Aluminium	
SL-DL-203-24w-R-N.WHT		4000K	211	40	φ203	2880 lm		Bridgelux	
SL-DL-203-24w-R-WHT		6500K				3000 lm		Fulham / Philips / HR	
								Triac / 0-10v / Dali	



On request also available in CCT - 2700K / 3500K / 5000K

DOWN LIGHT

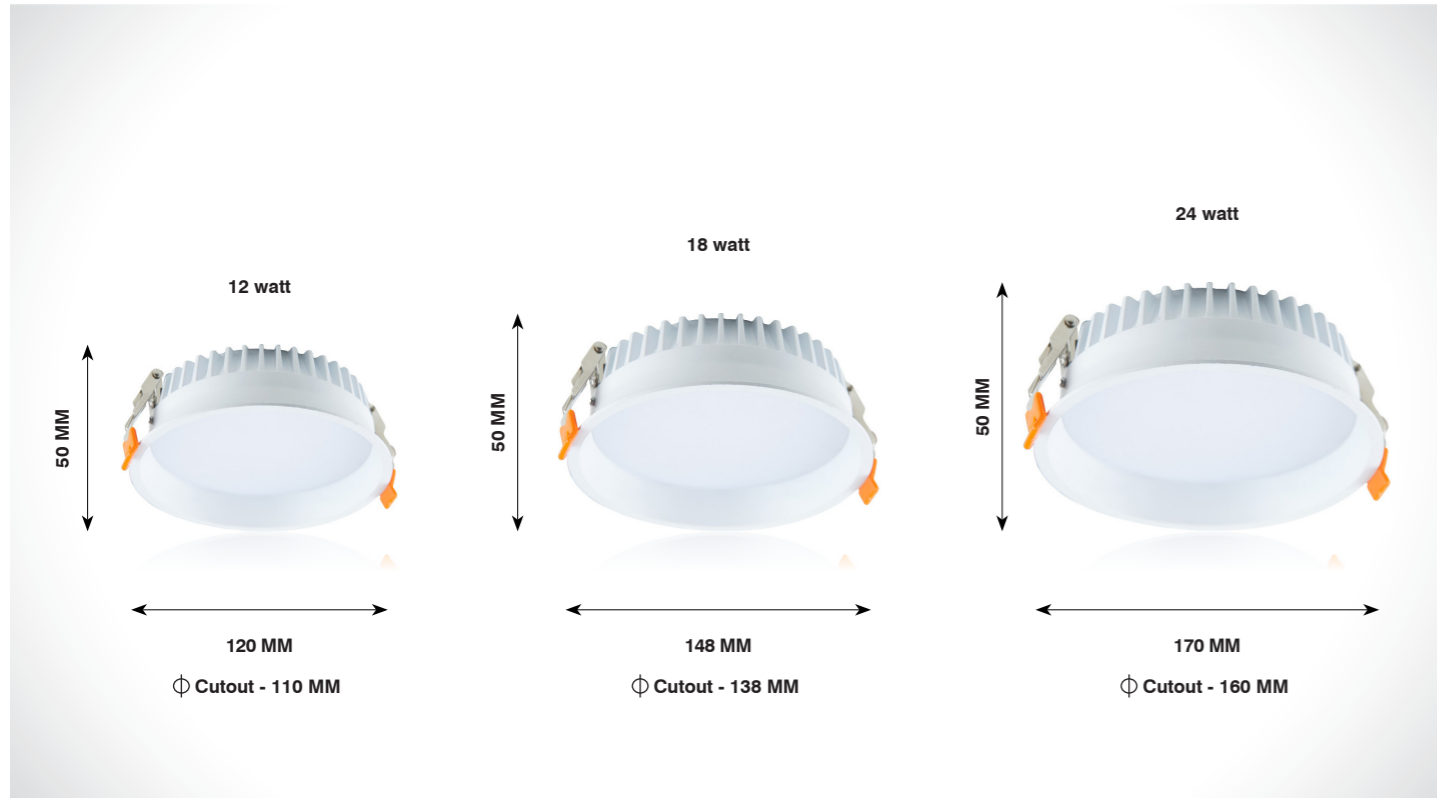


JASPER


Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-242-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	30-42V@300mA	Housing	Aluminium
SL-DL-242-12w-R-N.WHT		4000K	120	50	φ110	1440 lm		LED Make	Bridgelux
SL-DL-242-12w-R-WHT		6500K				1500 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-242-18w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1980 lm	52-65V@300mA	Housing	Aluminium
SL-DL-242-18w-R-N.WHT		4000K	148	50	φ138	2160 lm		LED Make	Bridgelux
SL-DL-242-18w-R-WHT		6500K				2250 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-242-24w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	2640 lm	52-72V@300mA	Housing	Aluminium
SL-DL-242-24w-R-N.WHT		4000K	170	50	φ160	2880 lm		LED Make	Bridgelux
SL-DL-242-24w-R-WHT		6500K				3000 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali



Beam Angle



DOWN LIGHT

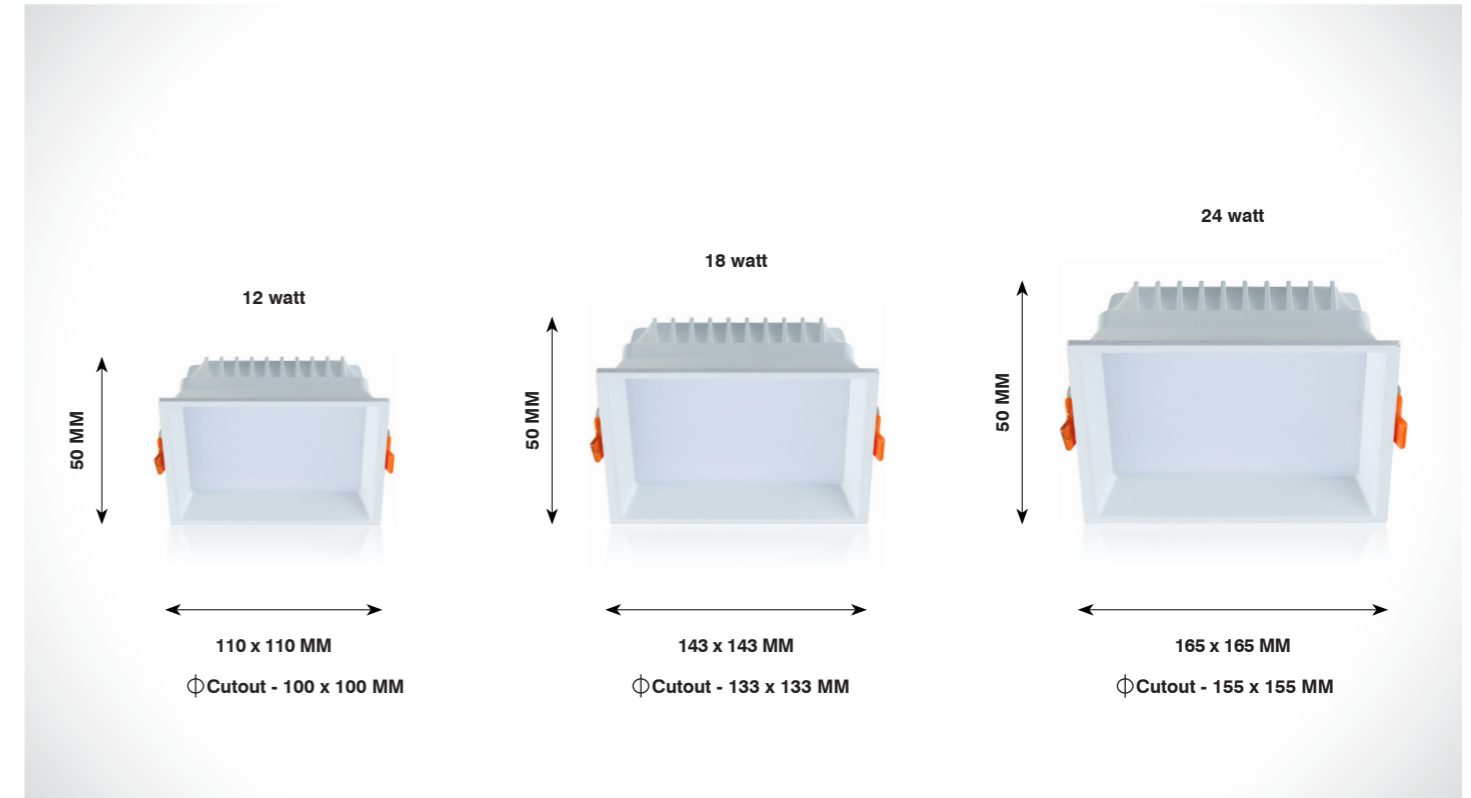


ROLLO

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-243-12w-S-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	30-42V@300mA	Housing	Aluminium
SL-DL-243-12w-S-N.WHT		4000K	110 x 110	50	φ100 x 100	1440 lm		LED Make	Bridgelux
SL-DL-243-12w-S-WHT		6500K				1500 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-243-18w-S-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1980 lm	52-65V@300mA	Housing	Aluminium
SL-DL-243-18w-S-N.WHT		4000K	143 x 143	50	φ133 x 133	2160 lm		LED Make	Bridgelux
SL-DL-243-18w-S-WHT		6500K				2250 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-243-24w-S-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	2640 lm	52-72V@300mA	Housing	Aluminium
SL-DL-243-24w-S-N.WHT		4000K	165 x 165	50	φ155 x 155	2880 lm		LED Make	Bridgelux
SL-DL-243-24w-S-WHT		6500K				3000 lm		Driver Brands	Fulham / Philips / HR
								Dimming	Triac / 0-10v / Dali

Beam Angle



DOWN LIGHT


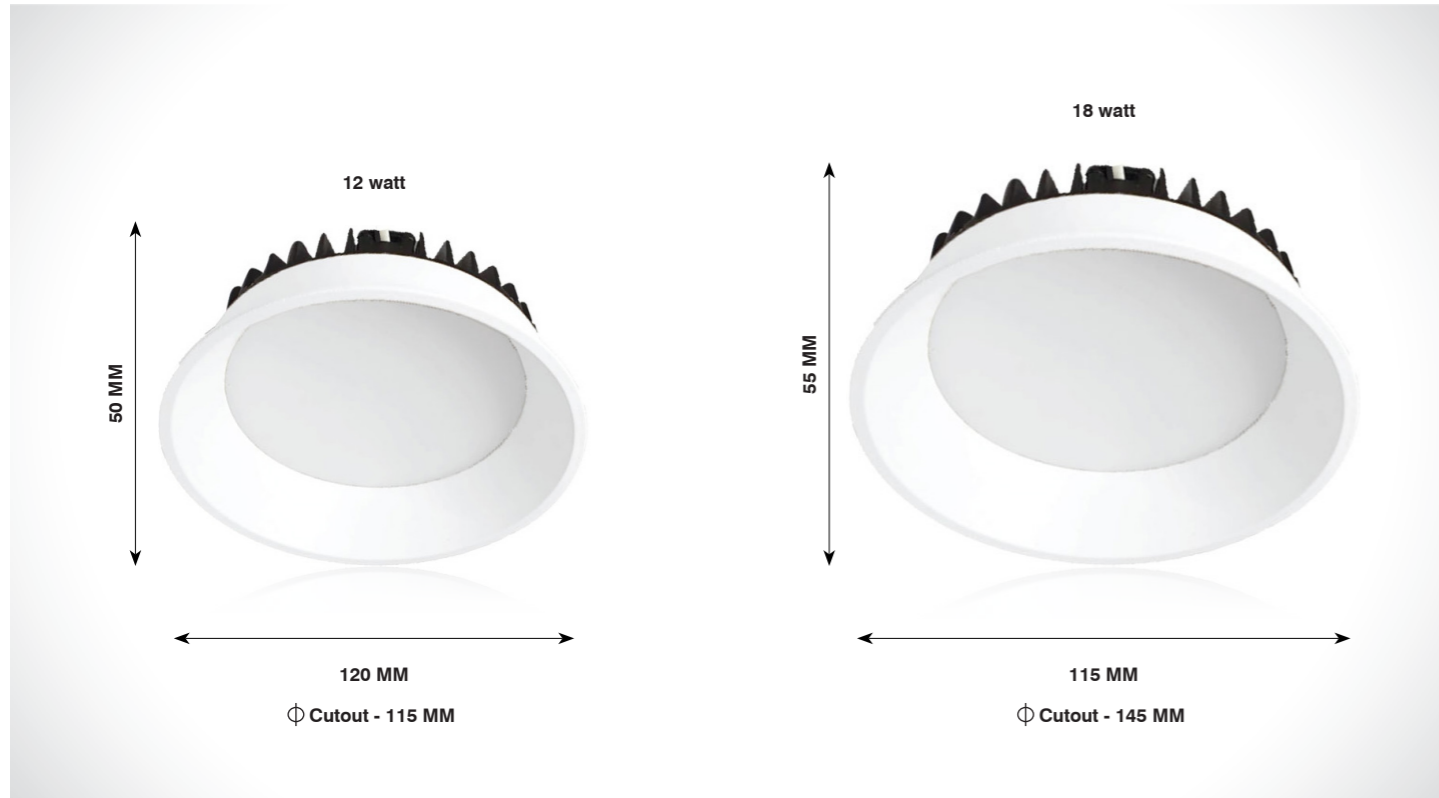


GARISH


Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-289-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	30-40V@300mA	Housing	Aluminium
SL-DL-289-12w-R-N.WHT		4000K	120	50	Φ115	1440 lm		LED Make	Bridgelux
SL-DL-289-12w-R-WHT		6500K				1500 lm		Driver Brands	Srishti / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-289-18w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1980 lm	50-65V@300mA	Housing	Aluminium
SL-DL-289-18w-R-N.WHT		4000K	115	55	Φ145	2160 lm		LED Make	Bridgelux
SL-DL-289-18w-R-WHT		6500K				2250 lm		Driver Brands	Srishti / Philips
								Dimming	Triac / 0-10v / Dali



Beam Angle



DOWN LIGHT

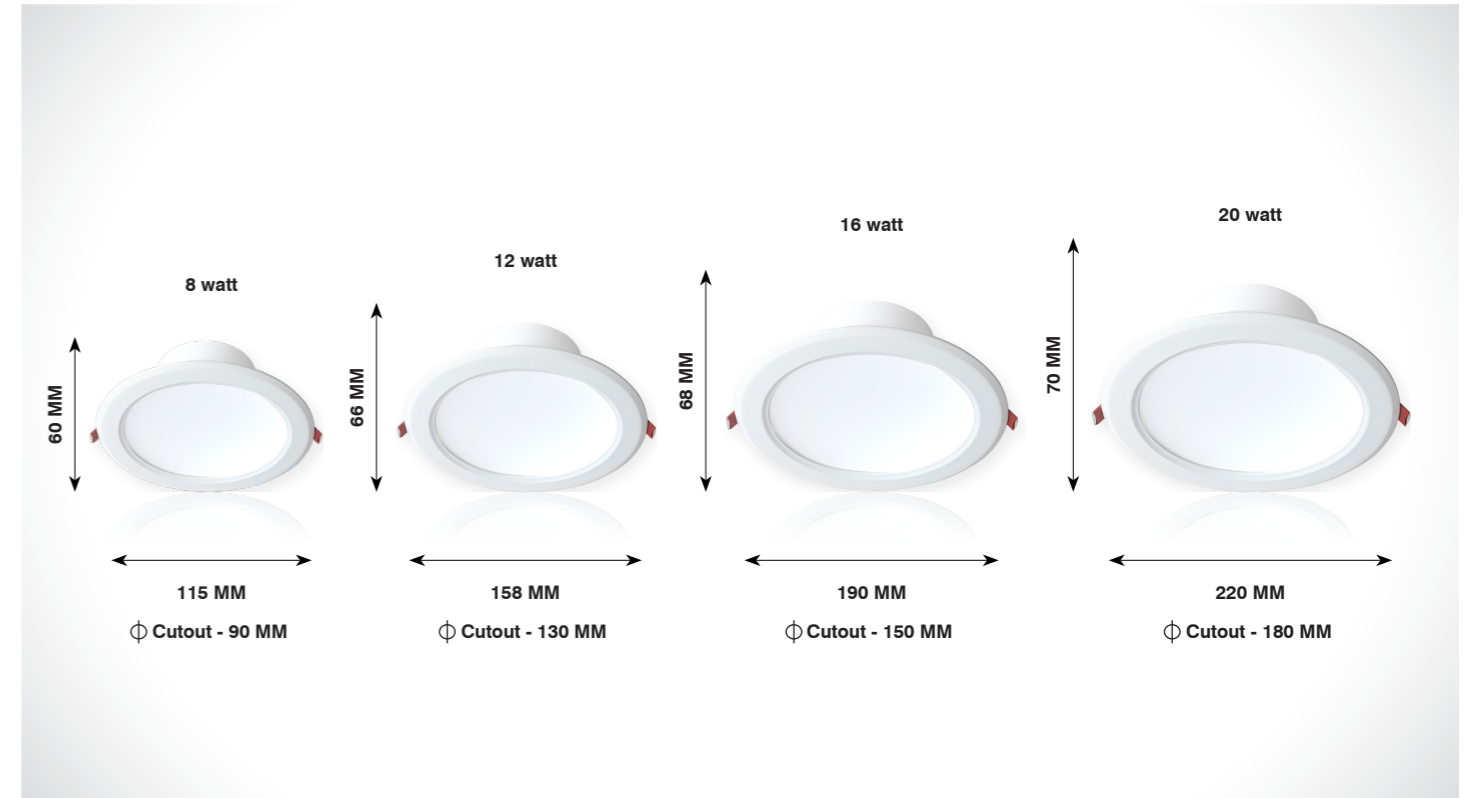


SONET

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-26-8w-R-W.WHT	80	3000K	Diameter	Height	Cutout	880 lm	16-28V@300mA	Housing	Aluminium
SL-DL-26-8w-R-N.WHT		4000K	115	60	Φ90	960 lm		LED Make	Samsung
SL-DL-26-8w-R-WHT		6500K				1000 lm		Driver Brands	Srishti
SL-DL-27-12w-R-W.WHT	80	3000K	Diameter	Height	Cutout	1320 lm	27-40V@300mA	Housing	Aluminium
SL-DL-27-12w-R-N.WHT		4000K	158	66	Φ130	1440 lm		LED Make	Samsung
SL-DL-27-12w-R-WHT		6500K				1500 lm		Driver Brands	Srishti
SL-DL-28-16w-R-W.WHT	80	3000K	Diameter	Height	Cutout	1760 lm	40-65V@300mA	Housing	Aluminium
SL-DL-28-16w-R-N.WHT		4000K	190	68	Φ150	1920 lm		LED Make	Samsung
SL-DL-28-16w-R-WHT		6500K				2000 lm		Driver Brands	Srishti
SL-DL-29-20w-R-W.WHT	80	3000K	Diameter	Height	Cutout	2200 lm	40-65V@300mA	Housing	Aluminium
SL-DL-29-20w-R-N.WHT		4000K	220	70	Φ180	2400 lm		LED Make	Samsung
SL-DL-29-20w-R-WHT		6500K				2500 lm		Driver Brands	Srishti

Beam Angle



DOWN LIGHT SERIES

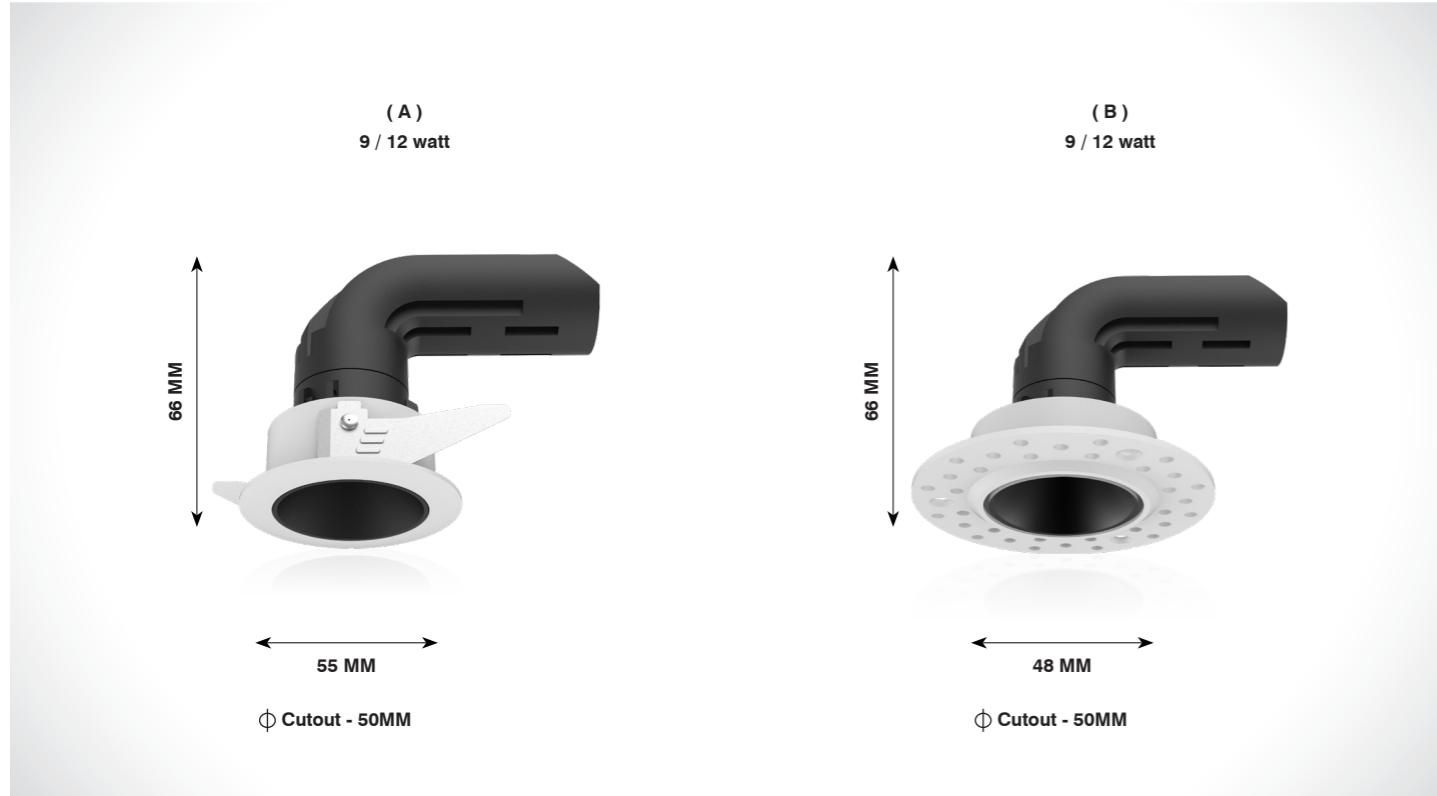



Recessed Lighting

ZEFI A

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-318-9w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	990 lm	36-42@200mA	Housing	Aluminium
SL-DL-318-9w-R-N.WHT		4000K	55	66	Ø50	1080 lm		LED Make	Cree
SL-DL-318-9w-R-WHT		6500K				1125 lm		Driver Brands	Srishti
								Dimming	Triac / 0-10v / Dali
SL-DL-318-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	36-42@300mA	Housing	Aluminium
SL-DL-318-12w-R-N.WHT		4000K	55	66	Ø50	1440 lm		LED Make	Cree
SL-DL-318-12w-R-WHT		6500K				1500 lm		Driver Brands	Srishti
								Dimming	Triac / 0-10v / Dali





Beam Angle



ZEFI B

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-319-9w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	990 lm	36-42@200mA	Housing	Aluminium
SL-DL-319-9w-R-N.WHT		4000K	48	66	Ø50	1080 lm		LED Make	Cree
SL-DL-319-9w-R-WHT		6500K				1125 lm		Driver Brands	Srishti
								Dimming	Triac / 0-10v / Dali
SL-DL-319-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	36-42@300mA	Housing	Aluminium
SL-DL-319-12w-R-N.WHT		4000K	48	66	Ø50	1440 lm		LED Make	Cree
SL-DL-319-12w-R-WHT		6500K				1500 lm		Driver Brands	Srishti
								Dimming	Triac / 0-10v / Dali

Beam Angle




Application



On request also available in CCT - 2700K / 3500K / 5000K

DOWN LIGHT SERIES

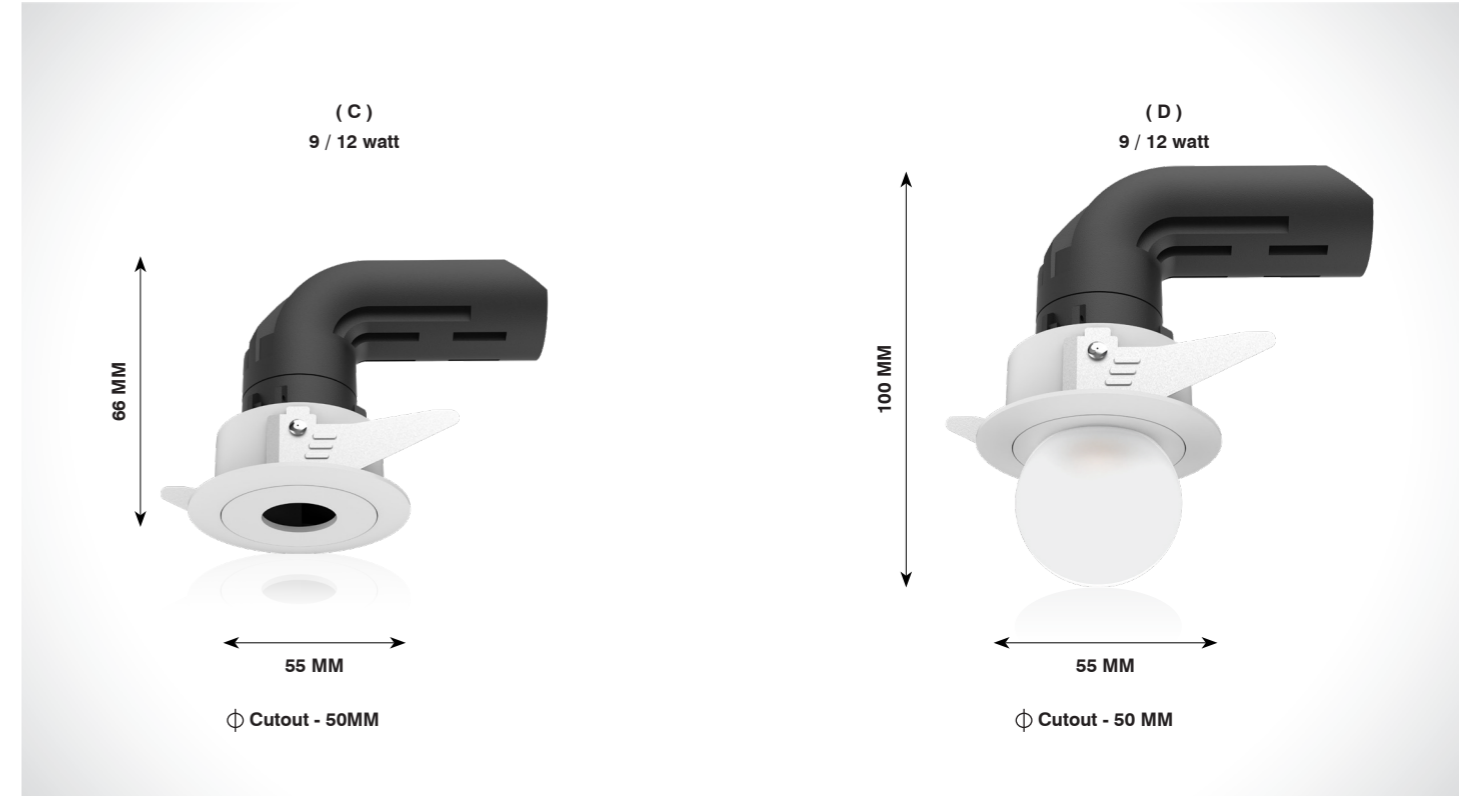



Recessed Lighting

ZEFI C

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-320-9w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	990 lm	36-42@200mA	Housing	Aluminium
SL-DL-320-9w-R-N.WHT		4000K	55	66	Ø50	1080 lm		LED Make	Cree
SL-DL-320-9w-R-WHT		6500K				1125 lm		Driver Brands	Srishti
								Dimming	Triac / 0-10v / Dali
SL-DL-320-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	36-42@300mA	Housing	Aluminium
SL-DL-320-12w-R-N.WHT		4000K	55	66	Ø50	1440 lm		LED Make	Cree
SL-DL-320-12w-R-WHT		6500K				1500 lm		Driver Brands	Srishti
								Dimming	Triac / 0-10v / Dali





Beam Angle



ZEFI D

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-321-9w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	990 lm	36-42@200mA	Housing	Aluminium
SL-DL-321-9w-R-N.WHT		4000K	55	100	Ø50	1080 lm		LED Make	Cree
SL-DL-321-9w-R-WHT		6500K				1125 lm		Driver Brands	Srishti
								Dimming	Triac / 0-10v / Dali
SL-DL-321-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	36-42@300mA	Housing	Aluminium
SL-DL-321-12w-R-N.WHT		4000K	55	100	Ø50	1440 lm		LED Make	Cree
SL-DL-321-12w-R-WHT		6500K				1500 lm		Driver Brands	Srishti
								Dimming	Triac / 0-10v / Dali

Beam Angle



Application



On request also available in CCT - 2700K / 3500K / 5000K

DOWN LIGHT SERIES



Available Body Colour : Black / White



LE MOS

IP65



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-314-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-40V@200mA	Housing	Aluminium
SL-DL-314-10w-R-N.WHT		4000K	90	90	Ø60	1200 lm		LED Make	Cree/Bridgelux/Citizen
SL-DL-314-10w-R-WHT		6500K				1250 lm		Driver Brands	Philips / Fulham
								Dimming	Triac / 0-10v / Dali
SL-DL-314-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	Housing	Aluminium
SL-DL-314-15w-R-N.WHT		4000K	90	90	Ø60	1800 lm		LED Make	Cree/Bridgelux/Citizen
SL-DL-314-15w-R-WHT		6500K				1875 lm		Driver Brands	Philips / Fulham
								Dimming	Triac / 0-10v / Dali

Beam Angle




Application



On request also available in CCT - 2700K / 3500K / 5000K

RETROFIT LAMPS SERIES

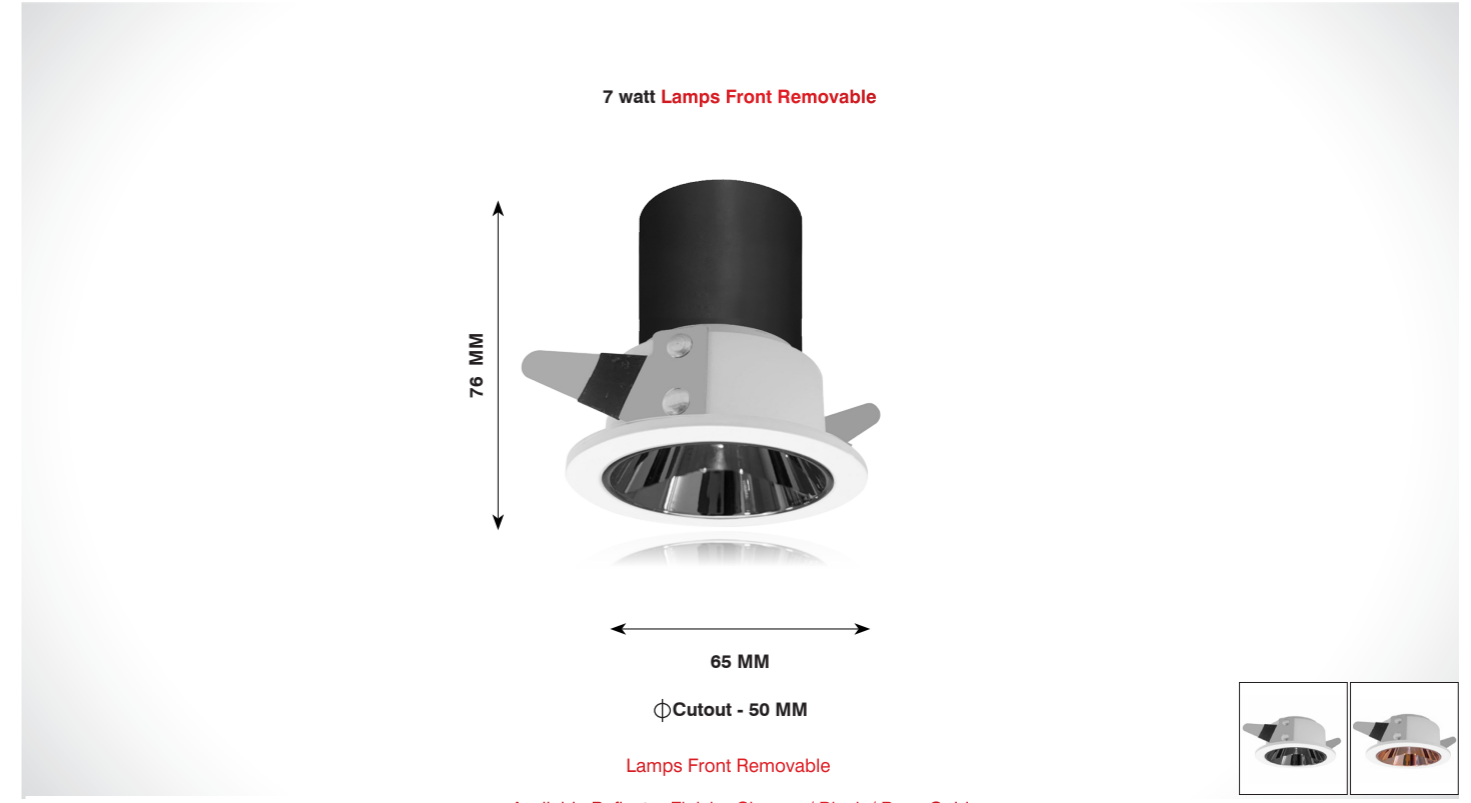


Available Reflector Finish : Chrome / Black / Rose Gold

SAL TO



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-327-7w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	770 lm	36-42V@150mA	Housing	Aluminium
SL-DL-327-7w-R-N.WHT		4000K	65	76	Ø55	840 lm		LED Make	Cree
SL-DL-327-7w-R-WHT		6500K				875 lm		Driver Brands	Philips
								Dimming	Triac / 0-10v / Dali

Beam Angle



Application



On request also available in CCT - 2700K / 3500K / 5000K



RETROFIT LAMP SERIES

RETROFIT LAMP




Available Reflector Finish : Chrome / Rose Gold / White / Black

FELIX

Imported Module




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-262-6w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	660 lm	36-42V@150mA	Housing	Aluminium
SL-DL-262-6w-R-N.WHT		4000K	85	90	φ75	720 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-262-6w-R-WHT		6500K				750 lm		Driver Brands	Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-262-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	Housing	Aluminium
SL-DL-262-10w-R-N.WHT		4000K	85	110	φ75	1200 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-262-10w-R-WHT		6500K				1250 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-262-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	Housing	Aluminium
SL-DL-262-15w-R-N.WHT		4000K	85	115	φ75	1800 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-262-15w-R-WHT		6500K				1875 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali

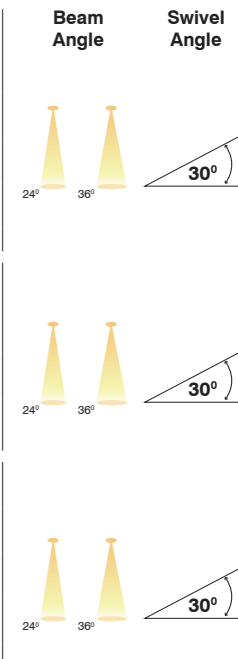

On request also available in CCT - 2700K / 3500K / 5000K

RETROFIT LAMP

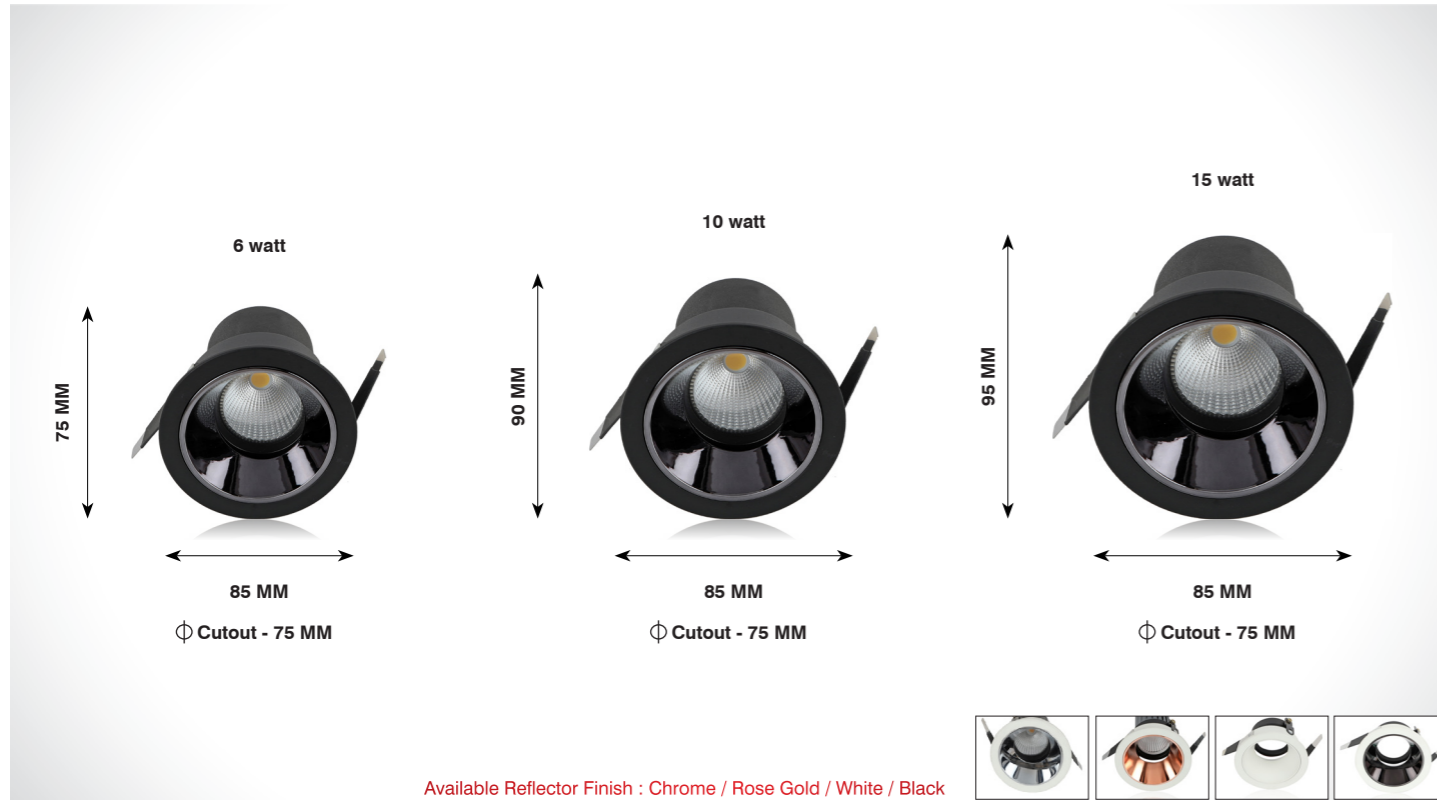


BONITO

Imported Module



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-263-6w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	660 lm	36-42V@150mA	Housing	Aluminium
SL-DL-263-6w-R-N.WHT		4000K	85	75	φ75	720 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-263-6w-R-WHT		6500K				750 lm		Driver Brands	Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-263-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	Housing	Aluminium
SL-DL-263-10w-R-N.WHT		4000K	85	90	φ75	1200 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-263-10w-R-WHT		6500K				1250 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-263-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	Housing	Aluminium
SL-DL-263-15w-R-N.WHT		4000K	85	95	φ75	1800 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-263-15w-R-WHT		6500K				1875 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali

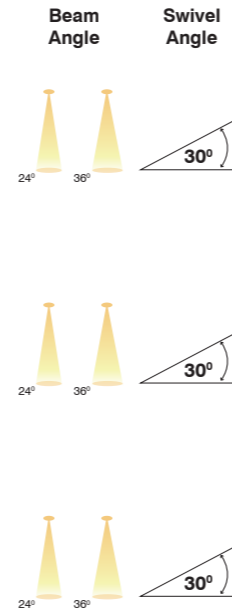

On request also available in CCT - 2700K / 3500K / 5000K



RETROFIT LAMP




VELENO

Imported Module (Front Openable)




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-284-6w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	660 lm	36-42V@150mA	Housing	Aluminium
SL-DL-284-6w-R-N.WHT		4000K	85	75	φ75	720 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-284-6w-R-WHT		6500K				750 lm		Driver Brands	Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-284-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	Housing	Aluminium
SL-DL-284-10w-R-N.WHT		4000K	85	90	φ75	1200 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-284-10w-R-WHT		6500K				1250 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-284-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	Housing	Aluminium
SL-DL-284-15w-R-N.WHT		4000K	85	95	φ75	1800 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-284-15w-R-WHT		6500K				1875 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali

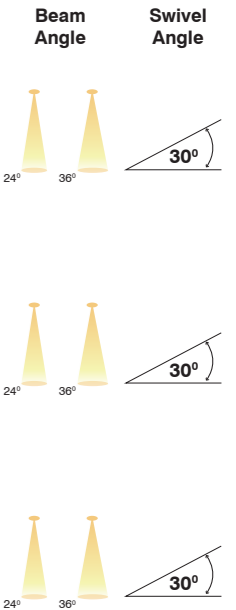

On request also available in CCT - 2700K / 3500K / 5000K



RETROFIT LAMP

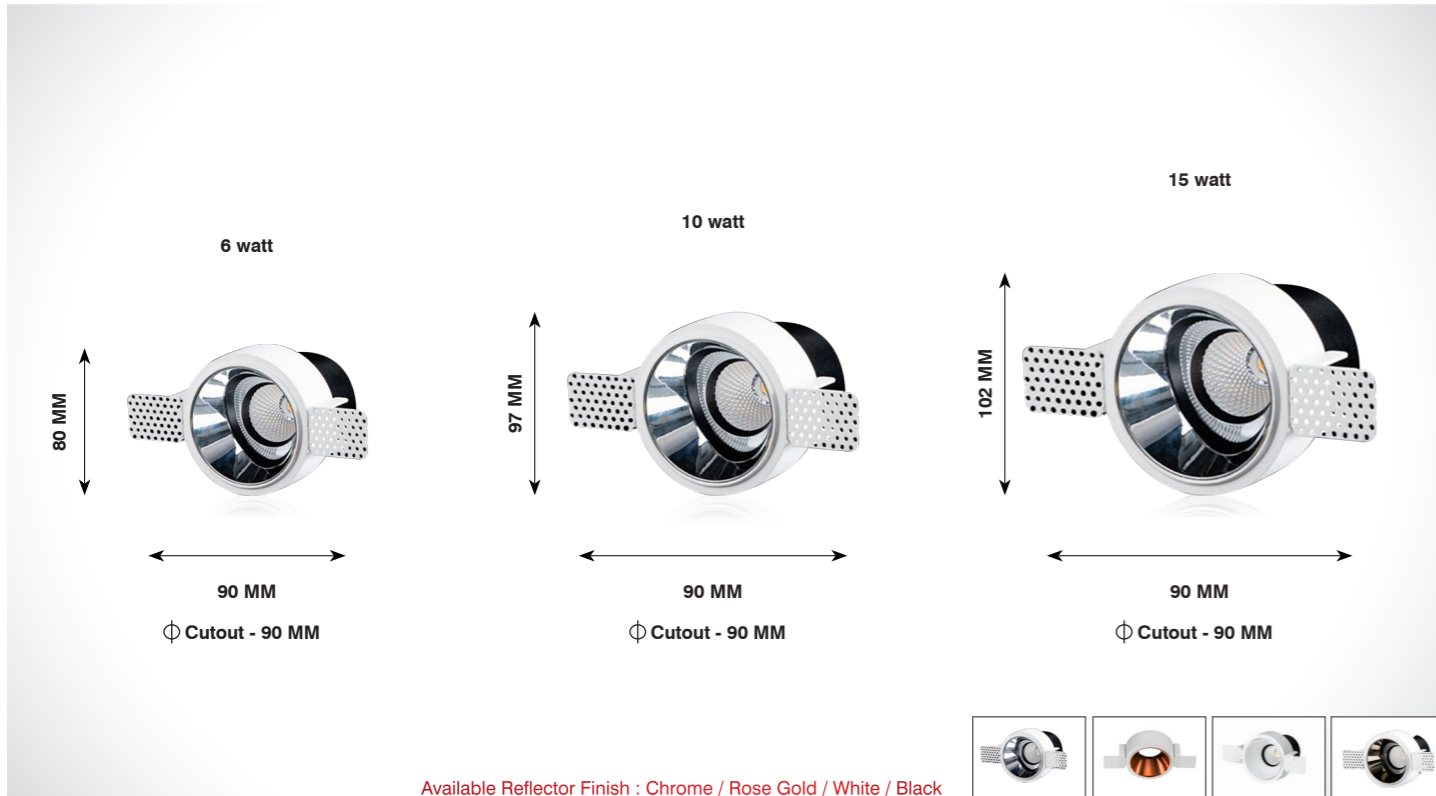




SNIPER

Imported Module

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	LED Make
SL-DL-275-6w-R-W.WHT	80 / 90	3000K				660 lm	36-42V@150mA	Aluminium	
SL-DL-275-6w-R-N.WHT		4000K	90	80	φ90	720 lm		Citizen / Cree / Bridgelux	
SL-DL-275-6w-R-WHT		6500K				750 lm		Philips	
								Triac / 0-10v / Dali	
SL-DL-275-10w-R-W.WHT	80 / 90	3000K				1100 lm	36-42V@250mA	Aluminium	
SL-DL-275-10w-R-N.WHT		4000K	90	97	φ90	1200 lm		Citizen / Cree / Bridgelux	
SL-DL-275-10w-R-WHT		6500K				1250 lm		Fulham / Philips	
								Triac / 0-10v / Dali	
SL-DL-275-15w-R-W.WHT	80 / 90	3000K				1650 lm	36-42V@350mA	Aluminium	
SL-DL-275-15w-R-N.WHT		4000K	90	102	φ90	1800 lm		Citizen / Cree / Bridgelux	
SL-DL-275-15w-R-WHT		6500K				1875 lm		Fulham / Philips	
								Triac / 0-10v / Dali	



Beam Angle



Application



On request also available in CCT - 2700K / 3500K / 5000K

RETROFIT LAMP




IVAN

Indian Module

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs		Beam Angle	Swivel Angle
			Diameter	Height	Cutout			Housing	LED Make		
SL-DL-276-10w-R-W.WHT	80 / 90	3000K				1100 lm	36-42V@250mA	Aluminium			
SL-DL-276-10w-R-N.WHT		4000K	85	110	φ75	1200 lm		Citizen / Cree / Bridgelux	24° 36°	30°	
SL-DL-276-10w-R-WHT		6500K				1250 lm		Fulham / Philips			
								Triac / 0-10v / Dali			
SL-DL-276-14w-R-W.WHT	80 / 90	3000K				1540 lm	36-42V@300mA	Aluminium			
SL-DL-276-14w-R-N.WHT		4000K	85	130	φ75	1680 lm		Citizen / Cree / Bridgelux	24° 36°	30°	
SL-DL-276-14w-R-WHT		6500K				1750 lm		Fulham / Philips			
								Triac / 0-10v / Dali			



Beam Angle



Application



On request also available in CCT - 2700K / 3500K / 5000K

RETROFIT LAMP




Available Reflector Finish : Chrome / Rose Gold / White / Black

HECTOR

Indian Module




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-277-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	Housing	Aluminium
SL-DL-277-10w-R-N.WHT		4000K	85	95	φ75	1200 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-277-10w-R-WHT		6500K				1250 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-277-14w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1540 lm	36-42V@300mA	Housing	Aluminium
SL-DL-277-14w-R-N.WHT		4000K	85	115	φ75	1680 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-277-14w-R-WHT		6500K				1750 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali

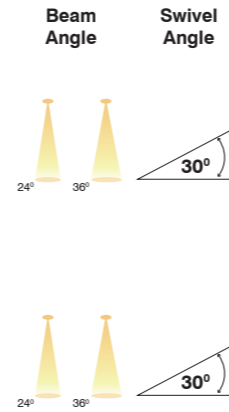

On request also available in CCT - 2700K / 3500K / 5000K

RETROFIT LAMP

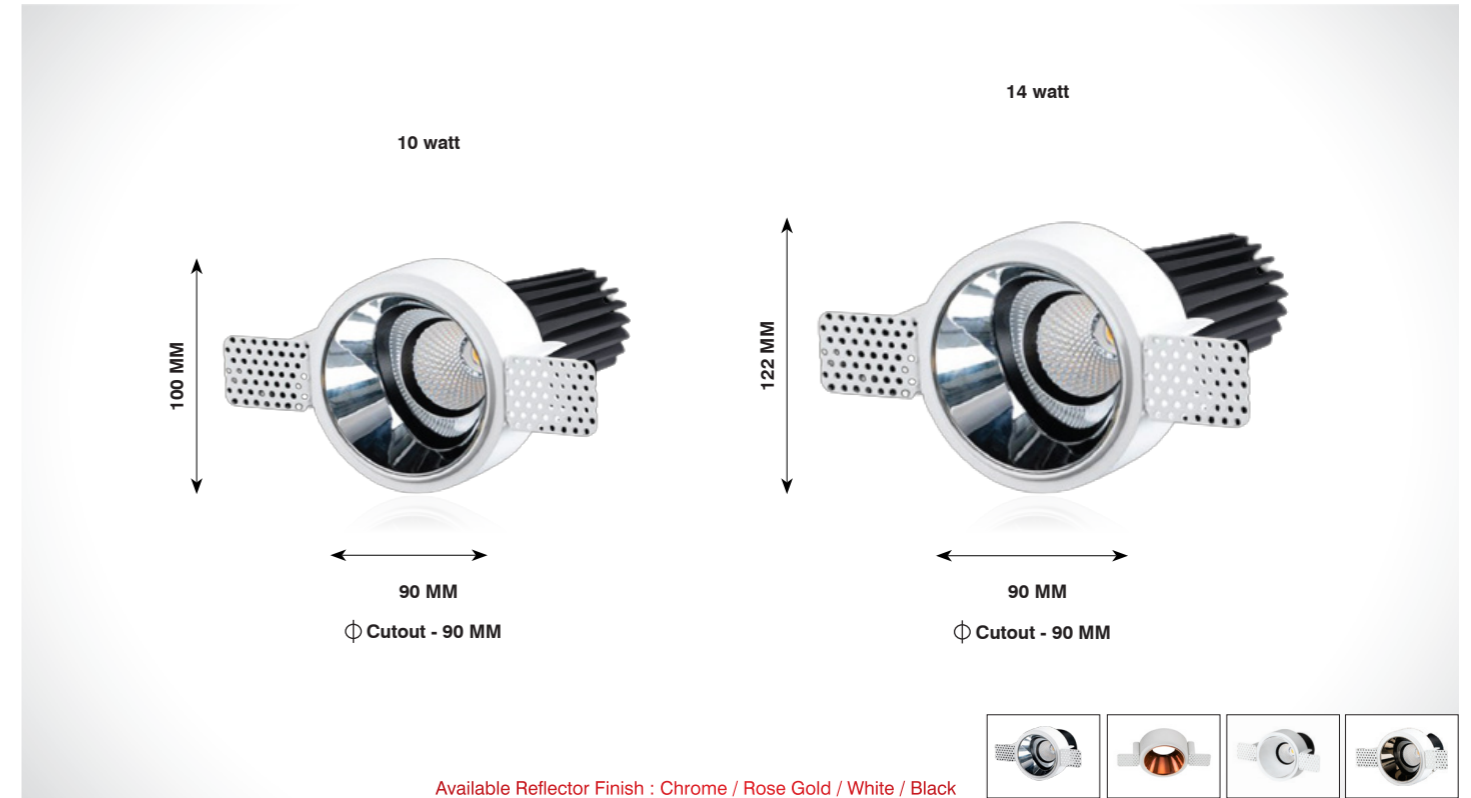


Available Reflector Finish : Chrome / Rose Gold / White / Black

BORIS

Indian Module




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-278-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	Housing	Aluminium
SL-DL-278-10w-R-N.WHT		4000K	90	100	φ90	1200 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-278-10w-R-WHT		6500K				1250 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-DL-278-14w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1540 lm	36-42V@300mA	Housing	Aluminium
SL-DL-278-14w-R-N.WHT		4000K	90	122	φ90	1680 lm		LED Make	Citizen / Cree / Bridgelux
SL-DL-278-14w-R-WHT		6500K				1750 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali

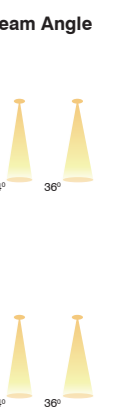


On request also available in CCT - 2700K / 3500K / 5000K

RETROFIT LAMP

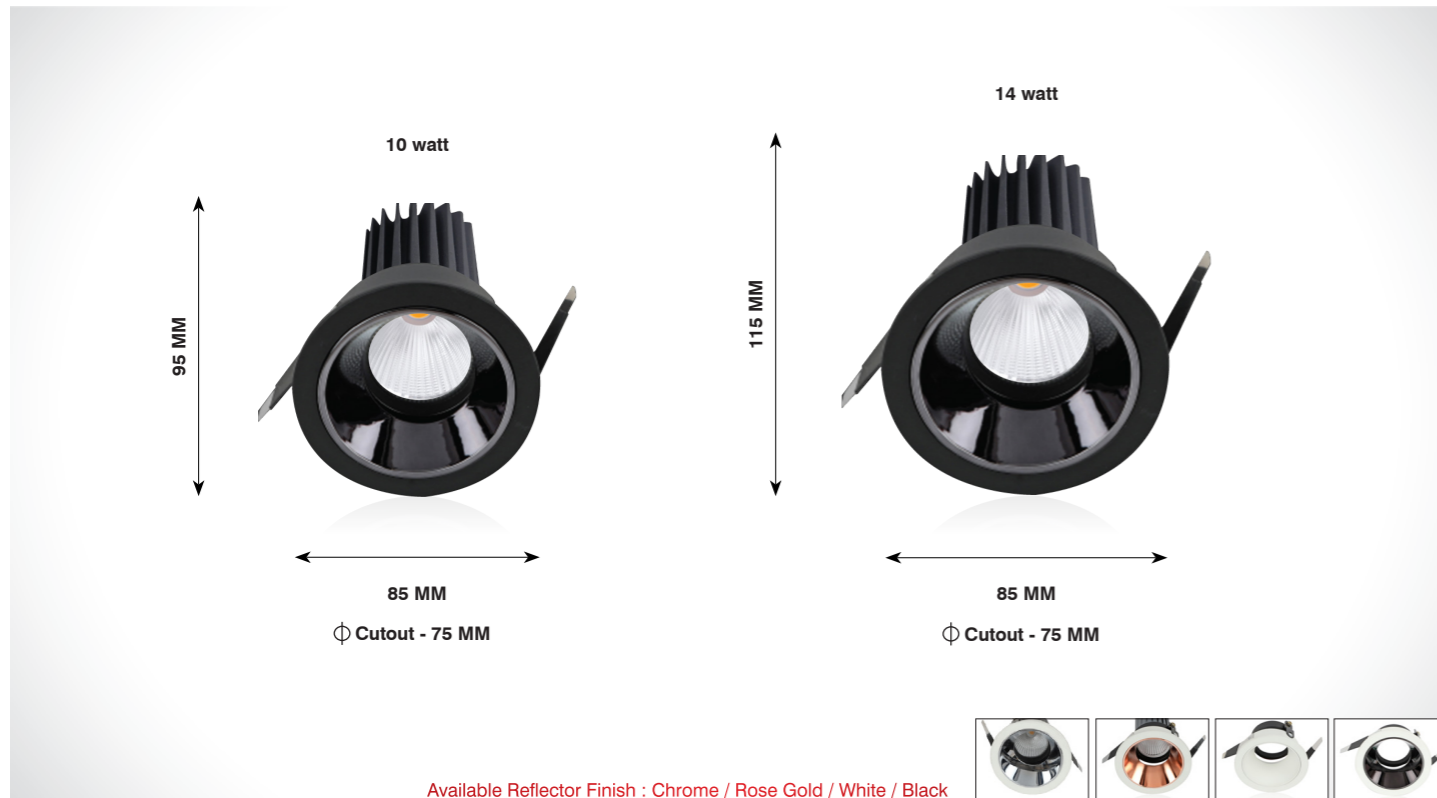

Available Reflector Finish : Chrome / Rose Gold / White / Black



CANISA

Indian Module
(Front Openable)



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs		Beam Angle	Swivel Angle
SL-DL-285-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	Housing	Aluminium		
SL-DL-285-10w-R-N.WHT		4000K	85	95	φ75	1200 lm		LED Make	Citizen / Cree / Bridgelux		
SL-DL-285-10w-R-WHT		6500K				1250 lm		Driver Brands	Fulham / Philips		
								Dimming	Triac / 0-10v / Dali		
SL-DL-285-14w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1540 lm	36-42V@300mA	Housing	Aluminium		
SL-DL-285-14w-R-N.WHT		4000K	85	115	φ75	1680 lm		LED Make	Citizen / Cree / Bridgelux		
SL-DL-285-14w-R-WHT		6500K				1750 lm		Driver Brands	Fulham / Philips		
								Dimming	Triac / 0-10v / Dali		

On request also available in CCT - 2700K / 3500K / 5000K

RETROFIT LAMP



Available Reflector Finish : Chrome / Rose Gold / White / Black



RIO



Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs		Beam Angle	Swivel Angle
SL-LP-215-6w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	660 lm	36-42V@150mA	Housing	Aluminium		
SL-LP-215-6w-R-N.WHT		4000K	80	65	φ70	720 lm		LED Make	Cree		
SL-LP-215-6w-R-WHT		6500K				750 lm		Driver Brands	Philips		
								Dimming	Triac / 0-10v / Dali		

ROSA

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs		Beam Angle	Swivel Angle
SL-LP-216-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	Housing	Aluminium		
SL-LP-216-10w-R-N.WHT		4000K	80	85	φ70	1200 lm		LED Make	Citizen / Cree / Bridgelux		
SL-LP-216-10w-R-WHT		6500K				1250 lm		Driver Brands	Fulham / Philips		
								Dimming	Triac / 0-10v / Dali		

RUFI

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs		Beam Angle	Swivel Angle
SL-LP-217-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1650 lm	36-42V@350mA	Housing	Aluminium		
SL-LP-217-15w-R-N.WHT		4000K	80	95	φ70	1800 lm		LED Make	Citizen / Cree / Bridgelux		
SL-LP-217-15w-R-WHT		6500K				1875 lm		Driver Brands	Fulham / Philips		
								Dimming	Triac / 0-10v / Dali		

On request also available in CCT - 2700K / 3500K / 5000K

RETROFIT LAMP






SANTOS



Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-LP-157-9w-R-W.WHT	80 / 90	3000K	Diameter	Height	990 lm	36-42V@200mA	Housing	Aluminium
SL-LP-157-9w-R-N.WHT		4000K	50	60	1080 lm		LED Make	Citizen / Cree / Bridgelux
SL-LP-157-9w-R-WHT		6500K			1125 lm		Driver Brands	Philips
							Dimming	Triac / 0-10v / Dali
SL-LP-120-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	1100 lm	36-42V@250mA	Housing	Aluminium
SL-LP-120-10w-R-N.WHT		4000K	50	60	1200 lm		LED Make	Citizen / Cree / Bridgelux
SL-LP-120-10w-R-WHT		6500K			1250 lm		Driver Brands	Fulham / Philips
							Dimming	Triac / 0-10v / Dali
SL-LP-125-14w-R-W.WHT	80 / 90	3000K	Diameter	Height	1540 lm	36-42V@300mA	Housing	Aluminium
SL-LP-125-14w-R-N.WHT		4000K	50	85	1680 lm		LED Make	Citizen / Cree / Bridgelux
SL-LP-125-14w-R-WHT		6500K			1750 lm		Driver Brands	Fulham / Philips
							Dimming	Triac / 0-10v / Dali

Beam Angle



On request also available in CCT - 2700K / 3500K / 5000K



RETROFIT LAMP



Available Reflector Finish : Chrome / Rose Gold / White / Black





MARINA / MISHA





Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-LP-205-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	Housing	Aluminium
SL-LP-205-10w-R-N.WHT		4000K	80	95	φ70	1200 lm		LED Make	Citizen / Cree / Bridgelux
SL-LP-205-10w-R-WHT		6500K				1250 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali
SL-LP-205-14w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1540 lm	36-42V@300mA	Housing	Aluminium
SL-LP-205-14w-R-N.WHT		4000K	80	120	φ70	1680 lm		LED Make	Citizen / Cree / Bridgelux
SL-LP-205-14w-R-WHT		6500K				1750 lm		Driver Brands	Fulham / Philips
								Dimming	Triac / 0-10v / Dali

Beam Angle




Swivel Angle



On request also available in CCT - 2700K / 3500K / 5000K



RETROFIT LAMPS SERIES

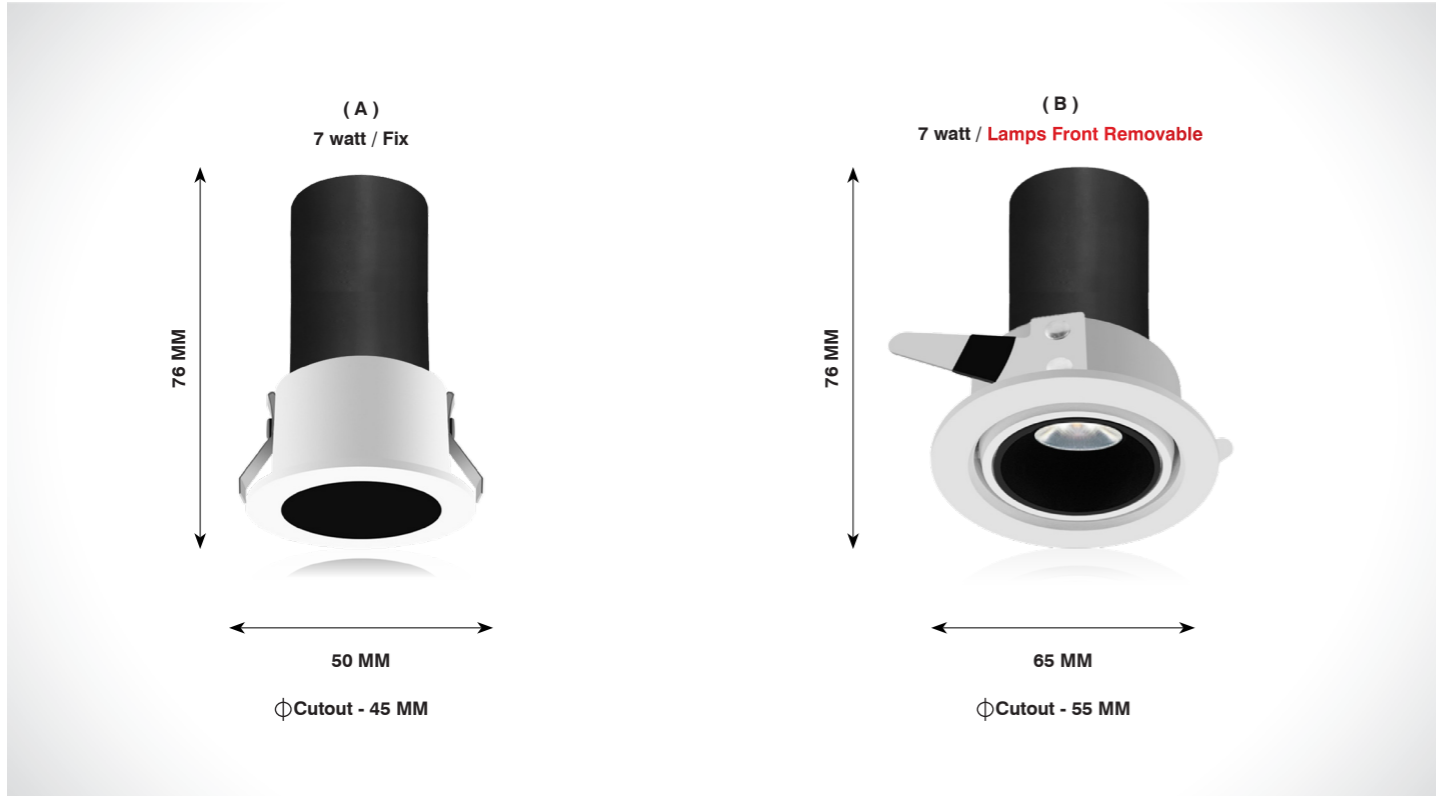

TENZA A

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-328-7w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	770 lm	36-42V@150mA	Housing	Aluminium
SL-DL-328-7w-R-N.WHT		4000K	50	76	Ø45	840 lm		LED Make	Cree
SL-DL-328-7w-R-WHT		6500K				875 lm		Driver Brands	Philips
								Dimming	Triac / 0-10v / Dali




TENZA B

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-329-7w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	770 lm	36-42V@150mA	Housing	Aluminium
SL-DL-329-7w-R-N.WHT		4000K	65	76	Ø55	840 lm		LED Make	Cree
SL-DL-329-7w-R-WHT		6500K				875 lm		Driver Brands	Philips
								Dimming	Triac / 0-10v / Dali



RETROFIT LAMPS SERIES

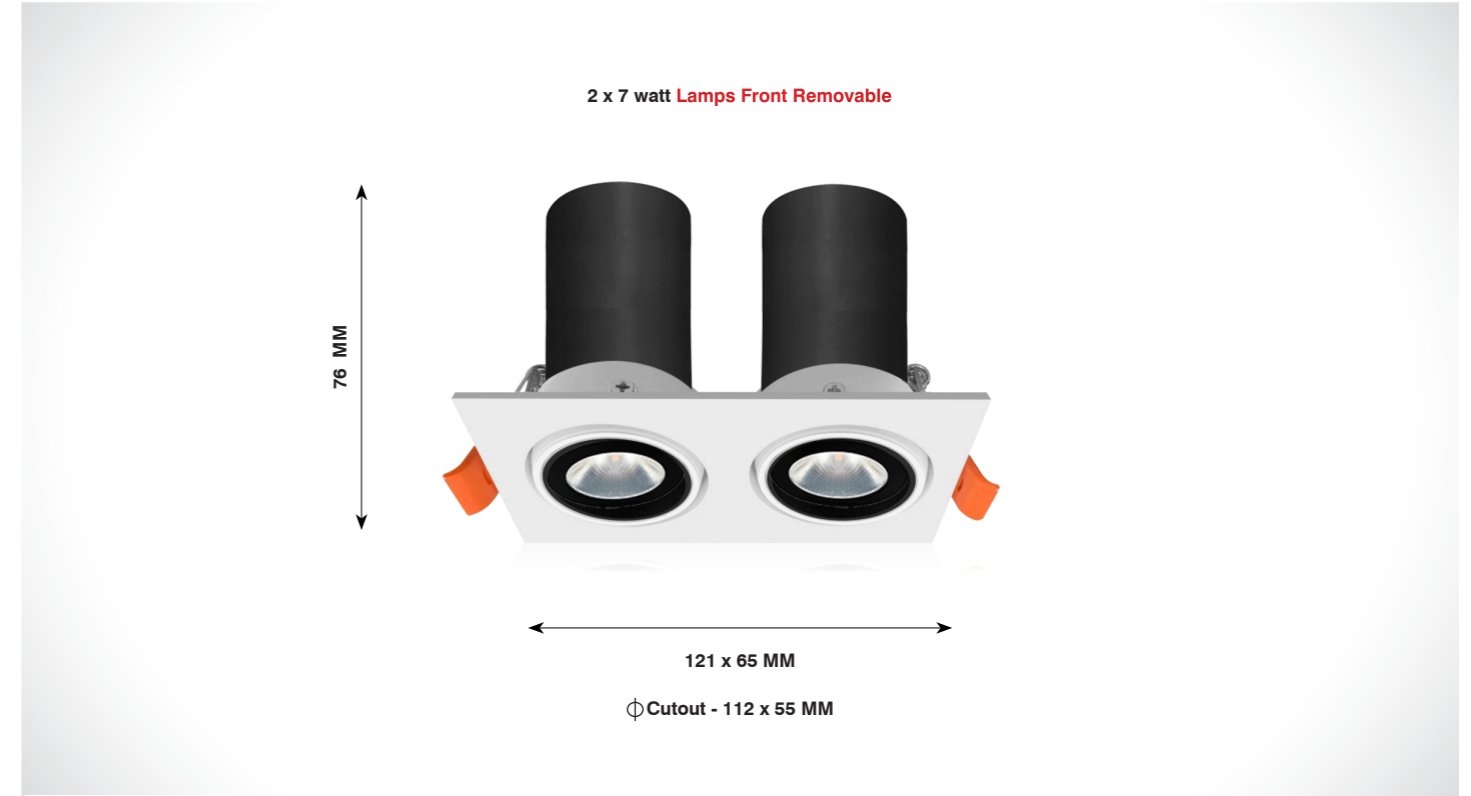


JORJE

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-DL-330-2x7w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1540 lm	36-42V@300mA	Housing	Aluminium
SL-DL-330-2x7w-R-N.WHT		4000K	121x65	35	Ø112 x 55	1680 lm		LED Make	Cree
SL-DL-330-2x7w-R-WHT		6500K				1750 lm		Driver Brands	Philips
								Dimming	Triac / 0-10v / Dali



ADJUSTABLE LASER BLADE

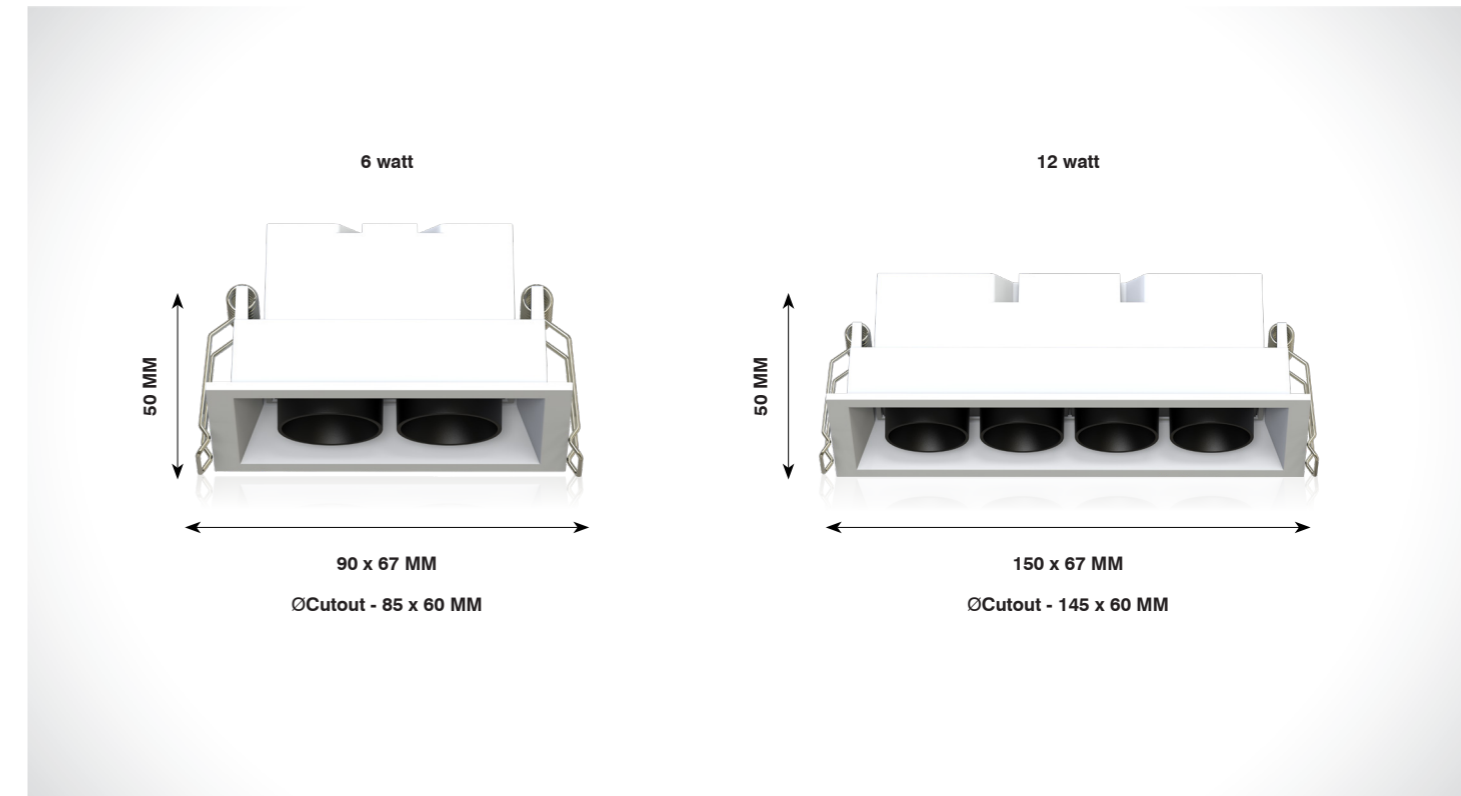

Available Body Colour : White Body & Inside Black



LASER BLADE SERIES

ROVIGO

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-LB-326-6w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	660 lm	7-12V@700mA	Housing	Aluminium
SL-LB-326-6w-R-N.WHT		4000K	90x67	50	Ø85x60	720 lm		LED Make	Cree / Osram
SL-LB-326-6w-R-WHT		6500K				750 lm		Driver Brands	Fulham / Osram
								Dimming	Triac / 0-10v / Dali
SL-LB-326-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	11-22V@700mA	Housing	Aluminium
SL-LB-326-12w-R-N.WHT		4000K	150x67	50	Ø145x60	1440 lm		LED Make	Cree / Osram
SL-LB-326-12w-R-WHT		6500K				1500 lm		Driver Brands	Osram / Fulham
								Dimming	Triac / 0-10v / Dali


DIMMABLE

Beam Angle



On request also available in CCT - 2700K / 3500K / 5000K



ADJUSTABLE LASER BLADE

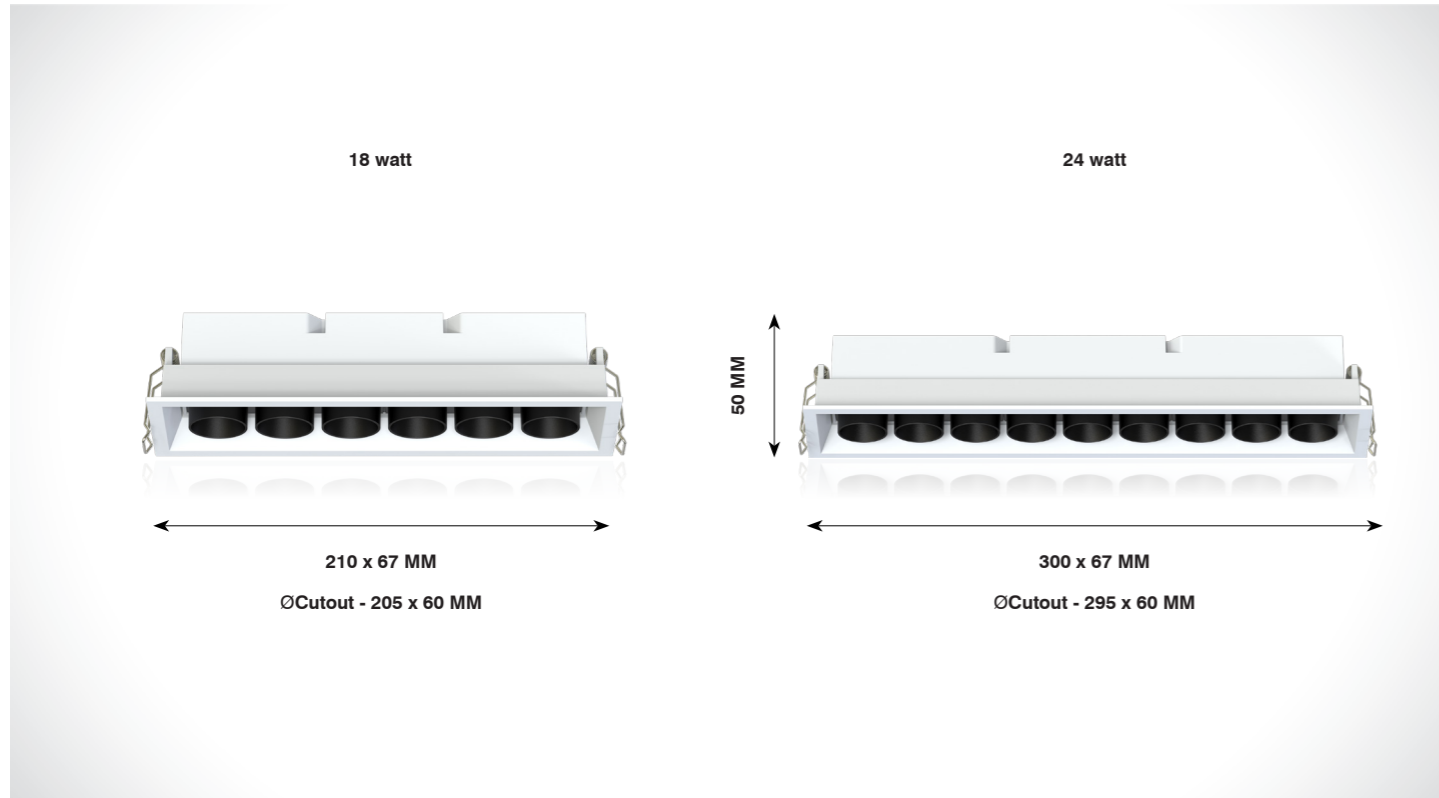


Available Body Colour : White Body & Inside Black

ROVIGO

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-LB-326-18w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1980 lm	18-24V@700mA	Housing	Aluminium
SL-LB-326-18w-R-N.WHT		4000K	210x67	50	Ø205x60	2160 lm		LED Make	Cree / Osram
SL-LB-326-18w-R-WHT		6500K				2250 lm		Driver Brands	Osram / Fulham
								Dimming	Triac / 0-10v / Dali
SL-LB-326-24w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	2640 lm	27-32V@700mA	Housing	Aluminium
SL-LB-326-24w-R-N.WHT		4000K	300x67	50	Ø295x60	2880 lm		LED Make	Cree / Osram
SL-LB-326-24w-R-WHT		6500K				3000 lm		Driver Brands	Osram / Fulham
								Dimming	Triac / 0-10v / Dali






LASER BLADE

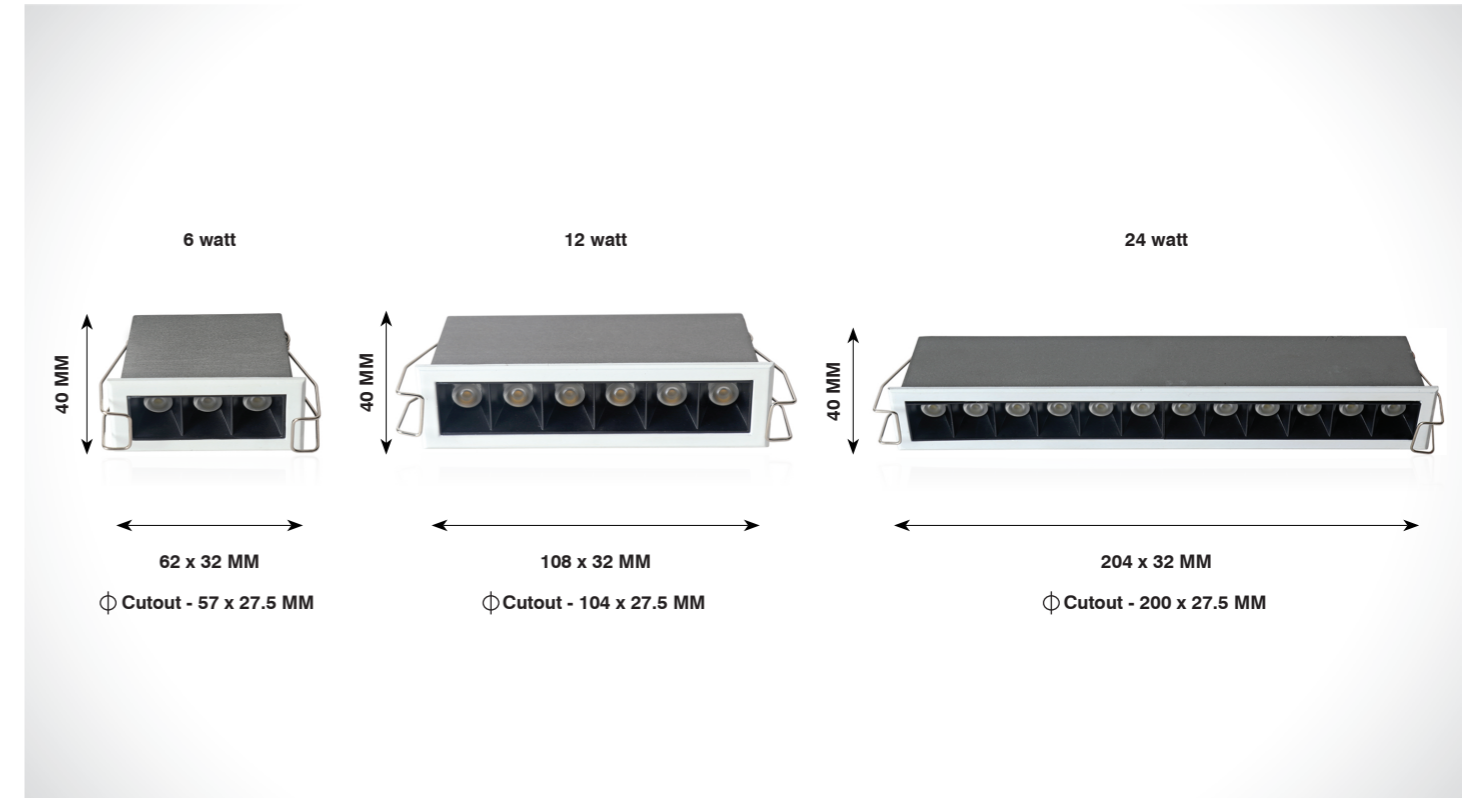


SLIM-PERLA

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-LB-228-6w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	660 lm	7-12V@700mA	Housing	Aluminium
SL-LB-228-6w-R-N.WHT		4000K	62 x 32	40	φ57x27.5	720 lm		LED Make	Osram
SL-LB-228-6w-R-WHT		6500K				750 lm		Driver Brands	Fulham
								Dimming	Triac / 0-10v / Dali
SL-LB-228-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	11-22V@700mA	Housing	Aluminium
SL-LB-228-12w-R-N.WHT		4000K	108 x 32	40	φ104x27.5	1440 lm		LED Make	Osram
SL-LB-228-12w-R-WHT		6500K				1500 lm		Driver Brands	Osram / Fulham
								Dimming	Triac / 0-10v / Dali
SL-LB-228-24w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1320 lm	27-42V@600mA	Housing	Aluminium
SL-LB-228-24w-R-N.WHT		4000K	204 x 32	40	φ200x27.5	1440 lm		LED Make	Osram
SL-LB-228-24w-R-WHT		6500K				1500 lm		Driver Brands	Osram / Fulham
								Dimming	Triac / 0-10v / Dali




LASER BLADE

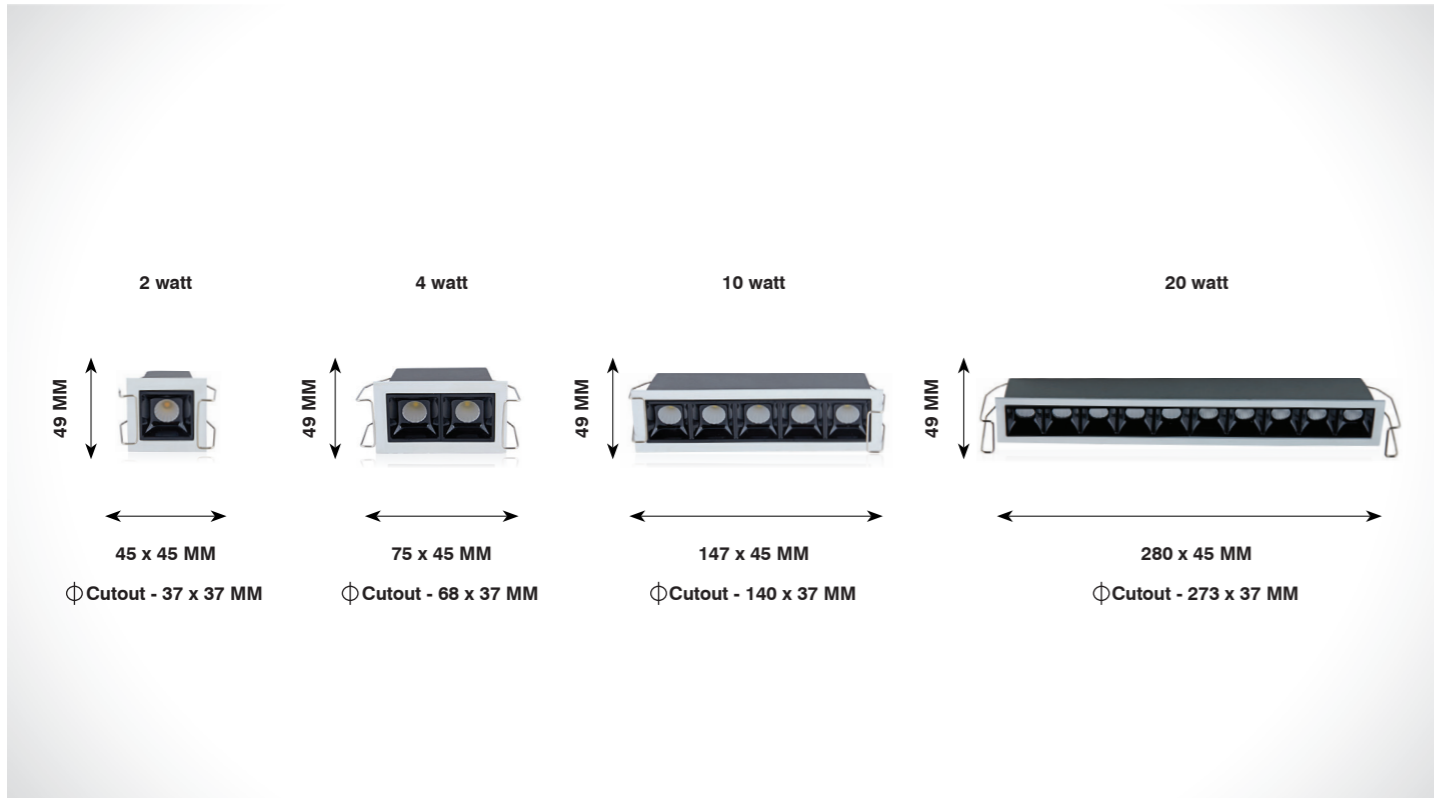

PERLA

Product Code	CRI	CCT	Dimension (in mm)	Lumen	Driver Opt	System Specs
SL-LB-250-2w-R-W.WHT	80 / 90	3000K	Diameter Height Cutout	220 lm	3-10V@700mA	Housing Aluminium
SL-LB-250-2w-R-N.WHT		4000K	45 x 45 49 φ 37 x 37	240 lm		LED Make Osram
SL-LB-250-2w-R-WHT		6500K		250 lm		Driver Brands Srishti
						Dimming Triac / 0-10v / Dali
SL-LB-250-4w-R-W.WHT	80 / 90	3000K	Diameter Height Cutout	440 lm	3-10V@700mA	Housing Aluminium
SL-LB-250-4w-R-N.WHT		4000K	75 x 45 49 φ 68 x 37	480 lm		LED Make Osram
SL-LB-250-4w-R-WHT		6500K		500 lm		Driver Brands Srishti
						Dimming Triac / 0-10v / Dali
SL-LB-250-10w-R-W.WHT	80 / 90	3000K	Diameter Height Cutout	1100 lm	11-22V@700mA	Housing Aluminium
SL-LB-250-10w-R-N.WHT		4000K	147 x 45 49 φ140 x 37	1200 lm		LED Make Osram
SL-LB-250-10w-R-WHT		6500K		1250 lm		Driver Brands Osram
						Dimming Triac / 0-10v / Dali
SL-LB-250-20w-R-W.WHT	80 / 90	3000K	Diameter Height Cutout	2200 lm	27-42V@600mA	Housing Aluminium
SL-LB-250-20w-R-N.WHT		4000K	280 x 45 49 φ273 x 37	2400 lm		LED Make Osram
SL-LB-250-20w-R-WHT		6500K		2500 lm		Driver Brands Osram / Fulham
						Dimming Triac / 0-10v / Dali

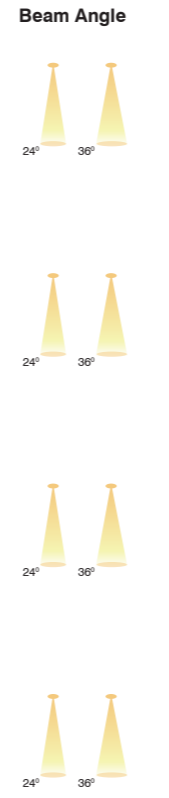


Application




On request also available in CCT - 2700K / 3500K / 5000K

LASER BLADE

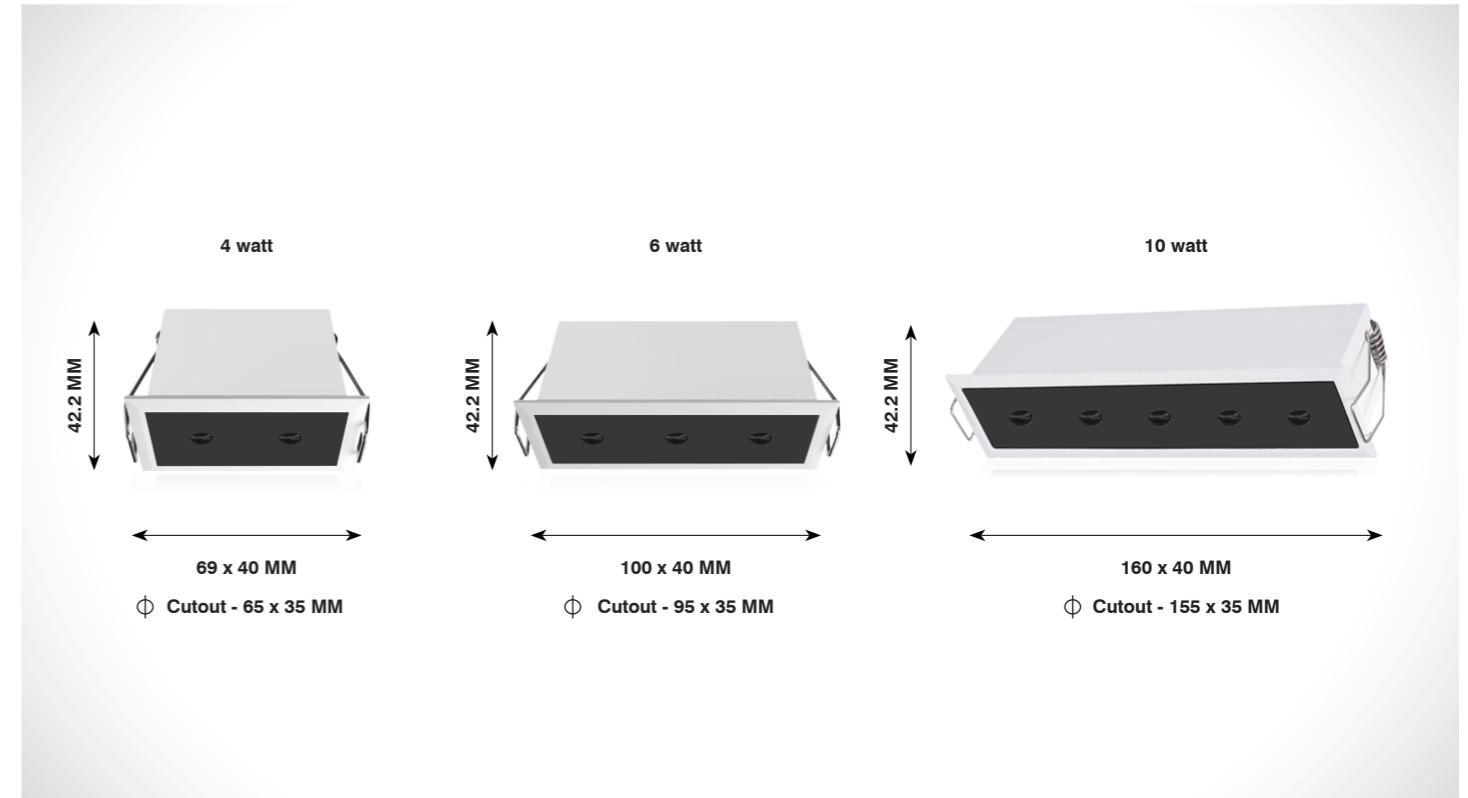

LABIB

Product Code	CRI	CCT	Dimension (in mm)	Lumen	Driver Opt	System Specs
SL-LB-286-4w-R-W.WHT	80 / 90	3000K	Diameter Height Cutout	440 lm	3-3.6 VDC@700mA	Housing Aluminium
SL-LB-286-4w-R-N.WHT		4000K	69 x 40 42.2 φ 65 x 35	480 lm		LED Make Osram
SL-LB-286-4w-R-WHT		6500K		500 lm		Driver Brands Srishti
						Dimming Triac / 0-10v / Dali
SL-LB-286-6w-R-W.WHT	80 / 90	3000K	Diameter Height Cutout	660 lm	7-12 VDC@700mA	Housing Aluminium
SL-LB-286-6w-R-N.WHT		4000K	100 x 40 42.2 φ 95 x 35	720 lm		LED Make Osram
SL-LB-286-6w-R-WHT		6500K		750 lm		Driver Brands Osram / Fulham
						Dimming Triac / 0-10v / Dali
SL-LB-286-10w-R-W.WHT	80 / 90	3000K	Diameter Height Cutout	1100 lm	8-15V@700mA	Housing Aluminium
SL-LB-286-10w-R-N.WHT		4000K	160 x 40 42.2 φ155 x 35	1200 lm		LED Make Osram
SL-LB-286-10w-R-WHT		6500K		1250 lm		Driver Brands Osram / Fulham
						Dimming Triac / 0-10v / Dali

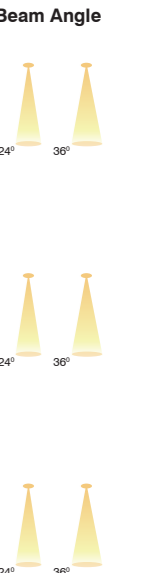

Application



On request also available in CCT - 2700K / 3500K / 5000K

LASER BLADE



AZUL


Wall Washer

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-LB-259-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	1100 lm	9-16 VDC@700mA	Housing	Aluminium
SL-LB-259-10w-R-N.WHT		4000K	147 x 45	49	∅140 x 37	1200 lm		LED Make	Osram
SL-LB-259-10w-R-WHT		6500K				1250 lm		Driver Brands	Osram / Fulham
								Dimming	Triac / 0-10v / Dali



On request also available in CCT - 2700K / 3500K / 5000K

LASER BLADE

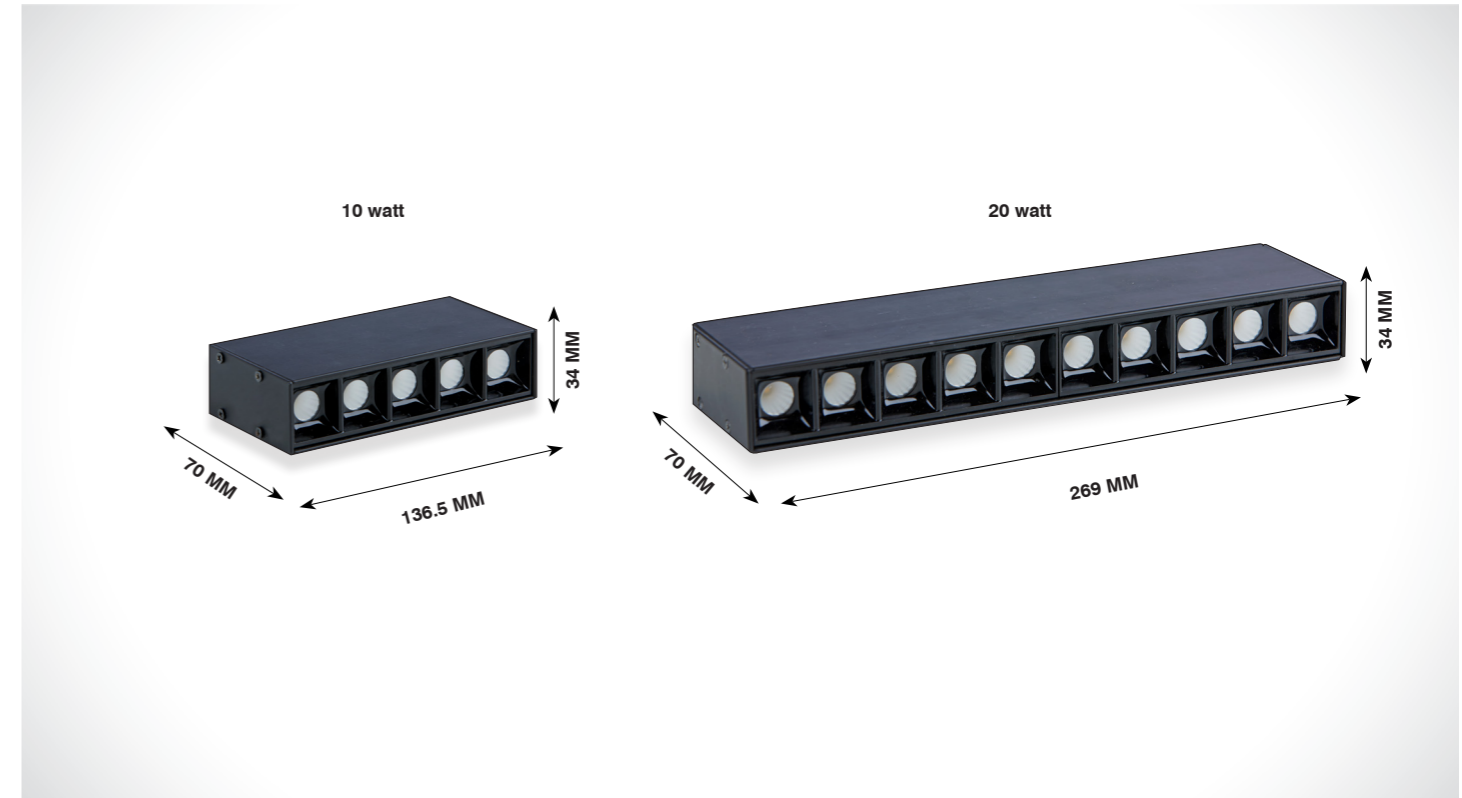

CANTO

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-SLB-249-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	1100 lm	9-16 VDC@700mA	Housing	Aluminium
SL-SLB-249-10w-R-N.WHT		4000K	136.5 x 34	70	1200 lm		LED Make	Osram
SL-SLB-249-10w-R-WHT		6500K			1250 lm		Driver Brands	Srishti
							Dimming	Triac / 0-10v / Dali
SL-SLB-249-20w-R-W.WHT	80 / 90	3000K	Diameter	Height	2200 lm	25-35 VDC@600mA	Housing	Aluminium
SL-SLB-249-20w-R-N.WHT		4000K	269 x 34	70	2400 lm		LED Make	Osram
SL-SLB-249-20w-R-WHT		6500K			2500 lm		Driver Brands	Srishti
							Dimming	Triac / 0-10v / Dali



On request also available in CCT - 2700K / 3500K / 5000K



SURFACE DOWN LIGHT SERIES



SURFACE DOWN LIGHT



ROBE

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-SDL-86-10w-R-W.WHT	80 / 90	3000K	Diameter	Height	1100 lm	36-42V@250mA	Housing	Aluminium
SL-SDL-86-10w-R-N.WHT		4000K	117	115	1200 lm		LED Make	Citizen / Cree / Bridgelux
SL-SDL-86-10w-R-WHT		6500K			1250 lm		Driver Brands	Srishti
SL-SDL-86-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	1650 lm	36-42V@350mA	Housing	Aluminium
SL-SDL-86-15w-R-N.WHT		4000K	117	115	1800 lm		LED Make	Citizen / Cree / Bridgelux
SL-SDL-86-15w-R-WHT		6500K			1875 lm		Driver Brands	Srishti

Beam Angle



On request also available in CCT - 2700K / 3500K / 5000K

SURFACE DOWN LIGHT







SURFACE DOWN LIGHT



MENTOR

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-SDL-236-7w-R-W.WHT	80 / 90	3000K	Diameter	Height	770 lm	36-42V@150mA	Housing	Aluminium
SL-SDL-236-7w-R-N.WHT		4000K	55	75	840 lm		LED Make	Citizen / Cree / Bridgelux
SL-SDL-236-7w-R-WHT		6500K			875 lm		Driver Brands	Srishti
SL-SDL-221-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	1320 lm	36-42V@300mA	Housing	Aluminium
SL-SDL-221-12w-R-N.WHT		4000K	74	100	1440 lm		LED Make	Citizen / Cree / Bridgelux
SL-SDL-221-12w-R-WHT		6500K			1500 lm		Driver Brands	Srishti
SL-SDL-222-20w-R-W.WHT	80 / 90	3000K	Diameter	Height	2200 lm	36-42V@400mA	Housing	Aluminium
SL-SDL-222-20w-R-N.WHT		4000K	94	113	2400 lm		LED Make	Citizen / Cree / Bridgelux
SL-SDL-222-20w-R-WHT		6500K			2500 lm		Driver Brands	Srishti
SL-SDL-223-30w-R-W.WHT	80 / 90	3000K	Diameter	Height	3300 lm	36-42V@750mA	Housing	Aluminium
SL-SDL-223-30w-R-N.WHT		4000K	115	125	3600 lm		LED Make	Citizen / Cree / Bridgelux
SL-SDL-223-30w-R-WHT		6500K			3750 lm		Driver Brands	Srishti

Beam Angle



Application





On request also available in CCT - 2700K / 3500K / 5000K

SIMBAR

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-SDL-237-7w-R-W.WHT	80 / 90	3000K	Diameter	Height	770 lm	36-42V@150mA	Housing	Aluminium
SL-SDL-237-7w-R-N.WHT		4000K	55	75	840 lm		LED Make	Citizen / Cree / Bridgelux
SL-SDL-237-7w-R-WHT		6500K			875 lm		Driver Brands	Srishti
SL-SDL-224-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	1320 lm	36-42V@300mA	Housing	Aluminium
SL-SDL-224-12w-R-N.WHT		4000K	74	100	1440 lm		LED Make	Citizen / Cree / Bridgelux
SL-SDL-224-12w-R-WHT		6500K			1500 lm		Driver Brands	Srishti
SL-SDL-225-20w-R-W.WHT	80 / 90	3000K	Diameter	Height	2200 lm	36-42V@400mA	Housing	Aluminium
SL-SDL-225-20w-R-N.WHT		4000K	94	113	2400 lm		LED Make	Citizen / Cree / Bridgelux
SL-SDL-225-20w-R-WHT		6500K			2500 lm		Driver Brands	Srishti
SL-SDL-226-30w-R-W.WHT	80 / 90	3000K	Diameter	Height	3300 lm	36-42V@750mA	Housing	Aluminium
SL-SDL-226-30w-R-N.WHT		4000K	115	125	3600 lm		LED Make	Citizen / Cree / Bridgelux
SL-SDL-226-30w-R-WHT		6500K			3750 lm		Driver Brands	Srishti

Beam Angle




Application



On request also available in CCT - 2700K / 3500K / 5000K



SURFACE DOWN LIGHT

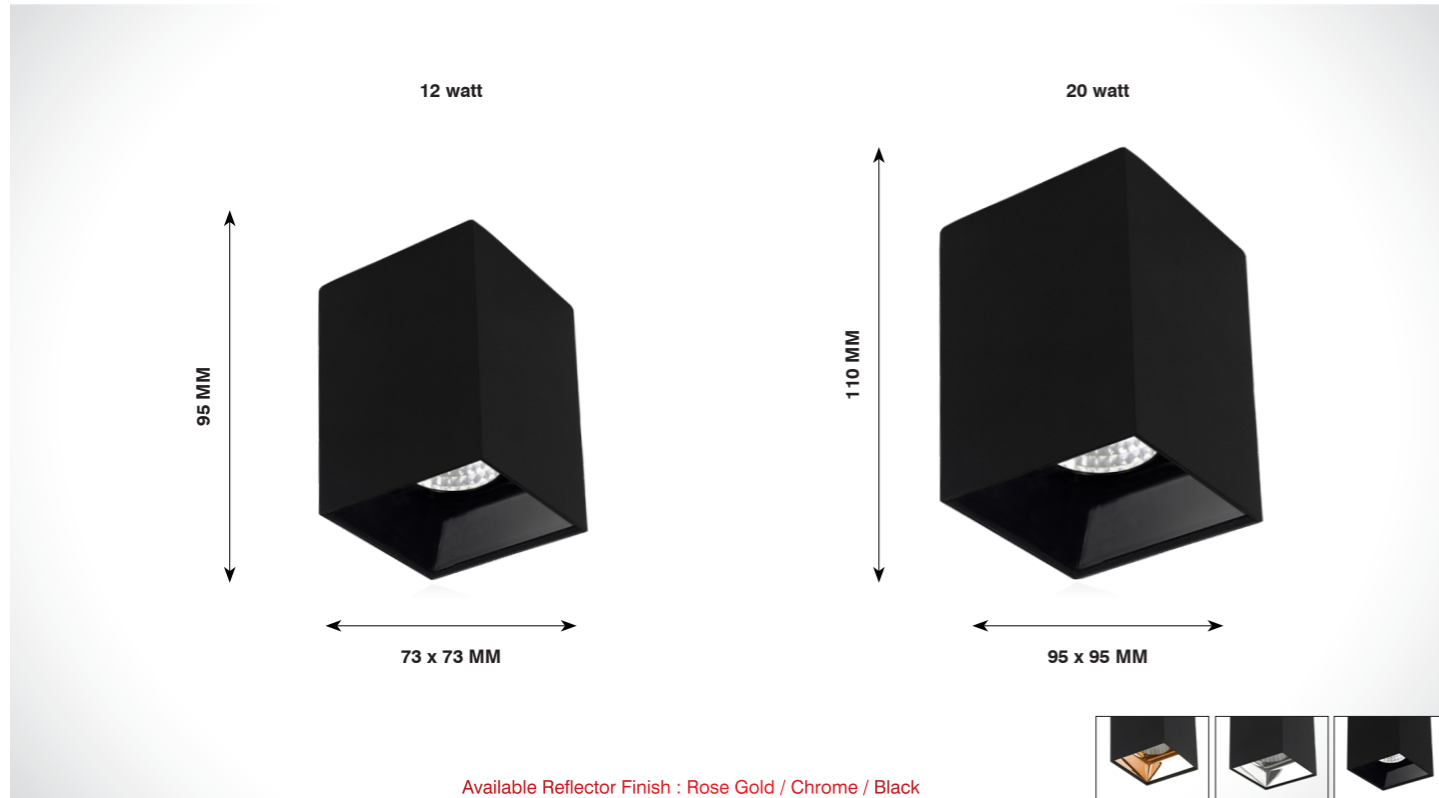


PALLAS

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-SDL-245-12w-S-W.WHT	80 / 90	3000K	Diameter	Height	1320 lm	36-42V@300mA	Housing	Aluminium
SL-SDL-245-12w-S-N.WHT		4000K	73 x 73	95	1440 lm		LED Make	Citizen / Cree / Bridgelux
SL-SDL-245-12w-S-WHT		6500K			1500 lm		Driver Brands	Srishti
SL-SDL-246-20w-S-W.WHT	80 / 90	3000K	Diameter	Height	2200 lm	36-42V@400mA	Housing	Aluminium
SL-SDL-246-20w-S-N.WHT		4000K	95 x 95	110	2400 lm		LED Make	Citizen / Cree / Bridgelux
SL-SDL-246-20w-S-WHT		6500K			2500 lm		Driver Brands	Srishti

Beam Angle





SURFACE DOWN LIGHT

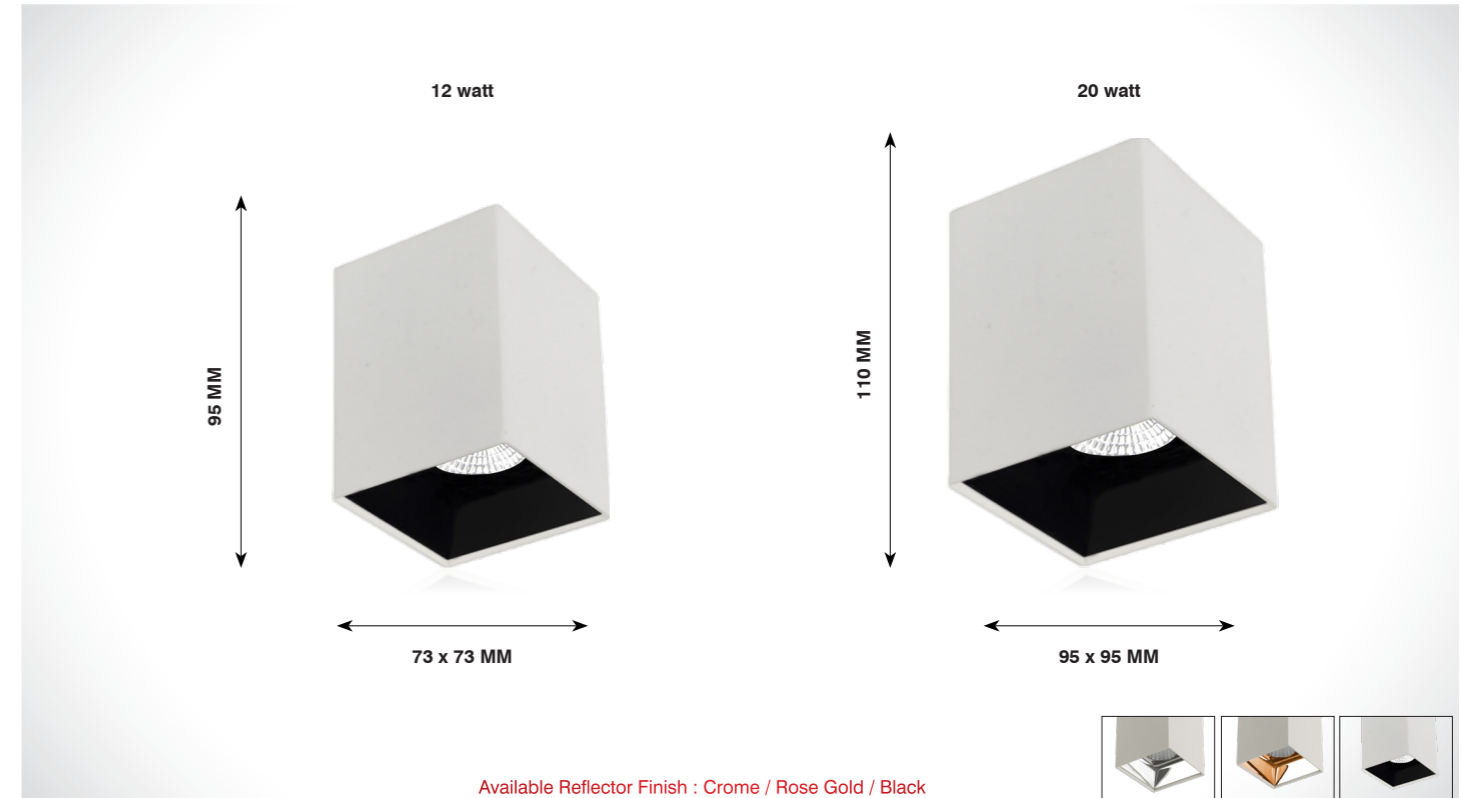


SOLON

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-SDL-247-12w-S-W.WHT	80 / 90	3000K	Diameter	Height	1320 lm	36-42V@300mA	Housing	Aluminium
SL-SDL-247-12w-S-N.WHT		4000K	73 x 73	95	1440 lm		LED Make	Citizen / Cree / Bridgelux
SL-SDL-247-12w-S-WHT		6500K			1500 lm		Driver Brands	Srishti
SL-SDL-248-20w-S-W.WHT	80 / 90	3000K	Diameter	Height	2200 lm	36-42V@400mA	Housing	Aluminium
SL-SDL-248-20w-S-N.WHT		4000K	95 x 95	110	2400 lm		LED Make	Citizen / Cree / Bridgelux
SL-SDL-248-20w-S-WHT		6500K			2500 lm		Driver Brands	Srishti

Beam Angle



ZOOM LIGHT

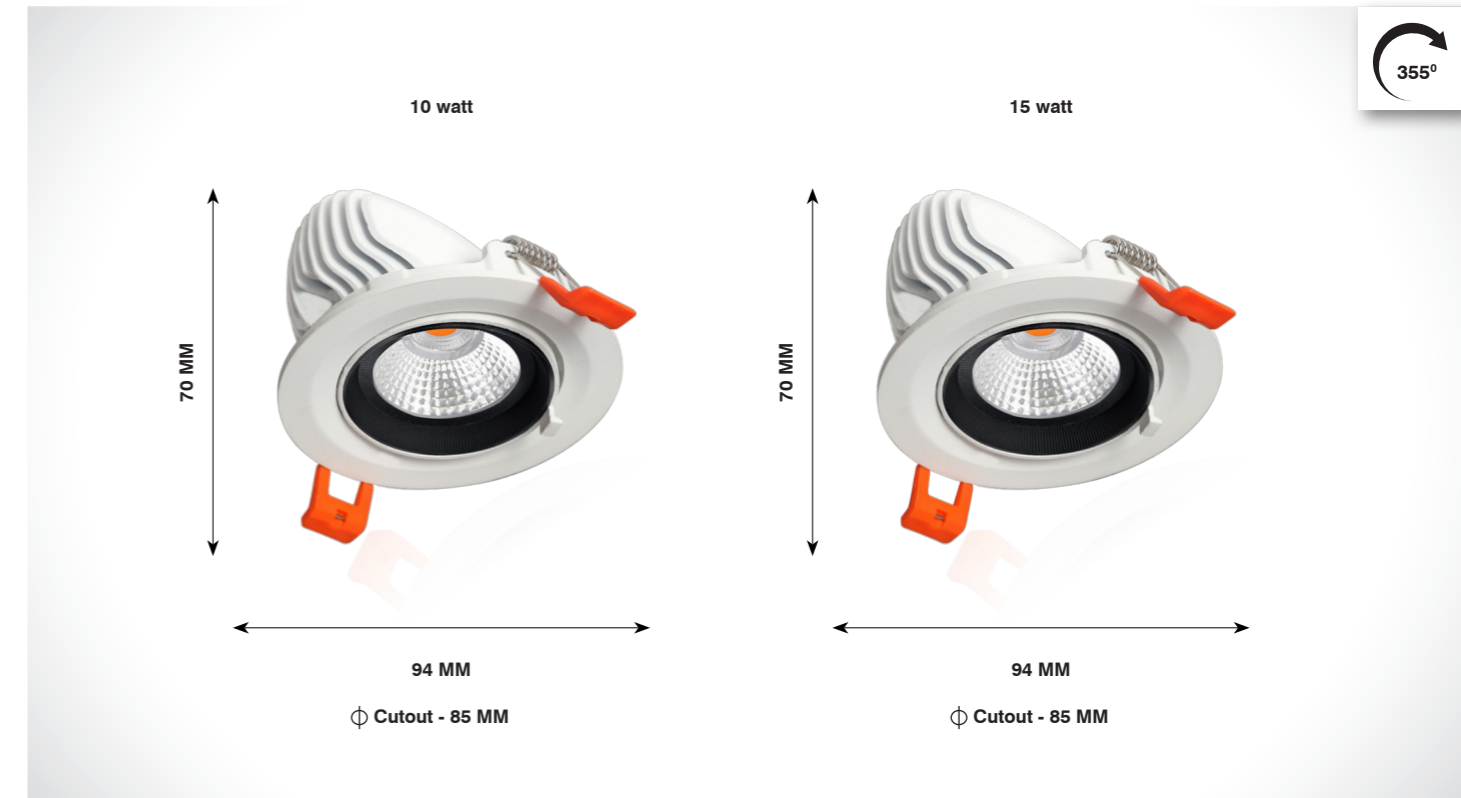


ZOOM LIGHT SERIES



ALMIRA




Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
			Diameter	Height	Cutout			Housing	LED Make
SL-ZL-159-10w-R-W.WHT	80 / 90	3000K	94	70	φ 85	1100 lm	36-42V@250mA	Aluminium	Citizen / Cree / Bridgelux
SL-ZL-159-10w-R-N.WHT		4000K				1200 lm		Philips	
SL-ZL-159-10w-R-WHT		6500K				1250 lm		Triac / 0-10v / Dali	
SL-ZL-159-15w-R-W.WHT	80 / 90	3000K	94	70	φ 85	1650 lm	36-42V@300mA	Aluminium	Citizen / Cree / Bridgelux
SL-ZL-159-15w-R-N.WHT		4000K				1800 lm		Philips	
SL-ZL-159-15w-R-WHT		6500K				1875 lm		Triac / 0-10v / Dali	

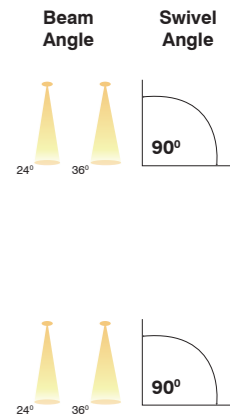





On request also available in CCT - 2700K / 3500K / 5000K

ZOOM LIGHT

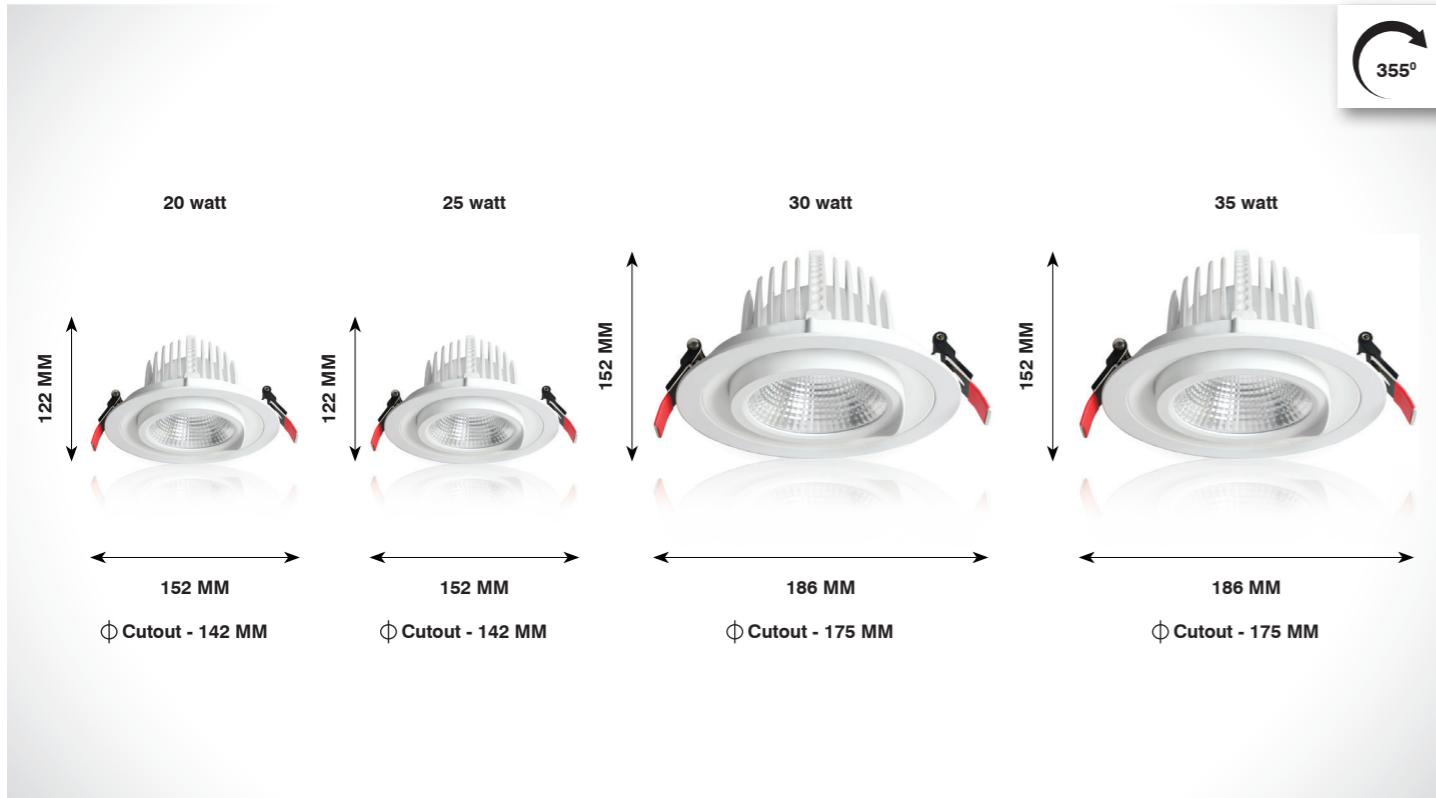

FOTIS

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-ZL-256-20w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	2200 lm	36-42V@500mA	Housing	Aluminium
SL-ZL-256-20w-R-N.WHT		4000K	152	122	ϕ 142	2400 lm		LED Make	Citizen / Cree / Bridgelux
SL-ZL-256-20w-R-WHT		6500K				2500 lm		Driver Brands	Fulham
								Dimming	Triac / 0-10v / Dali
SL-ZL-256-25w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	2750 lm	36-42V@700mA	Housing	Aluminium
SL-ZL-256-25w-R-N.WHT		4000K	152	122	ϕ 142	3000 lm		LED Make	Citizen / Cree / Bridgelux
SL-ZL-256-25w-R-WHT		6500K				3125 lm		Driver Brands	Fulham
								Dimming	Triac / 0-10v / Dali
SL-ZL-256-30w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	3300 lm	36-42V@750mA	Housing	Aluminium
SL-ZL-256-30w-R-N.WHT		4000K	186	152	ϕ 175	3600 lm		LED Make	Citizen / Cree / Bridgelux
SL-ZL-256-30w-R-WHT		6500K				3750 lm		Driver Brands	Fulham
								Dimming	Triac / 0-10v / Dali
SL-ZL-256-35w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	3850 lm	36-42V@800mA	Housing	Aluminium
SL-ZL-256-35w-R-N.WHT		4000K	186	152	ϕ 175	4200 lm		LED Make	Citizen / Cree / Bridgelux
SL-ZL-256-35w-R-WHT		6500K				4375 lm		Driver Brands	Fulham
								Dimming	Triac / 0-10v / Dali



Application



On request also available in CCT - 2700K / 3500K / 5000K



TRACK LIGHT SERIES

TRACKSPOT



SAPPHIRE

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-ZL-117-20w-R-W.WHT	80 / 90	3000K	Diameter	Height	2200 lm	36-42V@500mA	Housing	Aluminium
SL-ZL-117-20w-R-N.WHT		4000K	90	245	2400 lm		LED Make	Citizen / Cree / Bridgelux
SL-ZL-117-20w-R-WHT		6500K			2500 lm		Driver Brands	Fulham
							Dimming	Triac / 0-10v / Dali
SL-ZL-117-25w-R-W.WHT	80 / 90	3000K	Diameter	Height	2750 lm	36-42V@700mA	Housing	Aluminium
SL-ZL-117-25w-R-N.WHT		4000K	90	245	3000 lm		LED Make	Citizen / Cree / Bridgelux
SL-ZL-117-25w-R-WHT		6500K			3125 lm		Driver Brands	Fulham
							Dimming	Triac / 0-10v / Dali
SL-ZL-117-30w-R-W.WHT	80 / 90	3000K	Diameter	Height	3300 lm	36-42V@750mA	Housing	Aluminium
SL-ZL-117-30w-R-N.WHT		4000K	128	245	3600 lm		LED Make	Citizen / Cree / Bridgelux
SL-ZL-117-30w-R-WHT		6500K			3750 lm		Driver Brands	Fulham
							Dimming	Triac / 0-10v / Dali
SL-ZL-117-35w-R-W.WHT	80 / 90	3000K	Diameter	Height	3850 lm	36-42V@800mA	Housing	Aluminium
SL-ZL-117-35w-R-N.WHT		4000K	128	245	4200 lm		LED Make	Citizen / Cree / Bridgelux
SL-ZL-117-35w-R-WHT		6500K			4375 lm		Driver Brands	Fulham
							Dimming	Triac / 0-10v / Dali



On request also available in CCT - 2700K / 3500K / 5000K



TRACKSPOT



DAWN


Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-TL-160-15w-R-W.WHT	80 / 90	3000K	Diameter	Height	1650 lm	36-42V@350mA	Housing	Aluminium
SL-TL-160-15w-R-N.WHT		4000K	78 x 192		1800 lm		LED Make	Citizen / Cree / Bridgelux
SL-TL-160-15w-R-WHT		6500K			1875 lm		Driver Brands	Fulham
							Dimming	Triac / 0-10v / Dali
SL-TL-160-25w-R-W.WHT	80 / 90	3000K	Diameter	Height	2750 lm	36-42V@700mA	Housing	Aluminium
SL-TL-160-25w-R-N.WHT		4000K	110 x 220		3000 lm		LED Make	Citizen / Cree / Bridgelux
SL-TL-160-25w-R-WHT		6500K			3125 lm		Driver Brands	Fulham
							Dimming	Triac / 0-10v / Dali
SL-TL-160-40w-R-W.WHT	80 / 90	3000K	Diameter	Height	4400 lm	36-42V@850mA	Housing	Aluminium
SL-TL-160-40w-R-N.WHT		4000K	130 x 220		4800 lm		LED Make	Citizen / Cree / Bridgelux
SL-TL-160-40w-R-WHT		6500K			5000 lm		Driver Brands	Fulham
							Dimming	Triac / 0-10v / Dali



On request also available in CCT - 2700K / 3500K / 5000K




TRACKSPOT

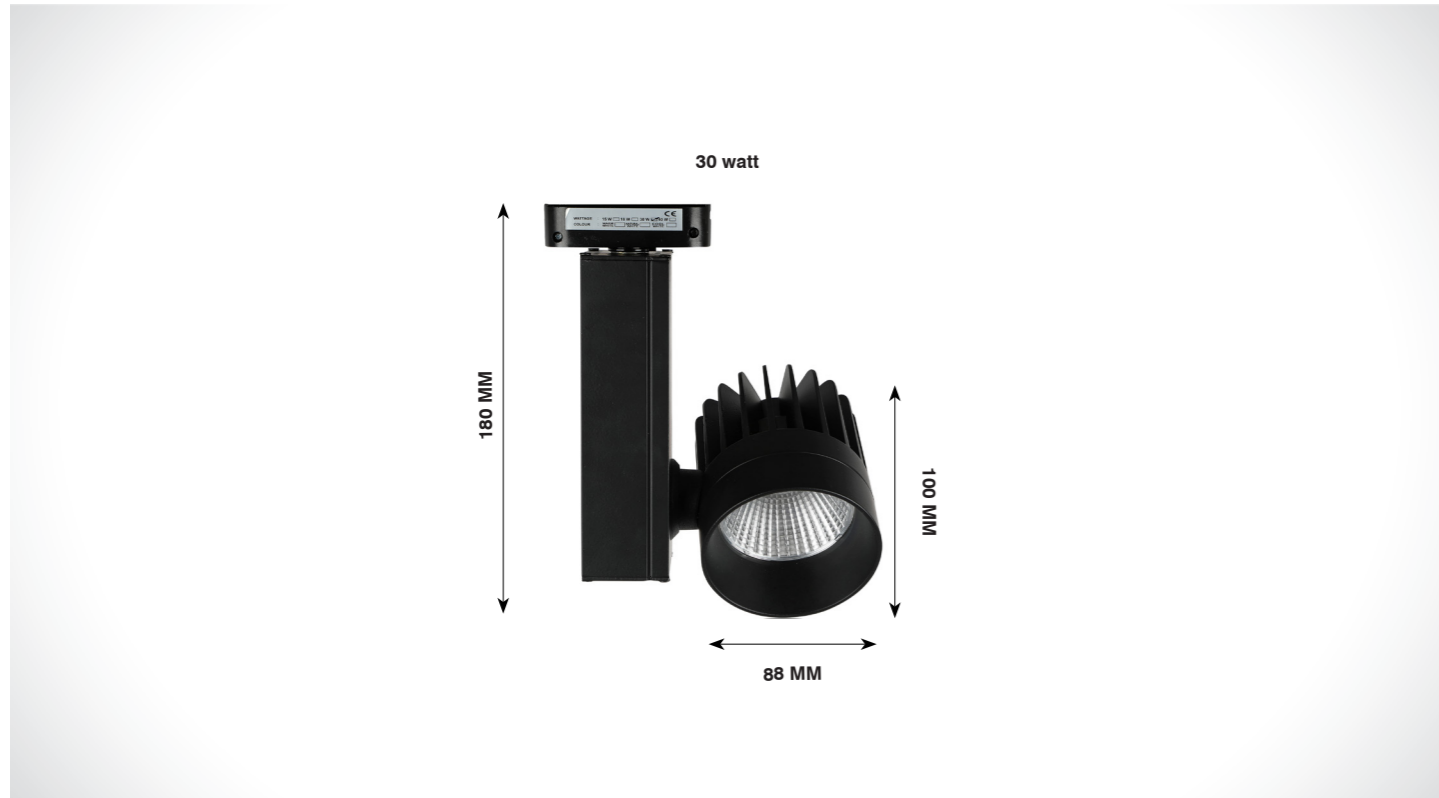

DUKE

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-TL-265-30w-R-W.WHT	80 / 90	3000K	Diameter	Height	3300 lm	36-42V@750mA	Housing	Aluminium
SL-TL-265-30w-R-N.WHT		4000K	88 x 100	180	3600 lm		LED Make	Citizen / Cree / Bridgelux
SL-TL-265-30w-R-WHT		6500K			3750 lm		Driver Brands	Philips / Fulham
							Dimming	Triac / 0-10v / Dali



On request also available in CCT - 2700K / 3500K / 5000K


TRACKSPOT



Available Body Finish : Black / White

SOREN

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-TL-264-6w-R-W.WHT	80 / 90	3000K	Diameter	Length	660 lm	36-42V@150mA	Housing	Aluminium
SL-TL-264-6w-R-N.WHT		4000K	42	134	720 lm		LED Make	Cree / Bridgelux
SL-TL-264-6w-R-WHT		6500K			750 lm		Driver Brands	Philips



On request also available in CCT - 2700K / 3500K / 5000K



TRACKSPOT



Available Body Finish : Black / White

HEALER

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-TL-238-25w-R-W.WHT	80 / 90	3000K	Diameter	Length	2750 lm	36-42V@610mA	Housing	Aluminium
SL-TL-238-25w-R-N.WHT		4000K	61	143	3000 lm		LED Make	Citizen / Cree / Bridgelux
SL-TL-238-25w-R-WHT		6500K			3125 lm		Driver Brands	Fulham
							Dimming	Triac / 0-10v / Dali
SL-TL-238-35w-R-W.WHT	80 / 90	3000K	Diameter	Length	3850 lm	36-42V@800mA	Housing	Aluminium
SL-TL-238-35w-R-N.WHT		4000K	80	162	4200 lm		LED Make	Citizen / Cree / Bridgelux
SL-TL-238-35w-R-WHT		6500K			4375 lm		Driver Brands	Fulham
							Dimming	Triac / 0-10v / Dali



On request also available in CCT - 2700K / 3500K / 5000K


TRACKSPOT



Available Body Finish : Black / White

FLAME

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-TL-210-15w-R-W.WHT	80 / 90	3000K	Diameter	Length	1650 lm	36-42V@350mA	Housing	Aluminium
SL-TL-210-15w-R-N.WHT		4000K	60	82	1800 lm		LED Make	Citizen / Cree / Bridgelux
SL-TL-210-15w-R-WHT		6500K			1875 lm		Driver Brands	Fulham
							Dimming	Triac / 0-10v / Dali




On request also available in CCT - 2700K / 3500K / 5000K

TRACKSPOT



STORM

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-STL-266-12w-R-W.WHT	80 / 90	3000K	Diameter	Height	1320 lm	36-42V@300mA	Housing	Aluminium
SL-STL-266-12w-R-N.WHT		4000K	60	122	1440 lm		LED Make	Citizen / Cree / Bridgelux
SL-STL-266-12w-R-WHT		6500K			1500 lm		Driver Brands	Philips / Fulham



On request also available in CCT - 2700K / 3500K / 5000K


TRACKSPOT



OCEAN

Product Code	Dimension (in mm)		System Specs	
SL-TL-227-GU10 Base	Diameter	Length	Housing	Aluminium
	56	123	LED Make	-
			Driver Brands	-
			Dimming	-

Swivel Angle



On request also available in CCT - 2700K / 3500K / 5000K



SPOT LIGHT SERIES

SPOT LIGHT



Available Reflector Finish : Chrome / Black / White / Rose Gold


SPYRO

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-SP-198-4w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	440 lm	3-3.6V@700mA	Housing	Aluminium
SL-SP-198-4w-R-N.WHT		4000K	35	37.5	φ30	480 lm		LED Make	Cree
SL-SP-198-4w-R-WHT		6500K				500 lm		Driver Brands	Srishti
								Dimming	Triac / 0-10v / Dali

Beam Angle





SPOT LIGHT

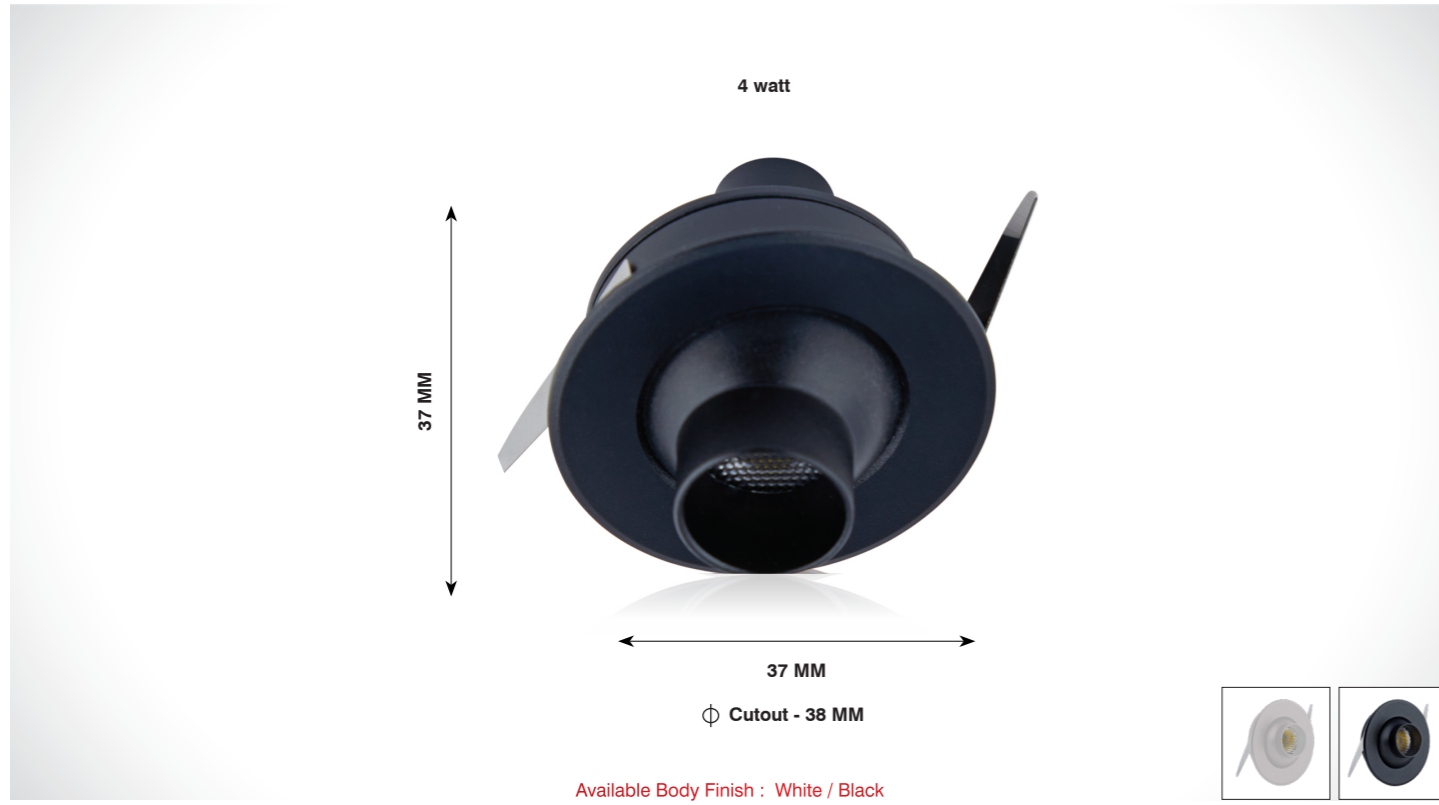

STELIOS


Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-SP-252-4w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	440 lm	3-3.6V@700mA	Housing	Aluminium
SL-SP-252-4w-R-N.WHT		4000K	48	37	∅38	480 lm		LED Make	Cree
SL-SP-252-4w-R-WHT		6500K				500 lm		Driver Brands	Srishti
								Dimming	Triac / 0-10v / Dali



Application




SPOT LIGHT

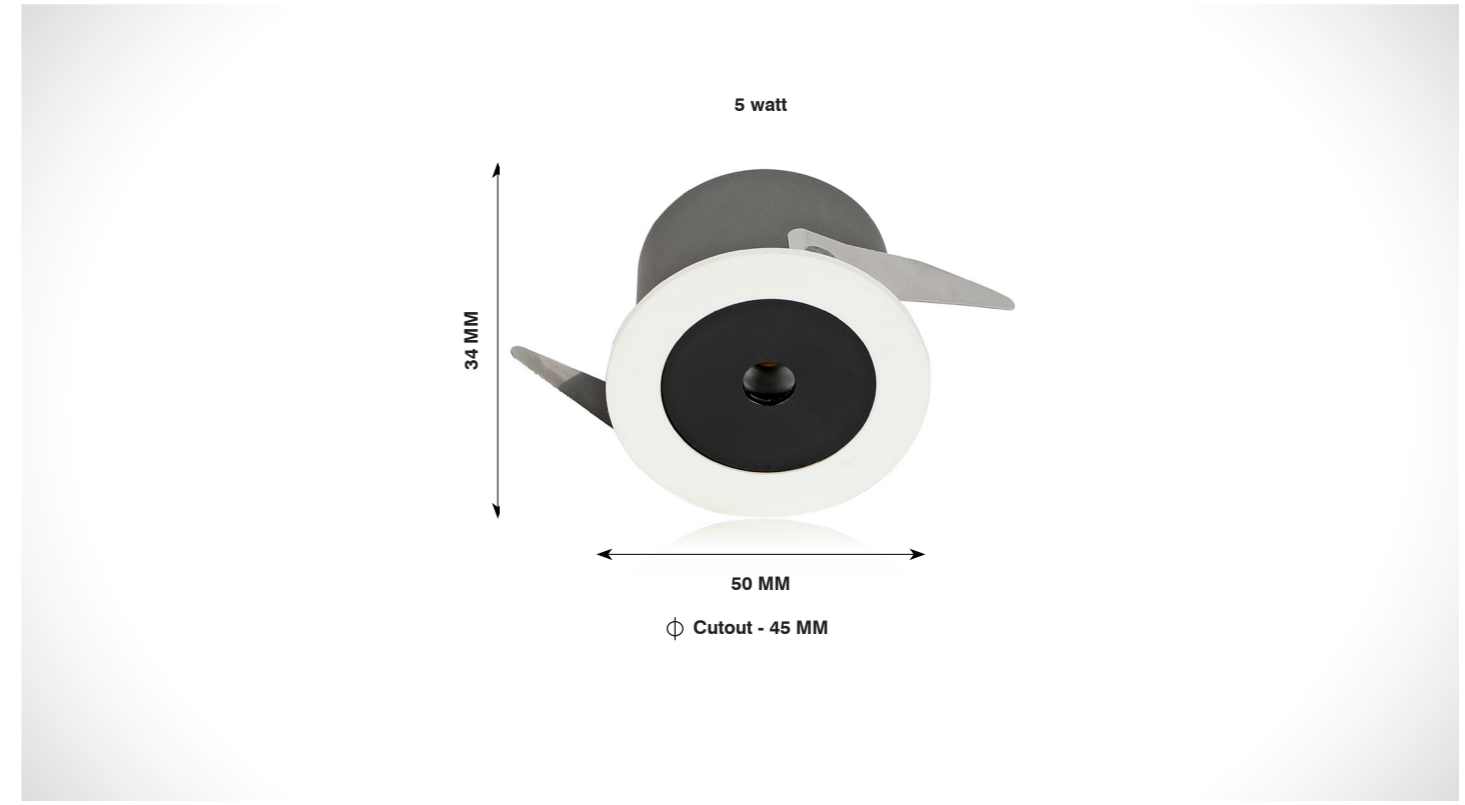

SAGE

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-SP-258-5w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	550 lm	3-3.6VDC@700mA	Housing	Aluminium
SL-SP-258-5w-R-N.WHT		4000K	50	34	∅45	600 lm		LED Make	Cree
SL-SP-258-5w-R-WHT		6500K				625 lm		Driver Brands	Srishti
								Dimming	Triac / 0-10v / Dali

Beam Angle




Application



SPOT LIGHT



SPOT LIGHT

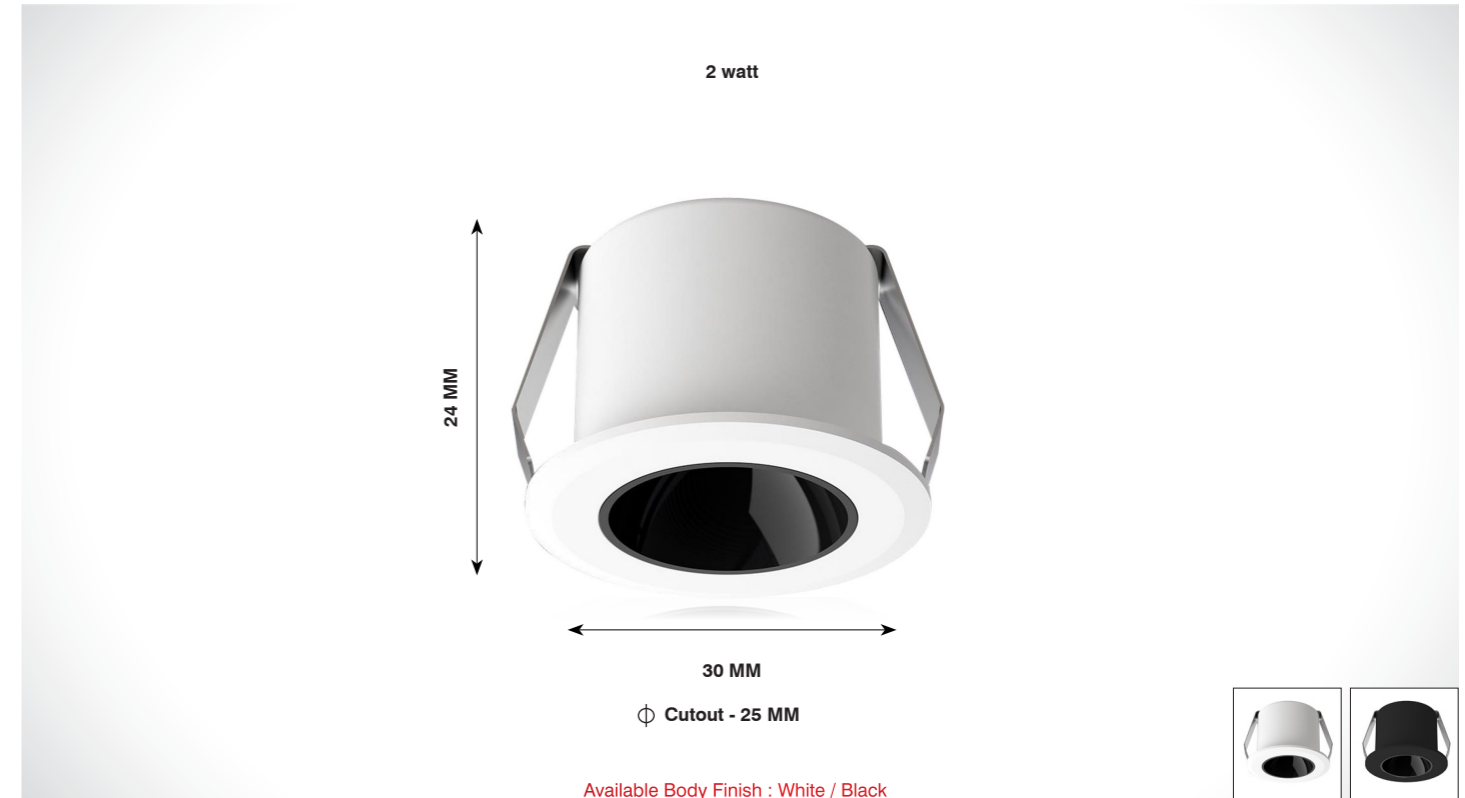


ESPEN

Wall Washer

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-SP-268-2w-R-W.WHT	80 / 90	3000K	Diameter	Depth	Cutout	220 lm	3-3.6VDC@350mA	Housing	Aluminium
SL-SP-268-2w-R-N.WHT		4000K	34	15	∅27	240 lm		LED Make	Osram
SL-SP-268-2w-R-WHT		6500K				250 lm		Driver Brands	Srishti


Beam Angle



KWID

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-SP-305-2w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	220 lm	3-14V@300mA	Housing	Aluminium
SL-SP-305-2w-R-N.WHT		4000K	30	24	∅25	240 lm		LED Make	Osram
SL-SP-305-2w-R-WHT		6500K				250 lm		Driver Brands	Srishti

Beam Angle




SPOT LIGHT




TRIBER

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-SP-306-3w-R-W.WHT	80 / 90	3000K	Diameter	Height	Cutout	330 lm	2-5V@600mA	Housing	Aluminium
SL-SP-306-3w-R-N.WHT		4000K	40	31	∅ 35	360 lm		LED Make	Osram
SL-SP-306-3w-R-WHT		6500K				375 lm		Driver Brands	Srishti

Beam Angle




SPOT LIGHT

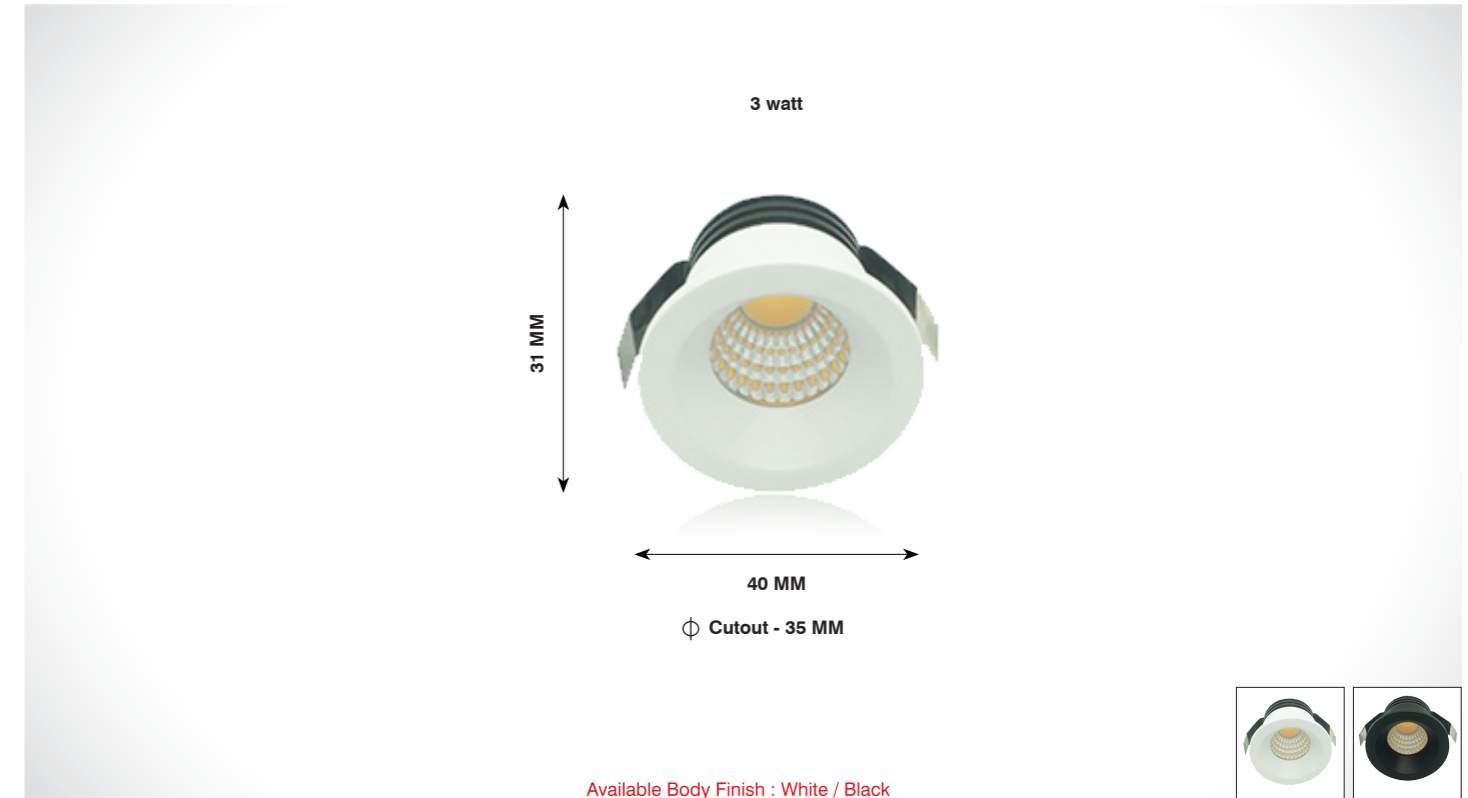

BLITZ

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-SP-307-3w-R-W.WHT	80	3000K	Diameter	Height	Cutout	330 lm	2-5V@600mA	Housing	Aluminium
SL-SP-307-3w-R-N.WHT		4000K	38	30	∅ 36	360 lm		LED Make	Epistar
SL-SP-307-3w-R-WHT		6500K				375 lm		Driver Brands	Srishti


Beam Angle





CABINET LIGHT SERIES

CABINET LIGHT

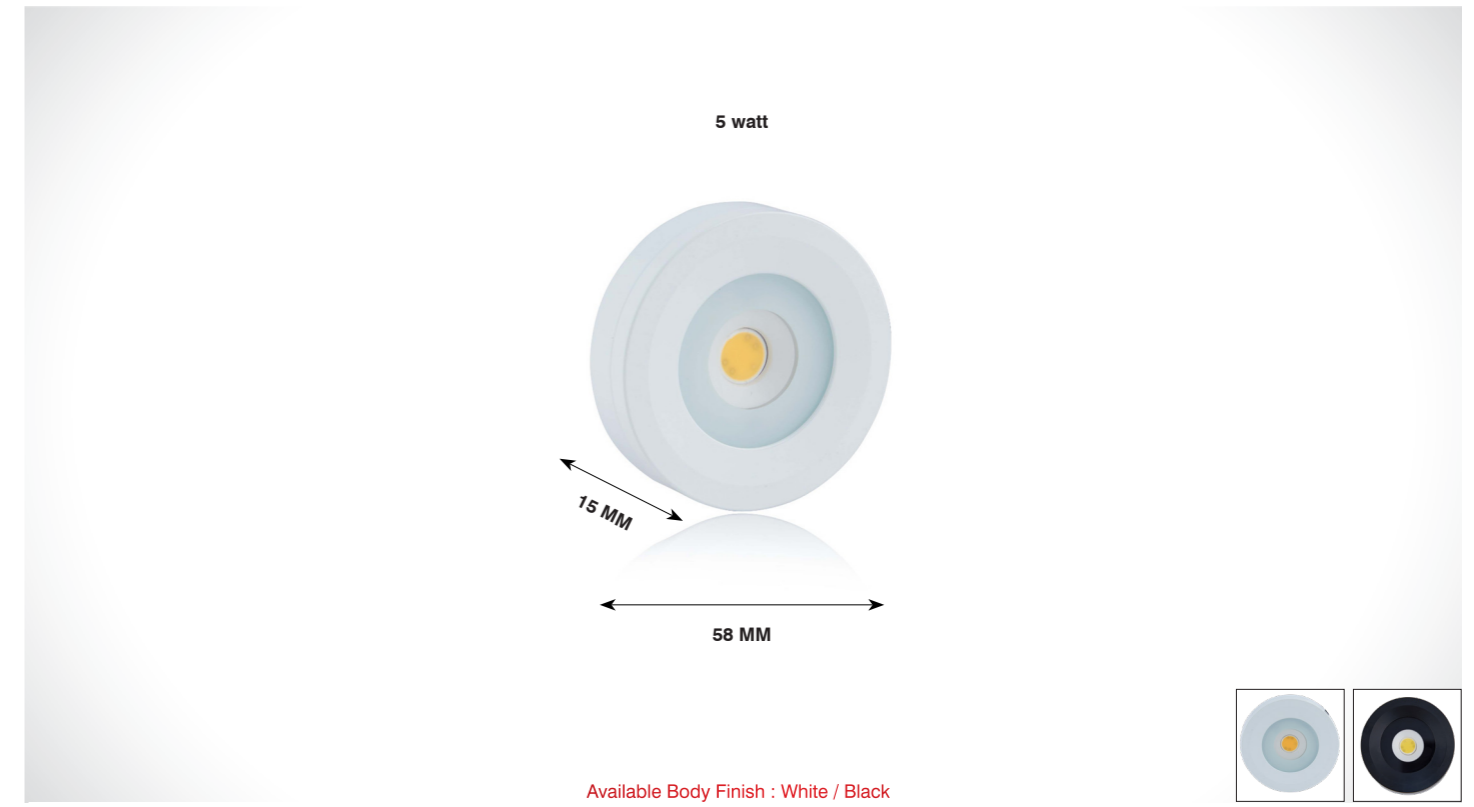

Available Body Finish : White / Black

BEAT


(IP54)

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-SCB-253-5w-R-W.WHT	80 / 90	3000K	Diameter	Height	550 lm	Inbuilt	Housing	Aluminium
SL-SCB-253-5w-R-N.WHT		4000K	58	15	600 lm		LED Make	Cree
SL-SCB-253-5w-R-WHT		6500K			625 lm		Driver Brands	Inbuilt

Beam Angle



PICTURE LIGHT

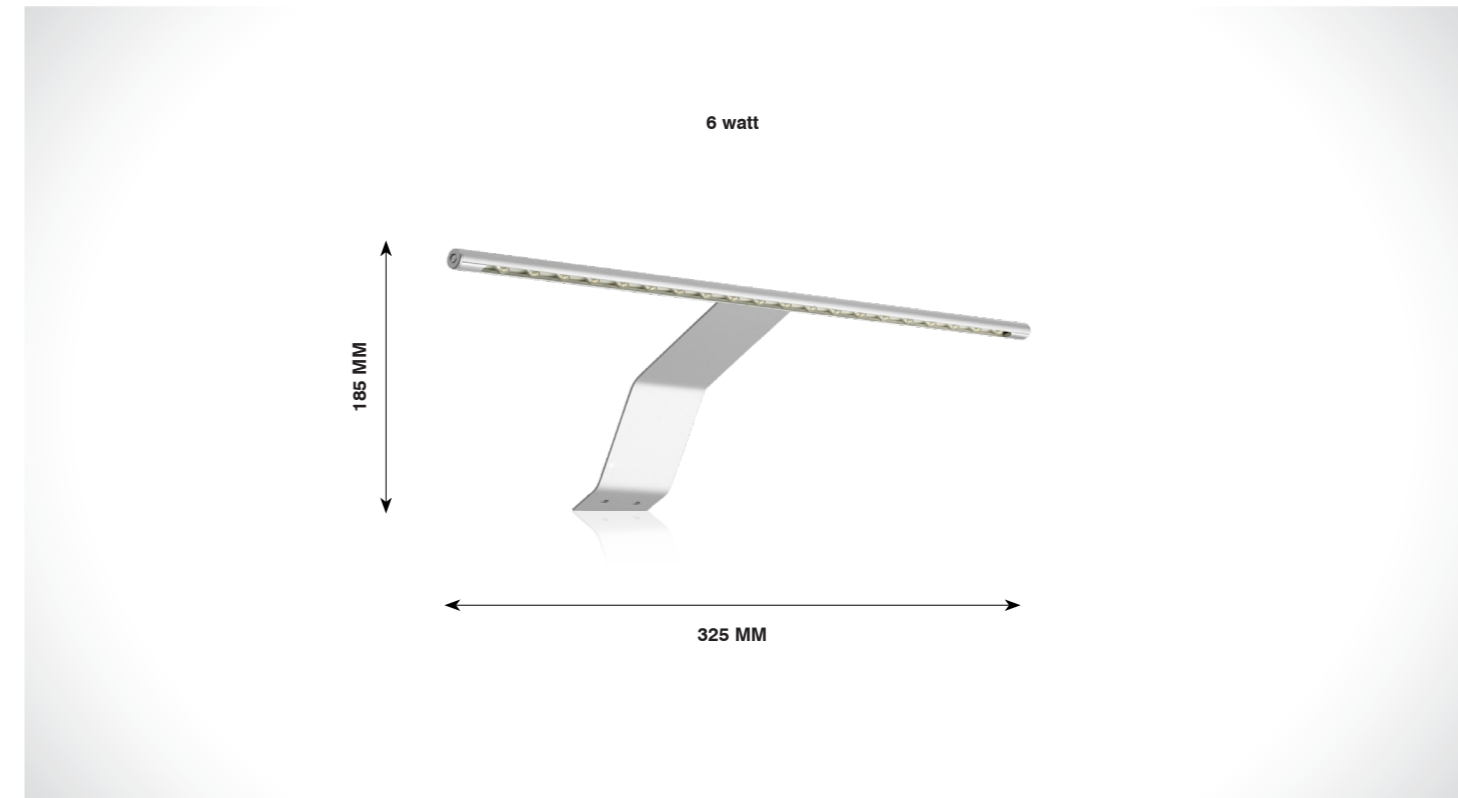


PICTURE LIGHT SERIES

SPRIT

Product Code	CRI	CCT	Dimension (in mm)		Lumen	Driver Opt	System Specs	
SL-PTL-64-6w-R-W.WHT	80	3000K	Diameter	Height	660 lm	3-12V@350mA	Housing	Aluminium
SL-PTL-64-6w-R-N.WHT		4000K	325	185	720 lm		LED Make	Edison
SL-PTL-64-6w-R-WHT		6500K			750 lm		Driver Brands	Srishti

Beam Angle Swivel Angle



Application



STRIP LIGHT



(IP20)


STRIP LIGHT SERIES

Product Code	Description (per meter)	Volt	Colour Temperature	Dimension	Wattage (per mtr.)	Input Voltage	Lumes
SL-ST-158-5w-IP20	2835-60 led 5W per mtr	12V	Wht / N-Wht / W-Wht	10mm x 5mtrs	5w	12V	24-26
SL-ST-194-12w-IP20	2835-120 Led 12w per mtr	12V	Wht / N-Wht / W-Wht	8mm x 5mtrs	12w	12V	28-30
SL-ST-195-16w-IP20	2835-180 Led 16w per mtr	12V	Wht / N-Wht / W-Wht	10mm x 5mtrs	16w	12V	28-30
SL-ST-196-22w-IP20	2835-240 Led 22w per mtr	12V	Wht / N-Wht / W-Wht	10mm x 5mtrs	22w	12V	28-30
SL-ST-251-12w-IP20	2835-120 Led 12w per mtr	12V	Wht / N-Wht / W-Wht	5mm x 5mtrs	12w	12V	24-26
SL-ST-255-12w-IP20-E	2835-120 Led 12w per mtr	12V	Wht / N-Wht / W-Wht	8mm x 5mtrs	12w	12V	24-26
SL-ST-11-15W-RGB-IP20	5050-60 Led 15w per mtr	12V	RGB	10mm x 5mtrs	15w	12V	----
SL-ST-233-12w-Tunable-IP20	12V-2835-120 Led 12w-per mtr	12V	CCT Tunable	10mm x 5mtrs	12w	12V	28-30
SL-ST-234-16w-Tunable-IP20	12V-2835-168 Led 16w-per mtr	12V	CCT Tunable	10mm x 5mtrs	16w	12V	28-30
SL-ST-311-12w	24V-2835-120 Led 12w-per mtr (24 VDC)	24V	Wht / N-Wht / W-Wht	8mm x 5mtrs	12w	24V	28-30
SL-ST-312-16w	24V-2835-168 Led 16w-per mtr (24 VDC)	24V	Wht / N-Wht / W-Wht	10mm x 5mtrs	16w	24V	28-30
SL-ST-313-22w	24V-2835-240 Led 22w-per mtr (24 VDC)	24V	Wht / N-Wht / W-Wht	10mm x 5mtrs	22w	24V	28-30



FOOT LIGHT SERIES

FOOT LIGHT

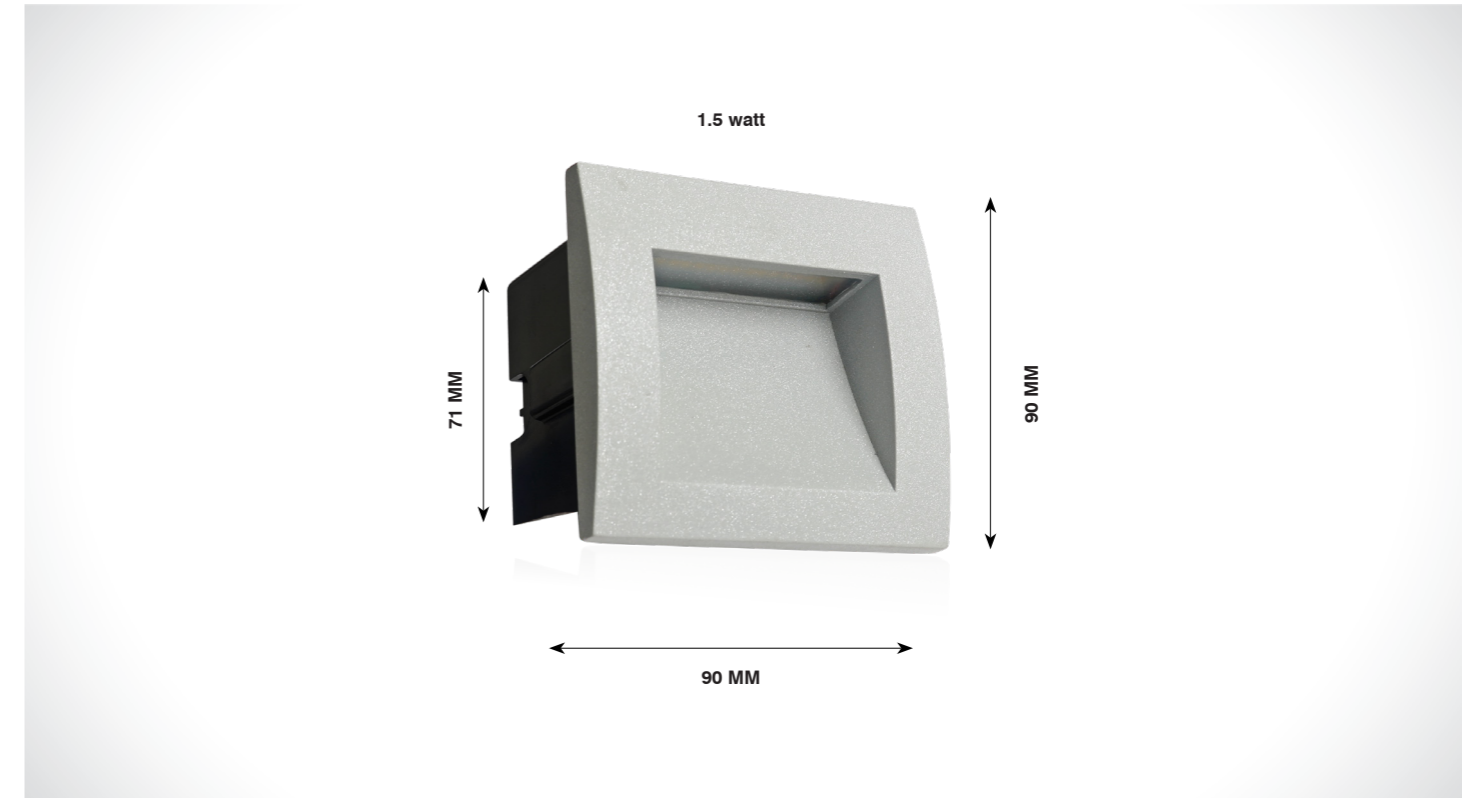

GLORY


(IP65)

Product Code	CRI	CCT	Dimension (in mm)		Driver Opt	System Specs	
SL-FT-31-S-I-1.5w-W.WHT	80	3000K	Diameter	Depth	Inbuilt	Housing	Aluminium
			90 x 90	71		LED Make	Edison
						Driver Brands	Srishti

Beam Angle



FOOT LIGHT

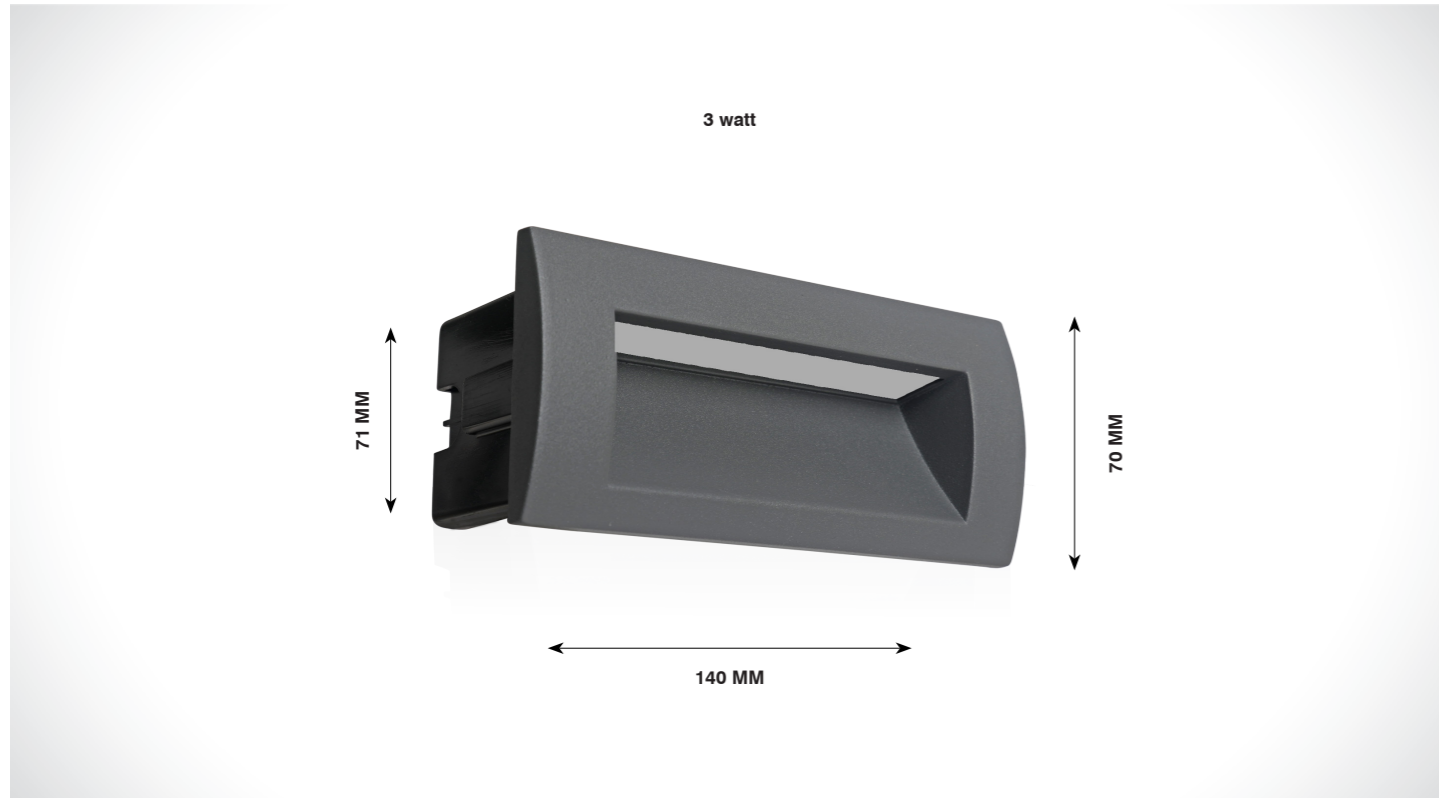


DINAZ


(IP65)

Product Code	CRI	CCT	Dimension (in mm)		Driver Opt	System Specs	
SL-FT-32-I-3w-W.WHT	80	3000K	Diameter	Depth	Inbuilt	Housing	Aluminium
			140 x 70	71		LED Make	Edison
						Driver Brands	Srishti

Beam Angle



FOOT LIGHT

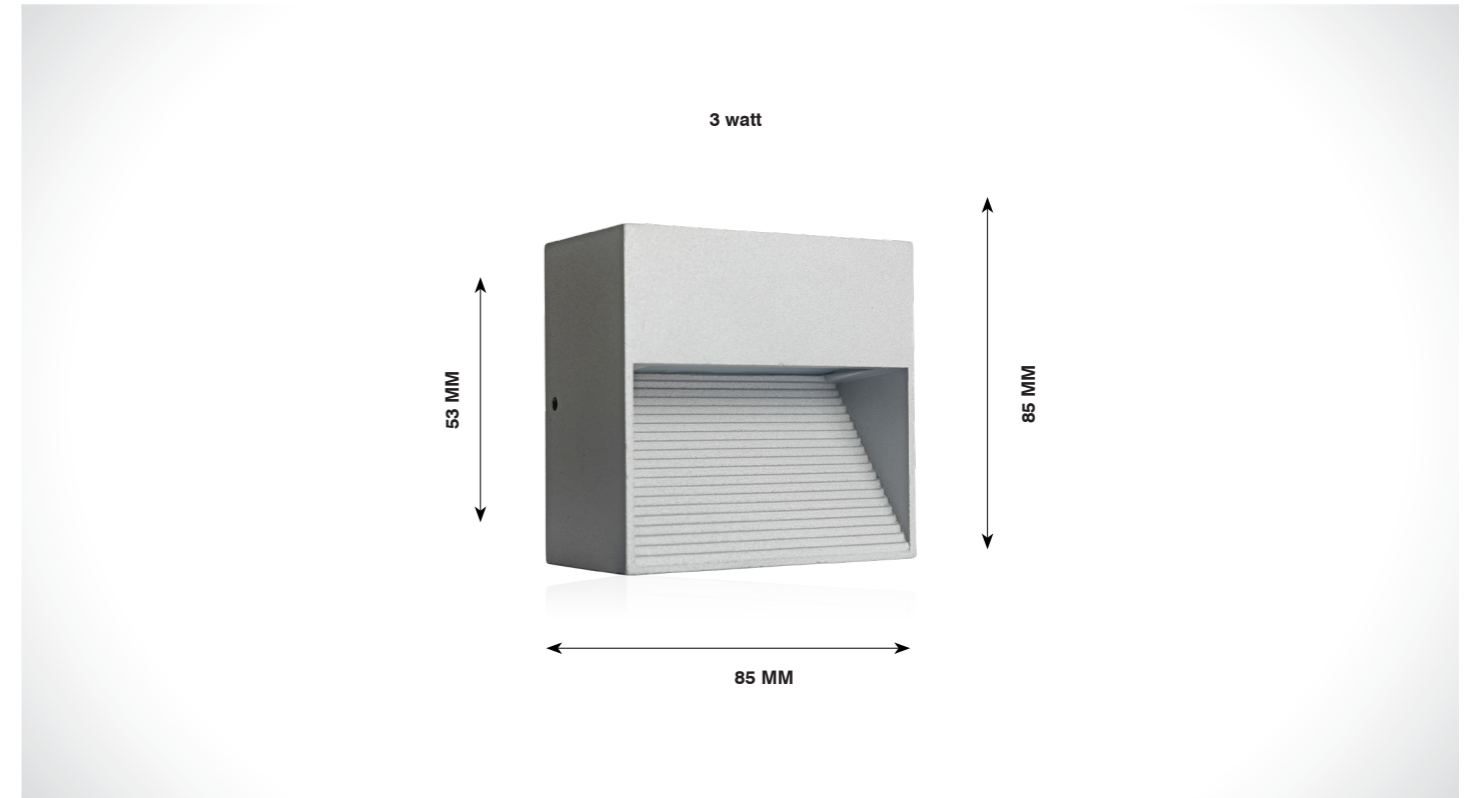

BOSTAN


(IP65)

Product Code	CRI	CCT	Dimension (in mm)		Driver Opt	System Specs	
SL-FT-33-I-3w-W.WHT	80	3000K	Diameter	Depth	Inbuilt	Housing	Aluminium
			85 x 85	53		LED Make	Edison
						Driver Brands	Srishti


Beam Angle



FOOT LIGHT

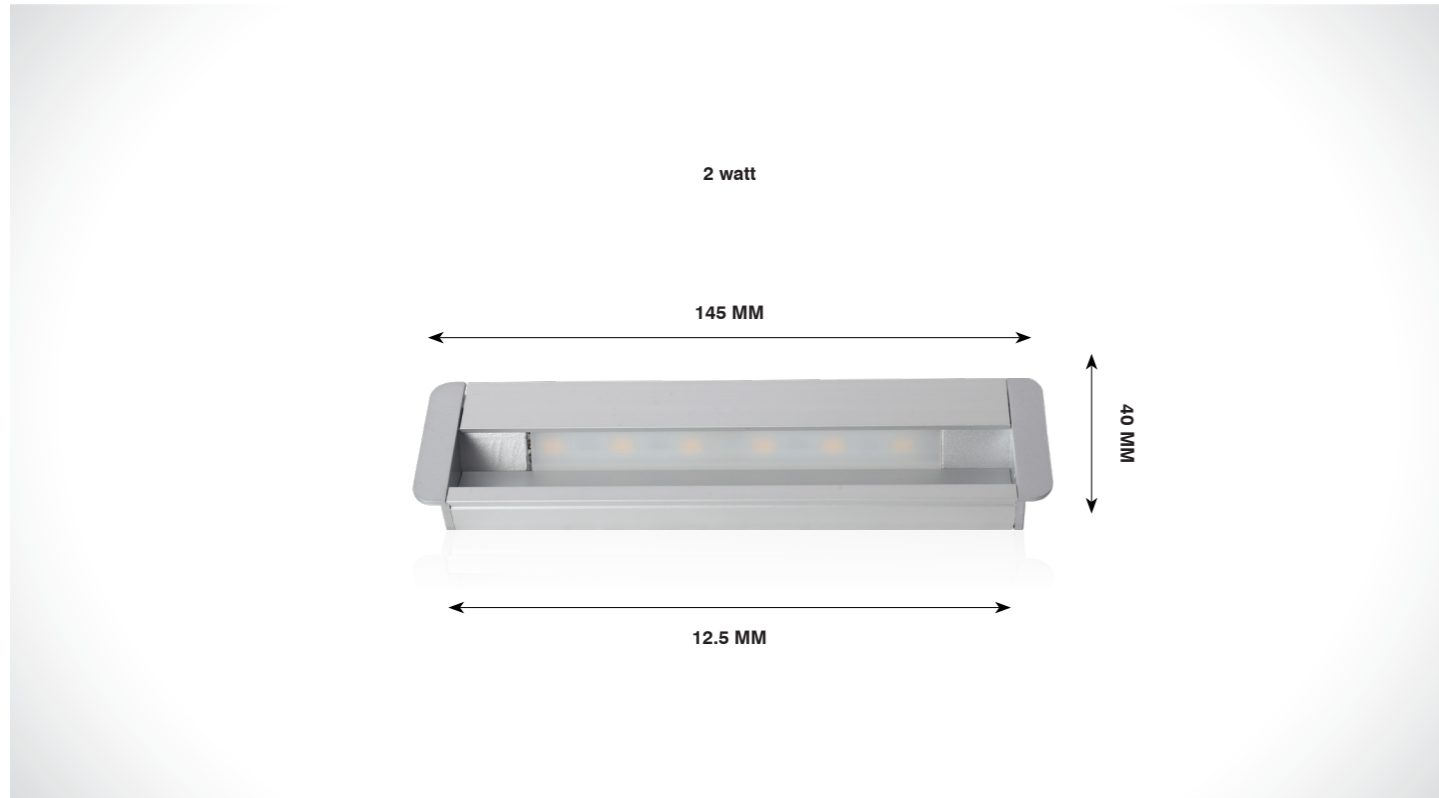

FOOT LIGHT

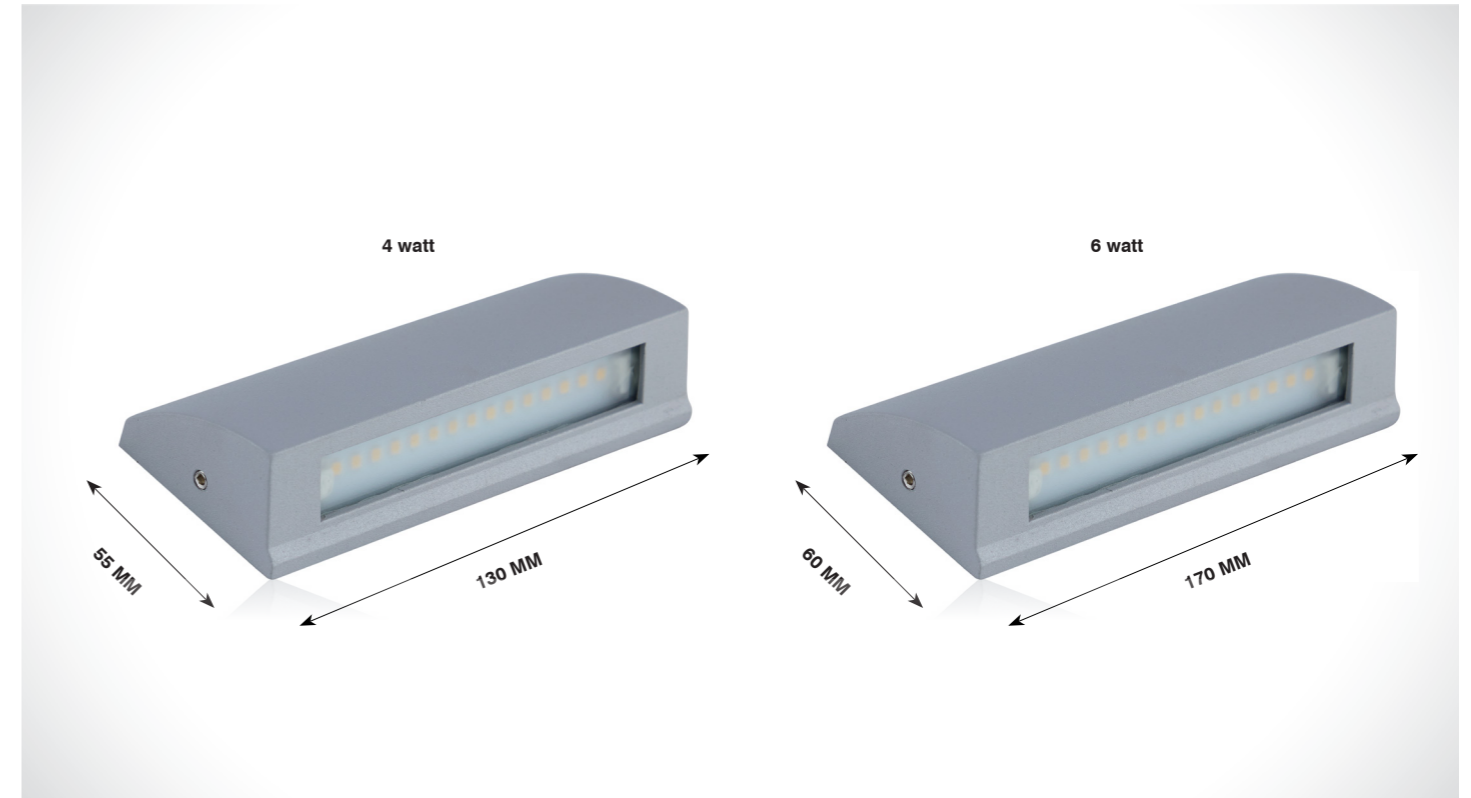

AVERY

(IP20)

Product Code	CRI	CCT	Dimension (in mm)		Driver Opt	System Specs	
SL-FT-63-I-2w-W.WHT	80	3000K	Diameter	Depth	Inbuilt	Housing	Aluminium
			145 x 40	12.5		LED Make	Edison
						Driver Brands	Srishti

Beam Angle



OLIVIA

(IP65)

Product Code	CRI	CCT	Dimension (in mm)		Driver Opt	System Specs	
SL-FT-140-4w-W.WHT	80	3000K	Diameter	Height	Inbuilt	Housing	Aluminium
			130	55		LED Make	Edison
						Driver Brands	Srishti

Beam Angle



Product Code	CRI	CCT	Dimension (in mm)		Driver Opt	System Specs	
SL-FT-141-6w-W.WHT	80	3000K	Diameter	Height	Inbuilt	Housing	Aluminium
			170	60		LED Make	Edison
						Driver Brands	Srishti




Application



Application



FOOT LIGHT

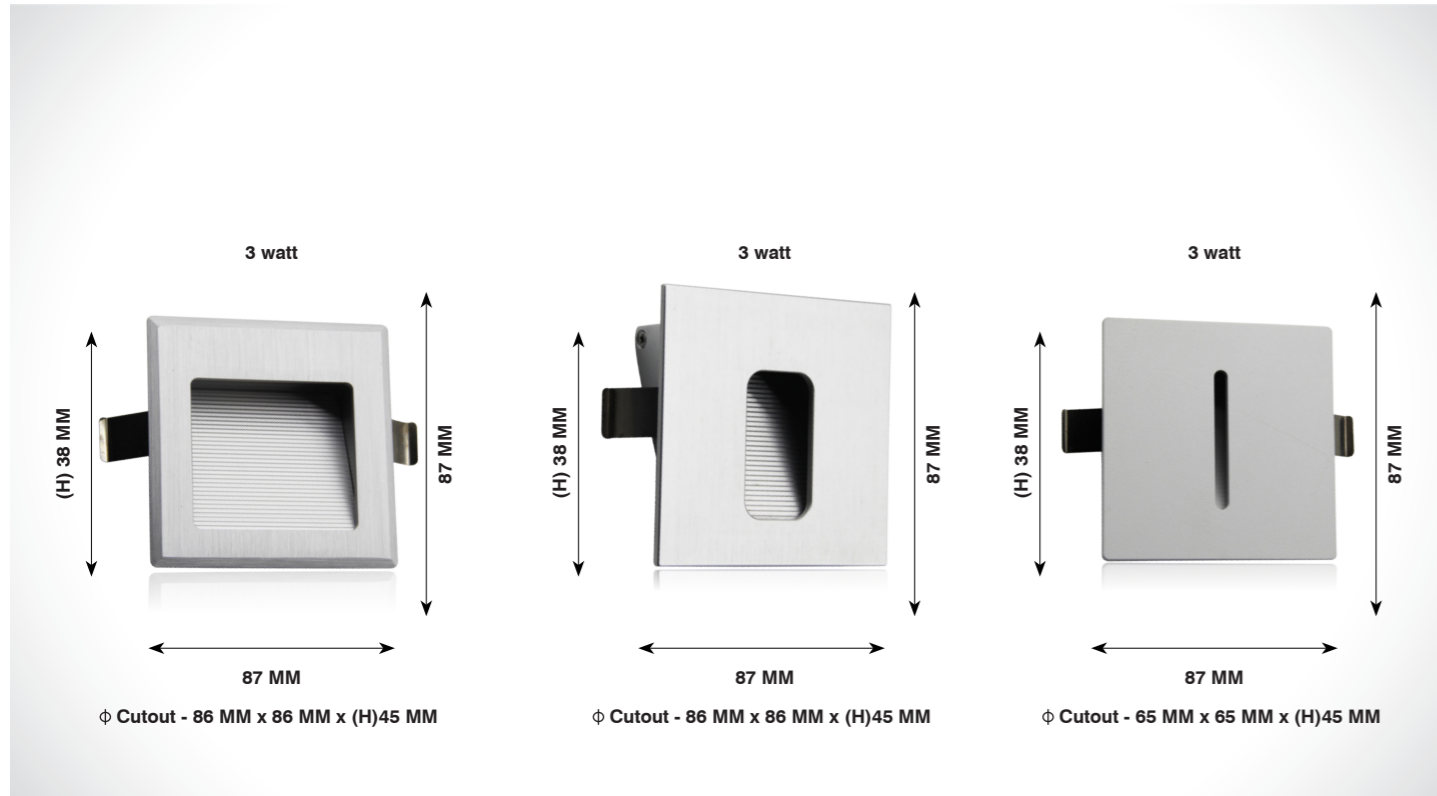

ASTRIA

(IP20)

Product Code	CRI	CCT	Dimension (in mm)			Driver Opt	System Specs	
SL-FT-239-3w-W.WHT	80	3000K	Diameter	Height	Cutout	3.326VDC@700mA	Housing	Aluminium
			87 X 87	38	φ 86 x 86 x (H)45		LED Make	Cree
							Driver Brands	Srishti

Beam Angle




FEDRA

(IP20)

Product Code	CRI	CCT	Dimension (in mm)			Driver Opt	System Specs	
SL-FT-240-3w-W.WHT	80	3000K	Diameter	Height	Cutout	3.326 VDC@700mA	Housing	Aluminium
			87 X 87	38	φ 86 x 86 x (H)45		LED Make	Cree
							Driver Brands	Srishti

Beam Angle



FLARIO

(IP20)

Product Code	CRI	CCT	Dimension (in mm)			Driver Opt	System Specs	
SL-FT-241-3w-W.WHT	80	3000K	Diameter	Height	Cutout	3.326 VDC@700mA	Housing	Aluminium
			87 X 87	38	φ 65 X 65 (H)45		LED Make	Cree
							Driver Brands	Srishti

Beam Angle




Application



SPIKE SERIES

SPIKE LIGHT

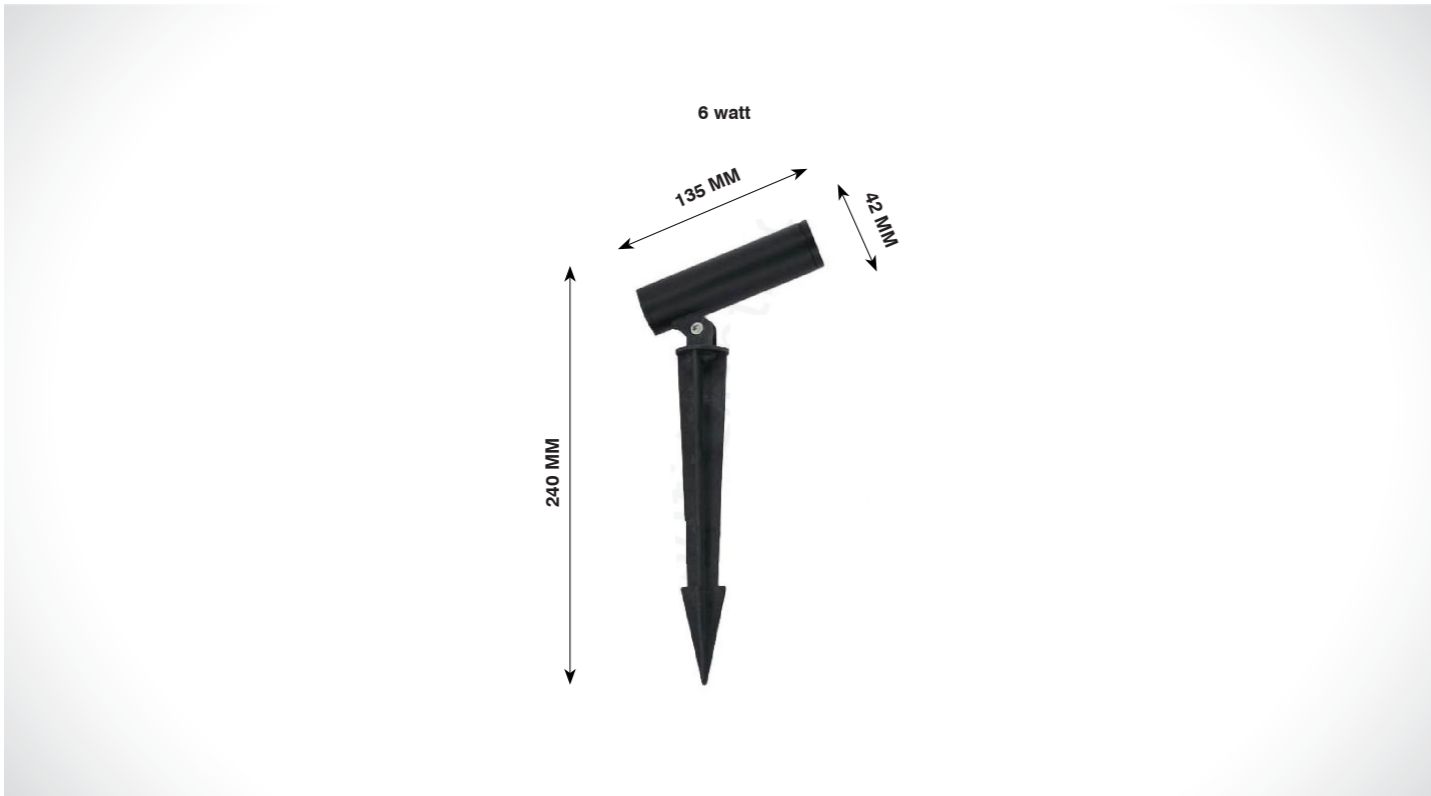

OLGA


(IP65)

Product Code	CRI	CCT	Dimension (in mm)			Driver Opt	System Specs	
			Diameter	Height	Depth		Housing	LED Make
SL-SPK-273-6w-R-W.WHT	80	3000K				36-42V@150mA	Aluminium	
SL-SPK-273-6w-R-N.WHT		4000K	42	240	135		Bridglux /Cree	
SL-SPK-273-6w-R-WHT		6500K					Philips	

Beam Angle



Application

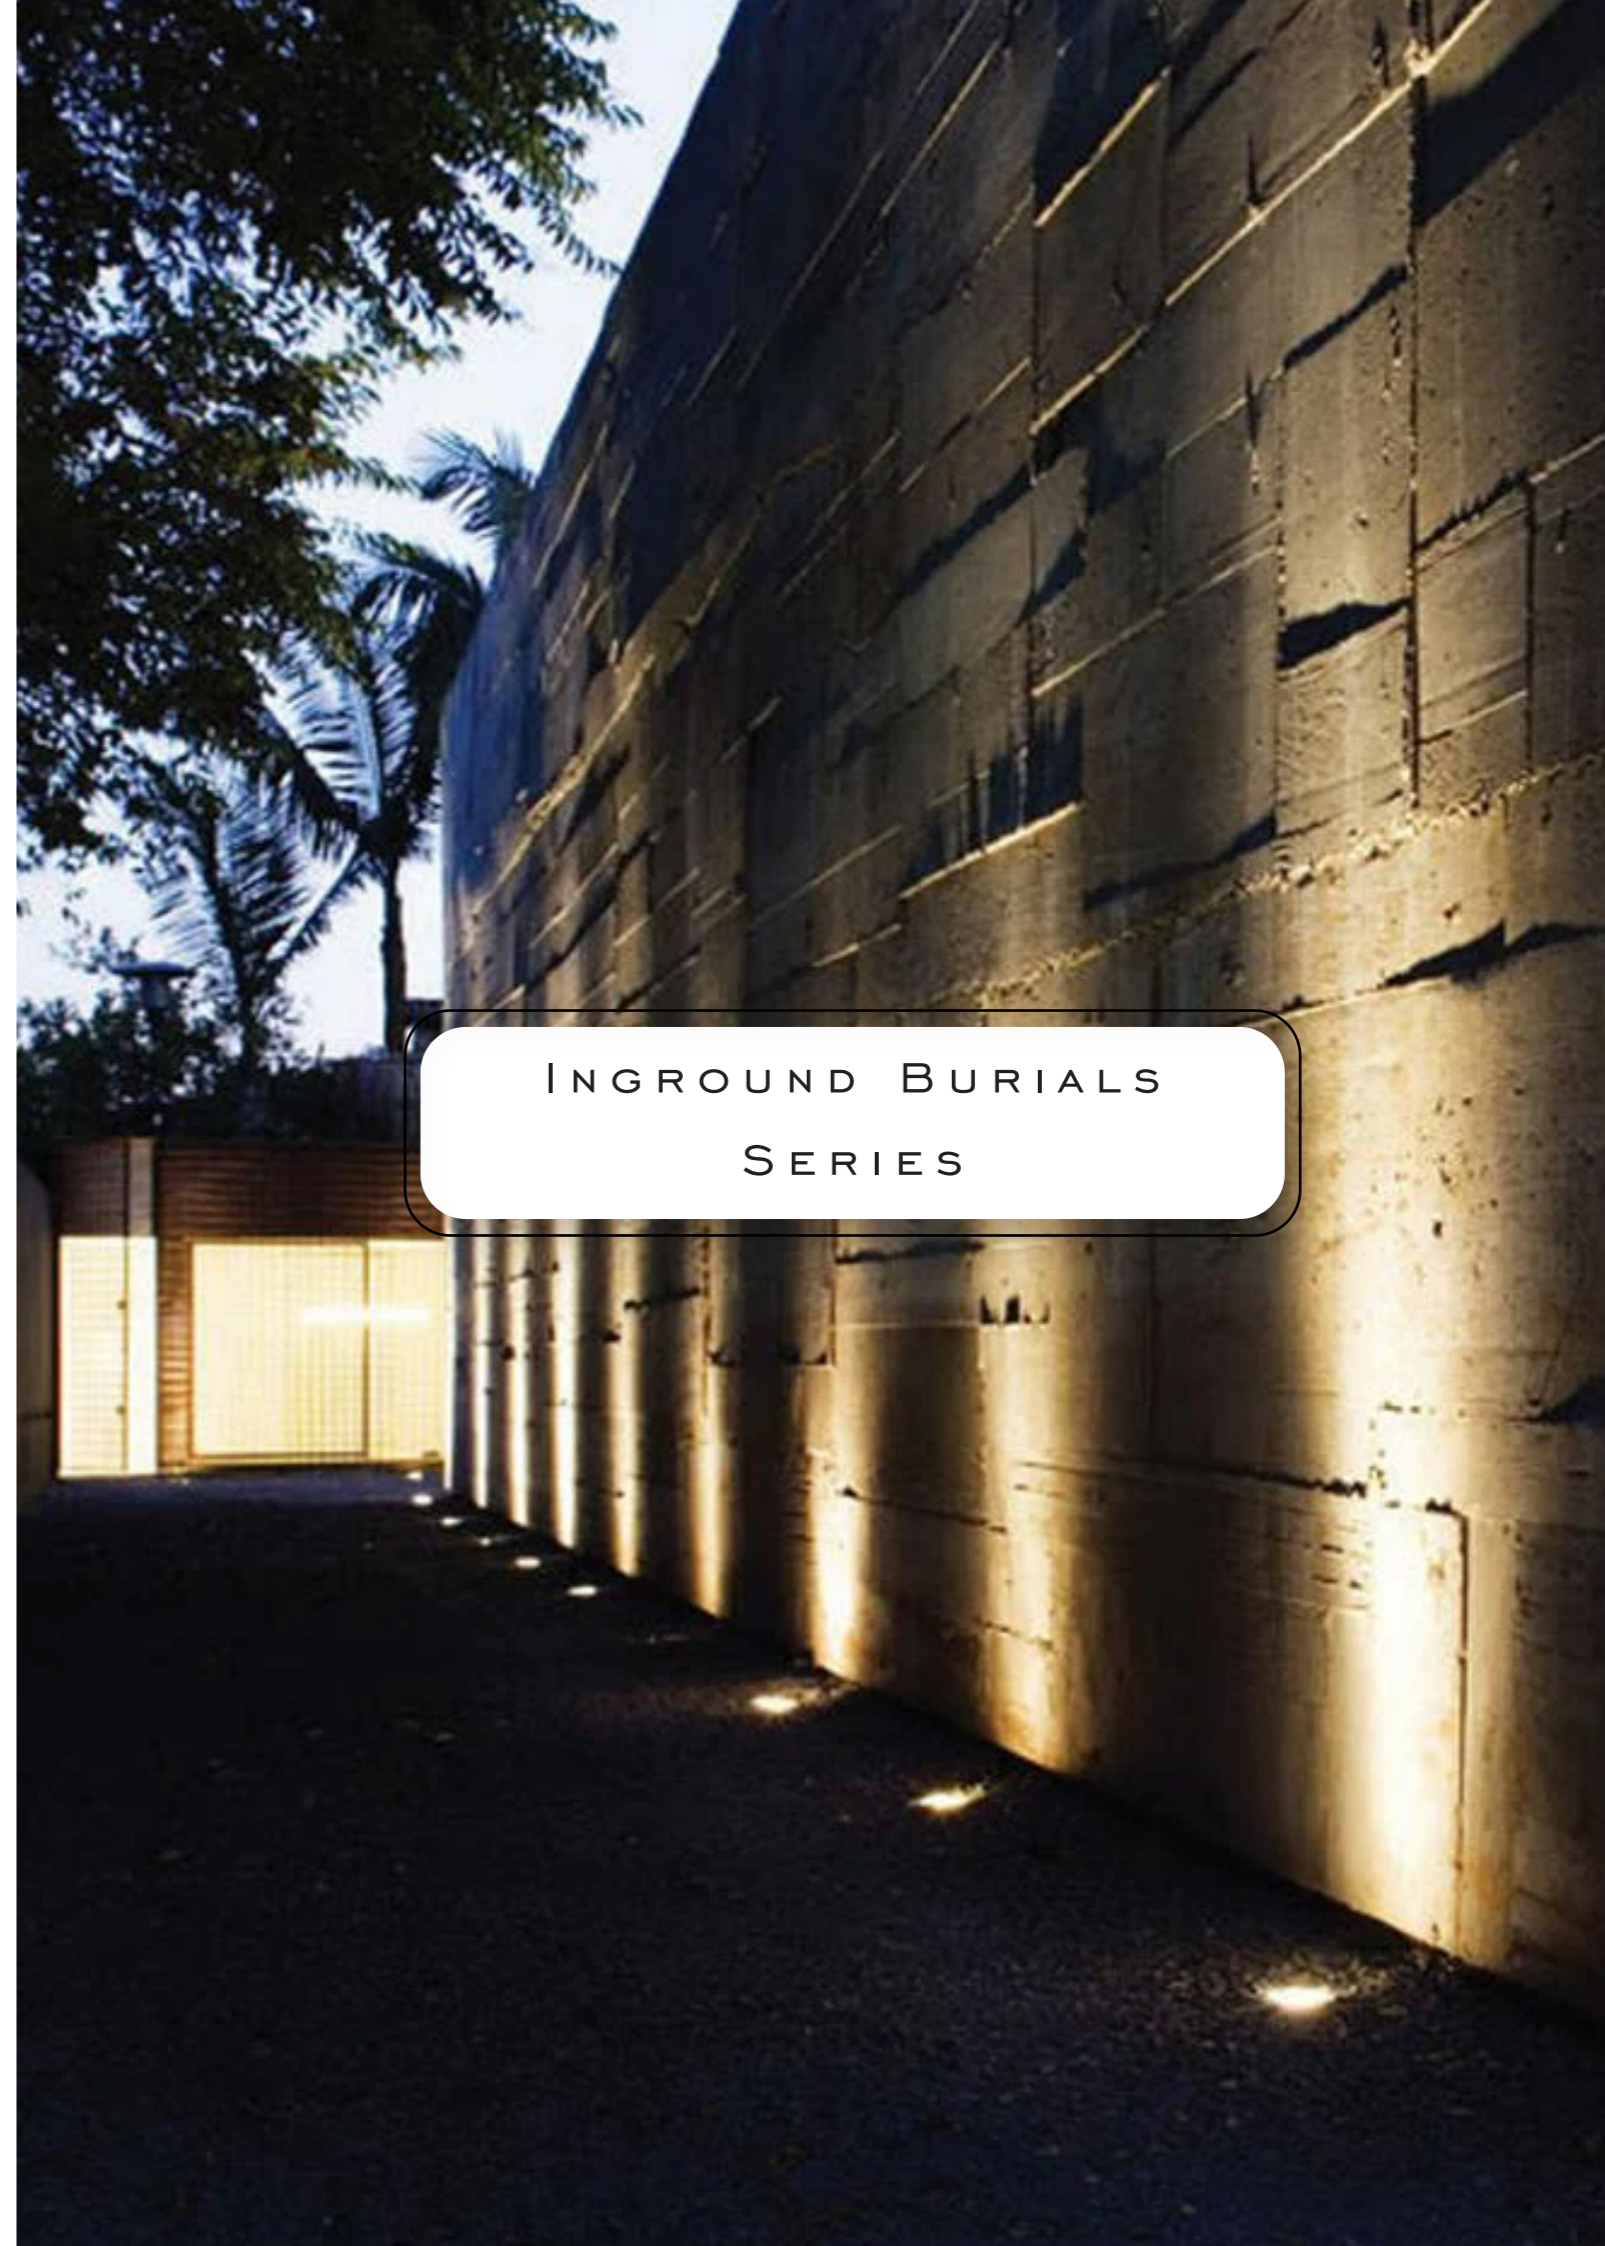


INGROUND BURIALS SERIES

INGROUND BURIALS



INGROUND BURIALS


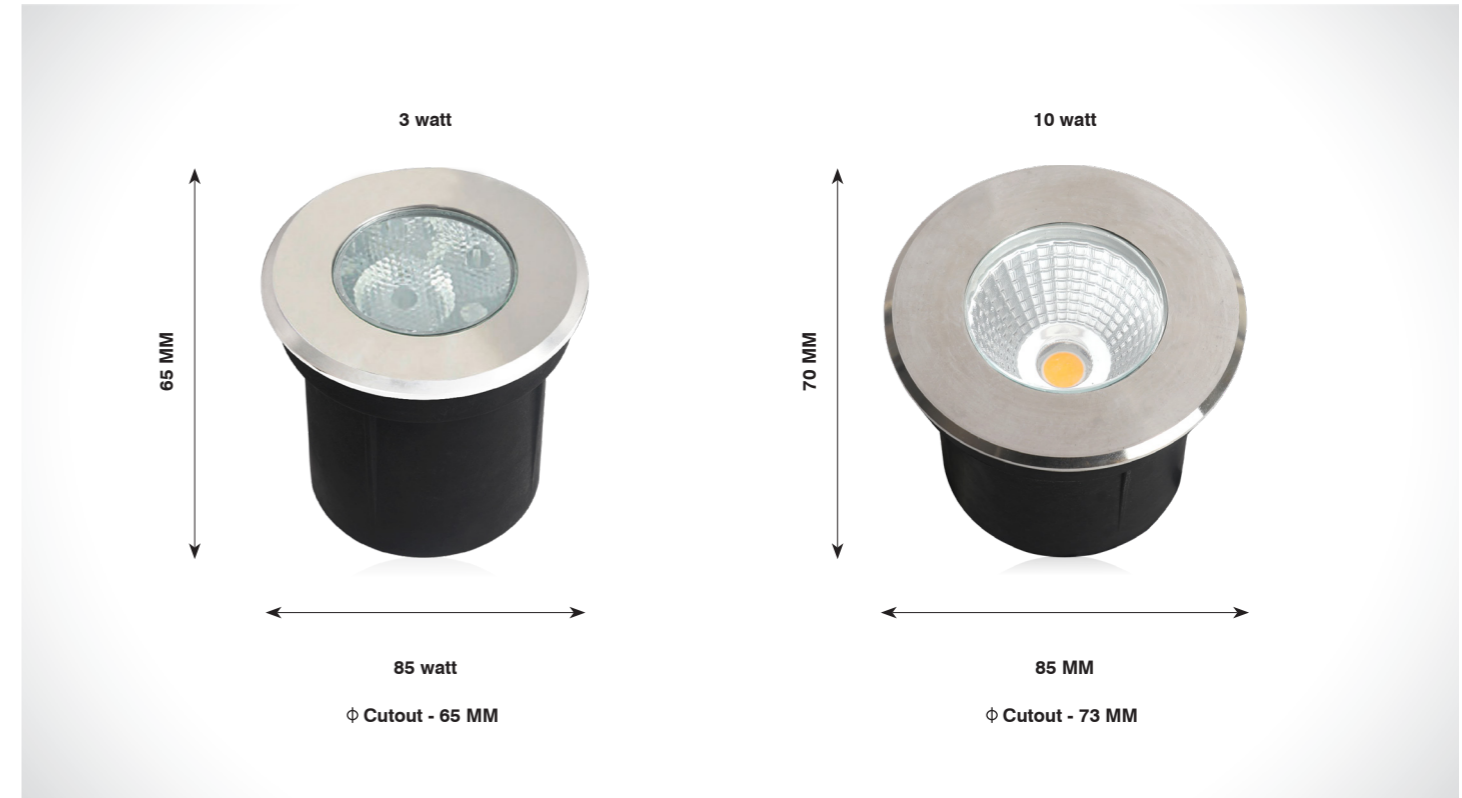


ZORRO

(IP65)

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-IG-59-1x1w-R-W.WHT	80	3000K	Diameter	Height	Cutout	110 lm	3-3.5V@350mA	Housing	SS + Aluminium
SL-IG-59-1x1w-R-N.WHT		4000K	45	50	φ 38	120 lm		LED Make	Edision
SL-IG-59-1x1w-WHT-R		6500K				125 lm		Driver Brands	Srishti
SL-IG-59-1x3w-R-W.WHT	80	3000K	Diameter	Height	Cutout	330 lm	3-3.5V@700mA	Housing	SS + Aluminium
SL-IG-59-1x3w-R-N.WHT		4000K	45	50	φ 38	360 lm		LED Make	Edision
SL-IG-59-1x3w-R-WHT		6500K				375 lm		Driver Brands	Srishti

Beam Angle




ZITA

(IP65)

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-IG-58-3x1w-R-W.WHT	80	3000K	Diameter	Height	Cutout	330 lm	3-12V@350mA	Housing	SS + Aluminium
SL-IG-58-3x1w-R-N.WHT		4000K	85	65	φ 65	360 lm		LED Make	Edision
SL-IG-58-3x1w-WHT		6500K				375 lm		Driver Brands	Srishti

Beam Angle



ZURINA

(IP65)

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-IG-193-10w-R-W.WHT	80	3000K	Diameter	Height	Cutout	1100 lm	36-42V@250mA	Housing	Aluminium
SL-IG-193-10w-R-N.WHT		4000K	85	70	φ 73	1200 lm		LED Make	Citizen
SL-IG-193-10w-R-WHT		6500K				1250 lm		Driver Brands	Fulham


Beam Angle





WALL LIGHT SERIES

WALL LIGHT

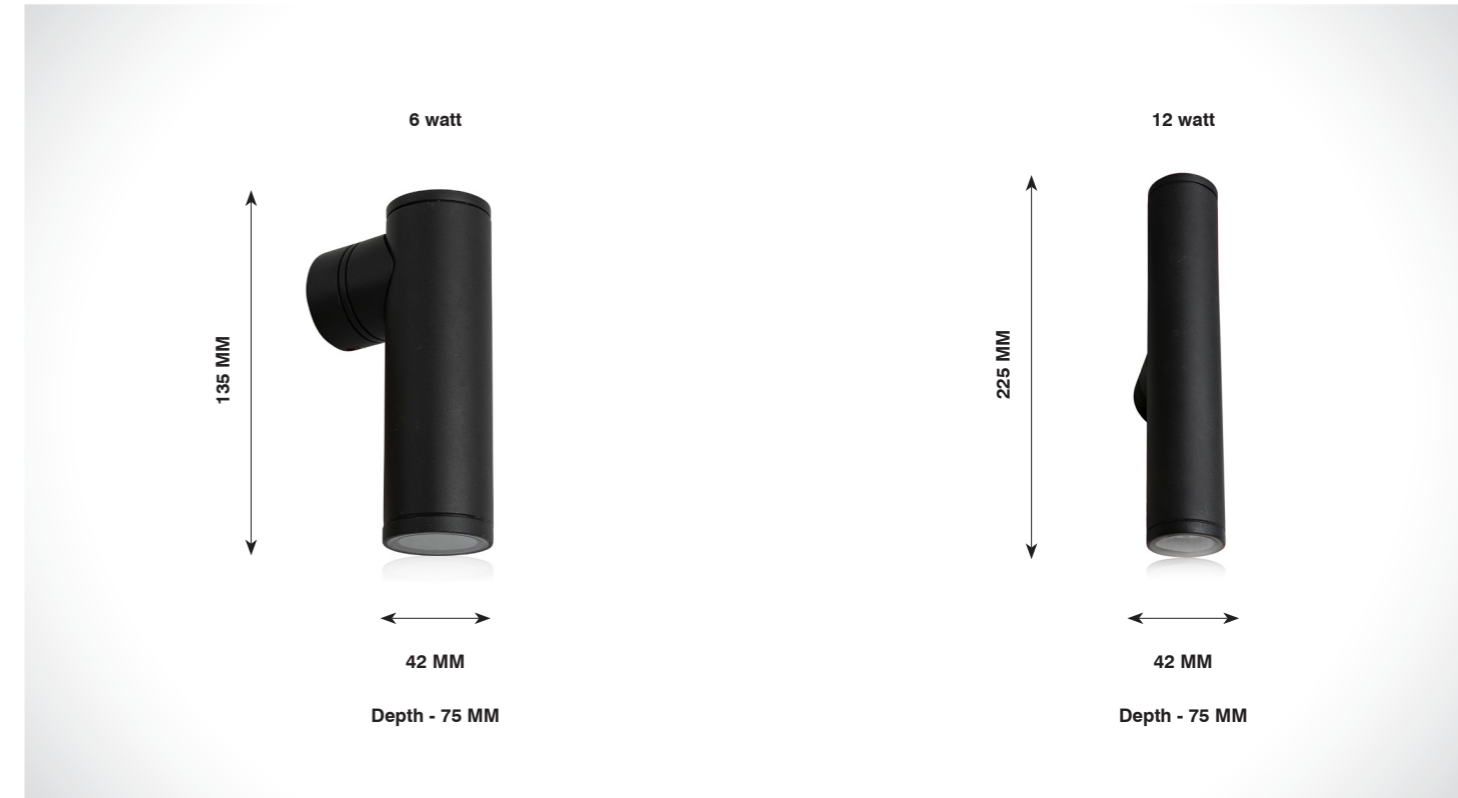

FLIP

(IP65)

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-WL-270-6w-R	80 / 90	3000K	Diameter	Height	Depth	660 lm	36-42V@150 mA	Housing	Aluminium
			42	135	75			LED Make	Bridglux /Cree
								Driver Brands	Philips
								Dimming	NA

Beam Angle



IRAN


(IP65)

Product Code	CRI	CCT	Dimension (in mm)			Lumen	Driver Opt	System Specs	
SL-WL-271-12w-R	80 / 90	3000K	Diameter	Height	Depth	1320 lm	36-42V@150 mA x 2	Housing	Aluminium
			42	225	75			LED Make	Bridglux /Cree
								Driver Brands	Philips
								Dimming	NA

Beam Angle



WALL LIGHT

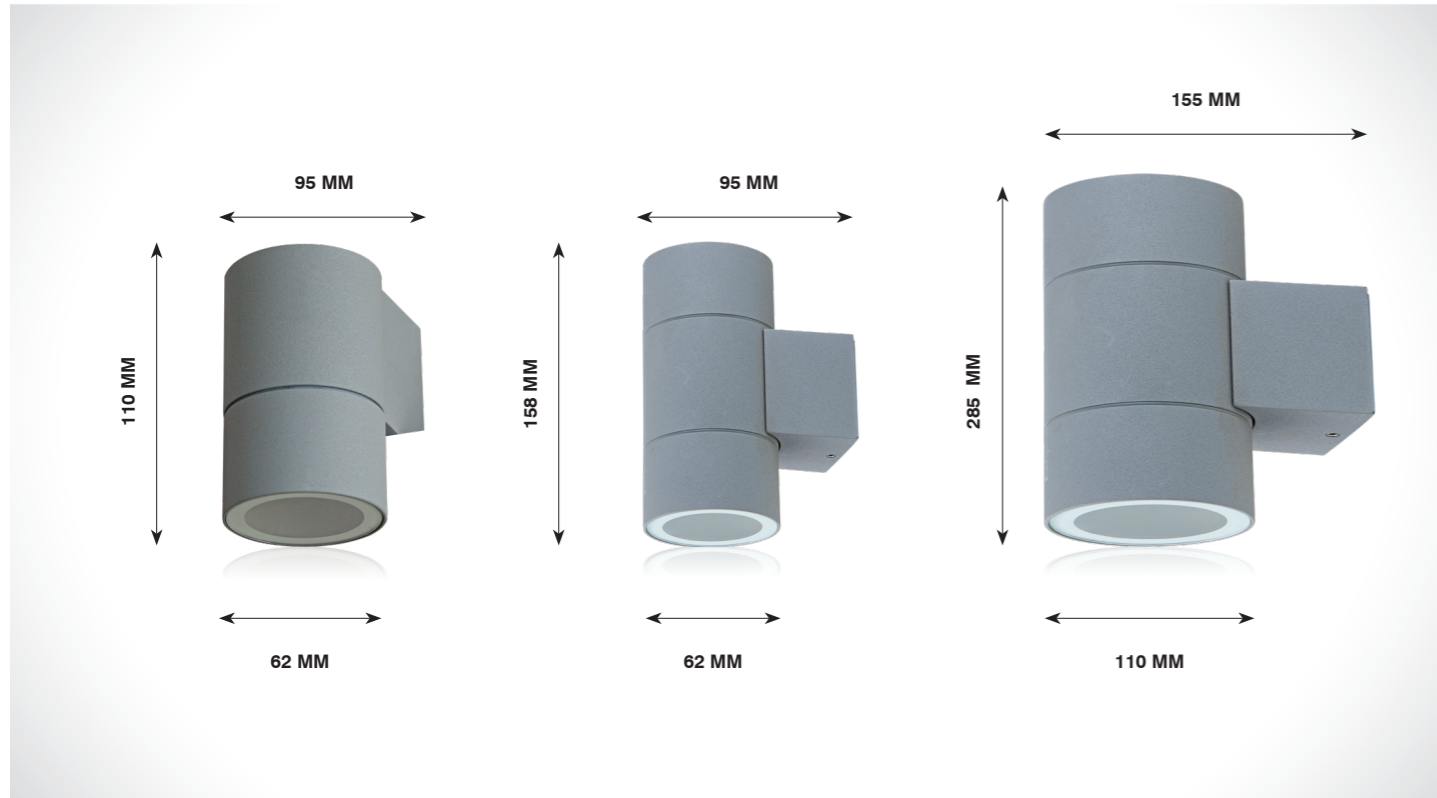

CARLOS

(IP65)

Product Code	Dimension (in mm)			System Specs	
	Diameter	Height	Depth	Housing	Aluminium
SL-WL-165	62	110	95		

JUAN

(IP65)


Product Code	Dimension (in mm)			System Specs	
	Diameter	Height	Depth	Housing	Aluminium
SL-WL-166	62	158	95		

ALWA

(IP65)

Product Code	Dimension (in mm)			System Specs	
	Diameter	Height	Depth	Housing	Aluminium
SL-WL-167	110	285	155		

Application

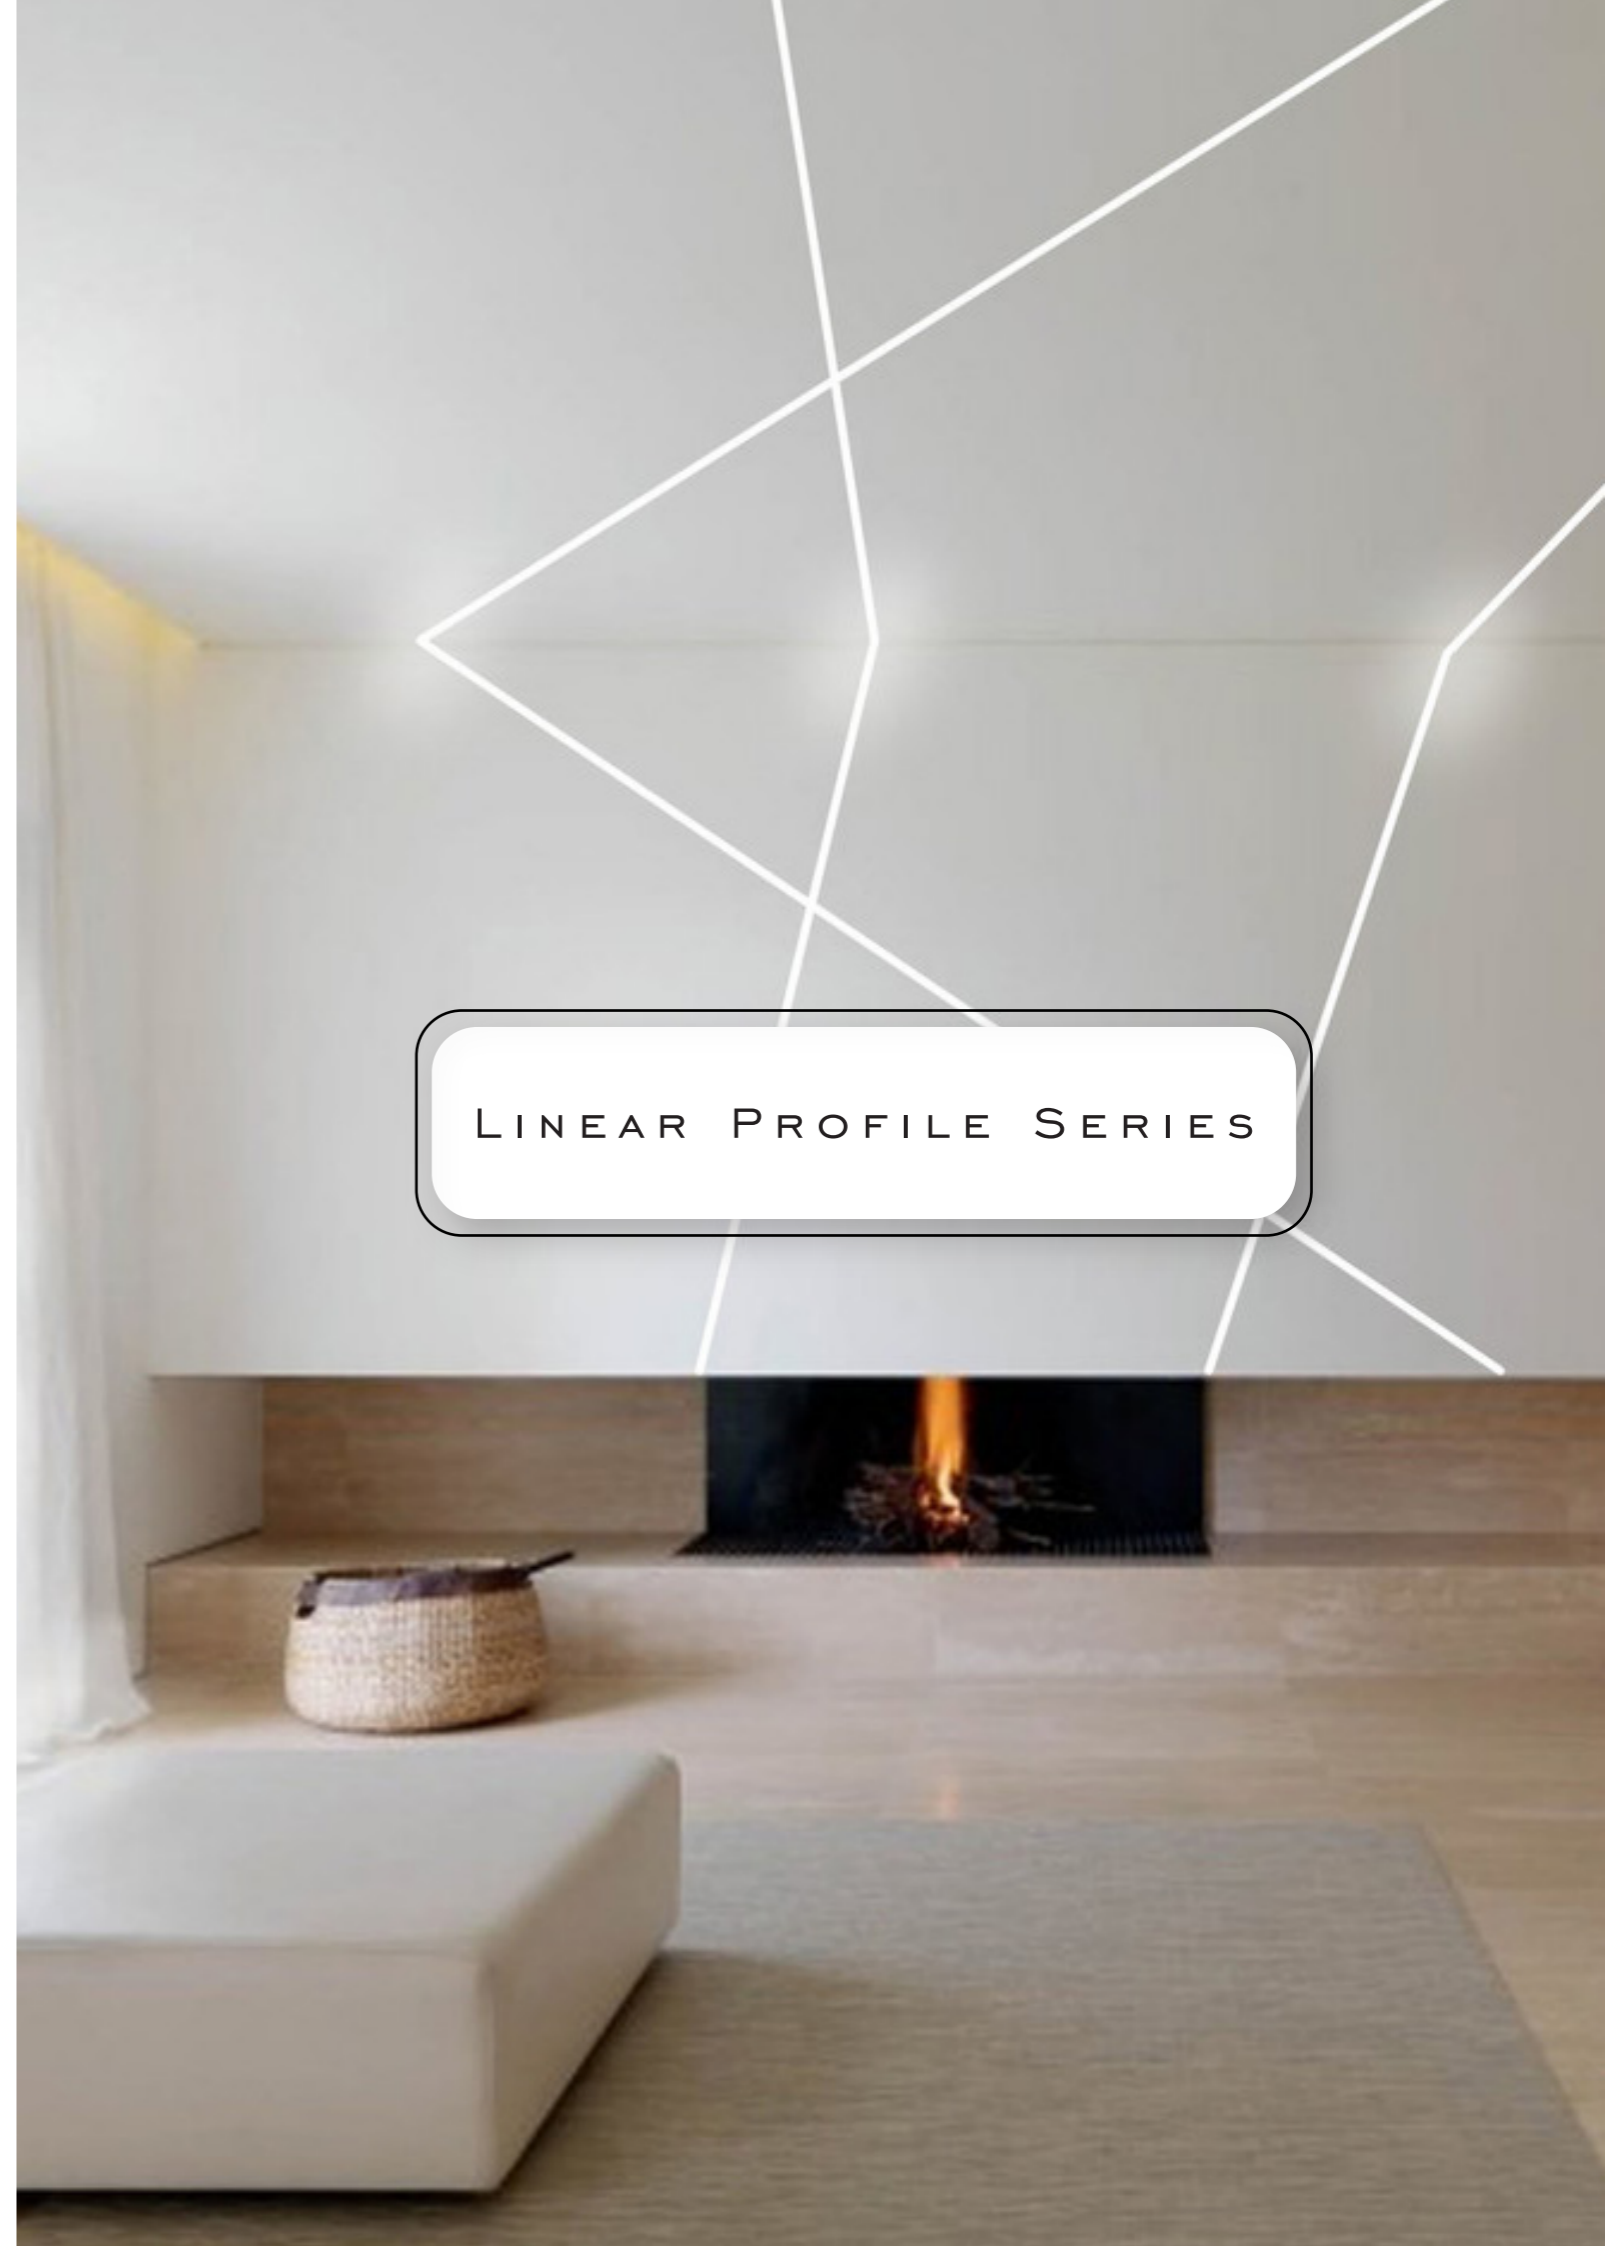

LINEAR PROFILE SERIES

LINEAR PROFILE



SL-ALP-145-SB (SURFACE BASIC)



SL-ALP-146-CB (CONCEAL BASIC)




SL-ALP-147-LB (LINEAR BASIC)




SL-ALP-148-LB (LINEAR BASIC)



SL-ALP-CORNER PROFILE

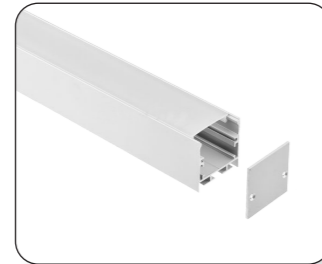

SL-ALP-35MM X 35MM SURFACE



SL-ALP-148-50MM X 50MM SURFACE


Product Code	Dimension (in mm)				Housing
	Length	Width	Height	Cutout	
SL-ALP-145-SB (Surface Basic)	2000	18	8	-	Aluminium
SL-ALP-146-CB (Conceal Basic)	2000	23.2	8	18	Aluminium
SL-ALP-147-LB (Deep Conceal Basic)	2000	27	14.5	18	Aluminium
SL-ALP-148-LB (Deep Surface Basic)	2000	18	14.5	-	Aluminium
SL-ALP-Corner Profile	2000	10	16	-	Aluminium
SL-ALP-35mm x 35mm Surface	2000	35	37	-	Aluminium
SL-ALP-50mm x 50mm Surface	2000	50	37	-	Aluminium




MR16 HOUSING



SL-DL-22-R



SL-DL-23-S



SL-DL-168
(MOVABLE)



SL-DL-218-R (WHITE / BLACK)
(IP54)

FEDOR

Product Code	Dimension (in mm)		
	Diameter	Height	Cutout
SL-DL-22-R	110	65	φ90

MALTA

Product Code	Dimension (in mm)		
	Diameter	Height	Cutout
SL-DL-168-R	90	61	φ75

MORIS

Product Code	Dimension (in mm)		
	Diameter	Height	Cutout
SL-DL-23-S	110 X 110	65	φ90


NESTOR

Product Code	Dimension (in mm)		
	Diameter	Height	Cutout
SL-DL-218-R	85	65	φ75



TRACK CHANNEL &
ACCESSORIES

TRACK CHANNEL & ACCESSORIES

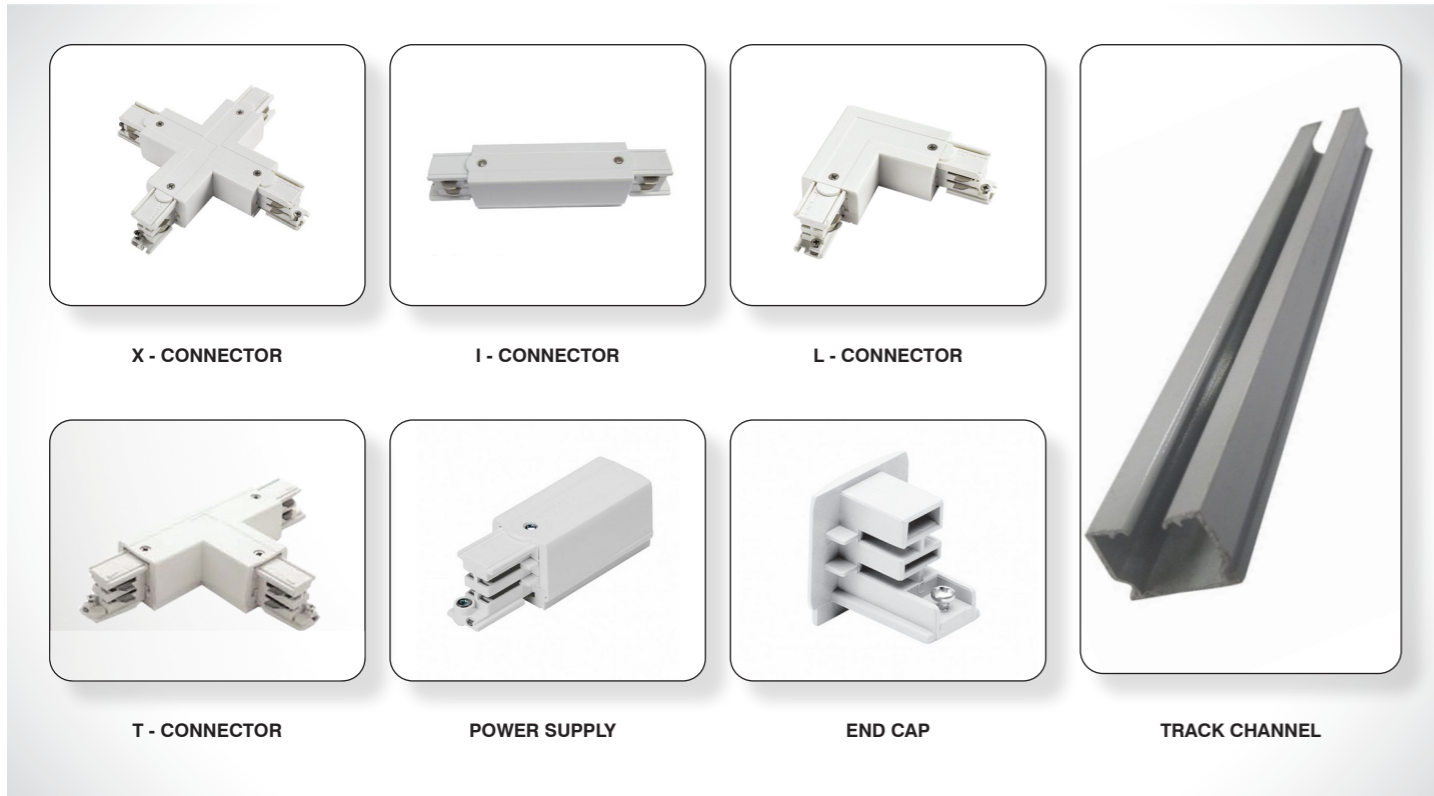

X - CONNECTOR

I - CONNECTOR

L - CONNECTOR

T - CONNECTOR

POWER SUPPLY

END CAP

TRACK CHANNEL

ACCESSORIES

TRACK CHANNEL

Product Code

SL-TJ-133-X-Connector (3CKT) / 4 line
SL-TJ-190-X-Connector (2CKT)

SL-TJ-133-I-Connector (3CKT) / 4 line
SL-TJ-187-I-Connector (2CKT)

SL-TJ-133-L-Connector (3CKT) / 4 line
SL-TJ-188-L-Connector (2CKT)

SL-TJ-133-T-Connector (3CKT) / 4 line
SL-TJ-189-T-Connector (2CKT)

SL-TJ-135-Power Supply (3CKT) / 4 line
SL-TJ-191-Power Supply (2CKT)

SL-TJ-134-End Cap (3CKT) / 4 line
SL-TJ-192-End Cap (2CKT)

Product Code

SL-TP-132-1mtr-3ckt / 4 line

SL-TP-123-2mtr-3ckt / 4 line

SL-TP-185-1mtr-2ckt

SL-TP-186-2mtr-2ckt

POWER SUPPLIES SERIES

POWER SUPPLIES



**CONSTANT VOLTAGE
POWER SUPPLIES
(COMPACT SIZE)**



WATERPROOF - POWER SUPPLIES



RGB CONTROLLER



MULTI FUNCTION REMOTE



TUNABLE STRIP CONTROLLER SERIES

NOTE

Constant Voltage Power Supplies - Compact Sizes - 12v

Product Code	Dimension
SL-PS-E-112-12w	60mm x 30mm x (H)25mm
SL-PS-E-89-30w	84mm x 31mm x (H)27mm
SL-PS-E-90-36w	84mm x 33mm x (H)27mm
SL-PS-E-91-48w	108mm x 40mm x (H)33mm
SL-PS-E-92-60w	108mm x 40mm x (H)33mm
SL-PS-E-93-72w	108mm x 40mm x (H)33mm
SL-PS-E-94-96w	168mm x 45mm x (H)38mm
SL-PS-E-95-120w	168mm x 45mm x (H)38mm
SL-PS-E-96-150w	168mm x 45mm x (H)38mm
SL-PS-E-97-180w	188mm x 61mm x (H)46mm
SL-PS-E-98-240w	188mm x 61mm x (H)46mm

Waterproof - Power Supplies - 12v

Product Code	Dimension
SL-WPS-44-30W	217mm x 29mm x (H)20mm
SL-WPS-45-60W	169mm x 520mm x (H)340mm
SL-WPS-46-100W	210mm x 685mm x (H)440mm
SL-WPS-48-150W	236mm x 132mm x (H)600mm
SL-WPS-66-200W	236mm x 132mm x (H)600mm

RGB-Controller & Amplifire

Product Code	Dimension
SL-RGB-C-50-144W	217mm x 29mm x (H)20mm
SL-RGB-A-51-144W	169mm x 520mm x (H)340mm



Disclaimer

The copyrights off all drawings, design and all the information contain in this catalogue shall remain the property of **Srishti Lighting** and shall not be used. published or copied in whole or part, without any written authorization from the **Srishti Lighting** .

Srishti Lighting has attempted to provide accurate and best of graphic information in this catalogue technical data figures are for guidance only, products illustration may differ from original.

Srishti Lighting reserves the right to make changes to the products, desings and specification in the interest of development or for further improvement.



www.srishtilighting.com